

Silent steel ball slide

FOCUS ON INNOVATION CLOSE TO SILENCE

Silent steel ball slide

Pay attention to innovation

Close to silence

- ✓ Durable and reliable
- ✓ Smoother pulling
- ✓ Scientific design
- ✓ Softer and quieter
- ✓ Easy installation



OUR FIVE ADVANTAGES

High Quality Bearing Slides

1



HIGH-QUALITY COLD-ROLLED STEEL

Made of high-quality raw materials with precision rolling, offering good toughness and high accuracy.

3



FINE PRODUCTION PROCESS

Precision manufacturing with solid and quiet steel balls.

5



HUMANIZED DESIGN

Soft closing with self-buffering and smooth transition.

2



PERFECT SURFACE TREATMENT

Multi-layer electroplating surface treatment with excellent wear resistance and corrosion resistance.

4



STRONG LOAD-BEARING CAPACITY

Built-in damping device effectively absorbs external force, eliminates noise and vibration caused by impact.

Light-Duty Slides

Light-duty slide rails for compact and furniture applications.



MS600-LD3201



3 Fold Ball Bearing Slide

-  Width: 32mm
-  Material: cold-rolled steel/Galvanized material
-  Length: 250-500mm (10"-20")
-  Thickness: 12 ± 0.2 mm
-  Maximum load: 12kg
-  The installed forms: drawer side
-  Surface treatment: electrophoresis black, electro-galvanized
-  Scope: Cabinet/Home furniture/Office furniture/Decoration project etc

Thickness: 0.8*0.8*0.8mm

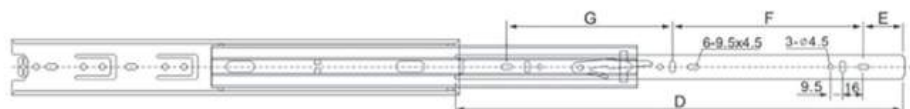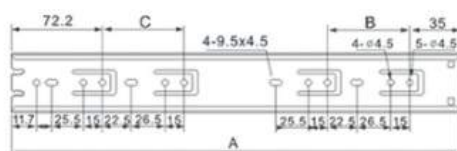

LS3201-250	250	64	-	247	48	-	160
LS3201-300	300	64	64	297	48	96	128
LS3201-350	350	64	64	347	48	128	128
LS3201-400	400	64	64	397	48	160	160
LS3201-450	450	64	64	447	48	160	192
LS3201-500	500	64	64	497	48	192	224
SIZE	A	B	C	D	E	F	G



MS600-LD3802



3 Fold Ball Bearing Slide

-  Width: 38mm
-  Material: cold-rolled steel
-  Length: 300-600mm (12"-24")
-  Thickness: 12.7±0.2mm
-  Maximum load: 20kg-25kg
-  The installed forms: drawer side
-  Surface treatment: electrophoresis black, electro-galvanized
-  Scope: Cabinet/Home furniture/Office furniture/Decoration project etc

Thickness: 1.2*1.2*1.2mm

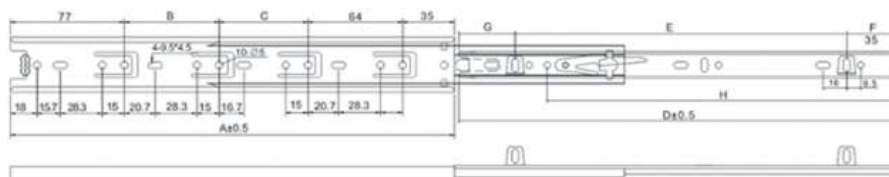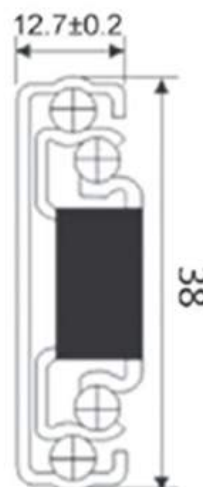

LS3802-250	250	—	74	247	128	35	84
LS3802-300	300	64	60	297	160	35	102
LS3802-350	350	64	110	347	256	35	56
LS3802-400	400	64	160	397	306	35	56
LS3802-450	450	64	210	447	356	35	56
LS3802-500	500	64	260	497	406	35	56
LS3802-550	550	64	310	547	456	35	56
LS3802-600	600	64	360	597	506	35	56
SIZE	A	B	C	D	E	F	G



MS600-LD3501



3 Fold Ball Bearing Slide

-  Width: 35mm
-  Material: cold-rolled steel/Galvanized material
-  Length: 250-600mm (10"-24")
-  Thickness: 12.2±0.2mm
-  Maximum load: 10kg-20kg
-  The installed forms: drawer side
-  Surface treatment: electrophoresis black, electro-galvanized
-  Scope: Cabinet/Home furniture/Office furniture/Decoration project etc

Thickness: 0.9*0.9*0.9mm

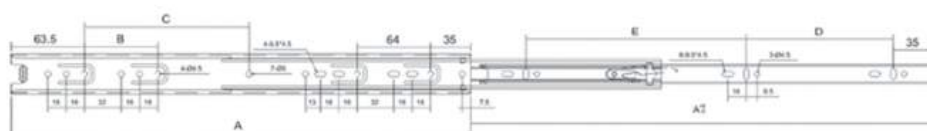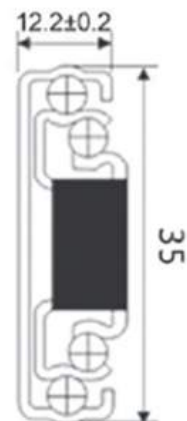

LS3501-250	250	—	42.5	170	—
LS3501-300	300	64	92.5	96	128
LS3501-350	350	64	116.5	96	160
LS3501-400	400	64	143.5	128	192
LS3501-450	450	64	168	160	192
LS3501-500	500	64	187.5	192	224
LS3501-550	550	64	213	192	256
LS3501-600	600	64	237.5	224	288
SIZE	A	B	C	D	E



MS600-LD4001



3 Fold Ball Bearing Slide

-  Width: 40mm
-  Material: cold-rolled steel/Galvanized material
-  Length: 250-600mm (10"-24")
-  Thickness: 12.2±0.2mm
-  Maximum load: 15kg-18kg
-  The installed forms: drawer side
-  Surface treatment: electrophoresis black, electro-galvanized
-  Scope: Cabinet/Home furniture/Office furniture/Decoration project etc

Thickness: 0.8*0.8*0.8mm

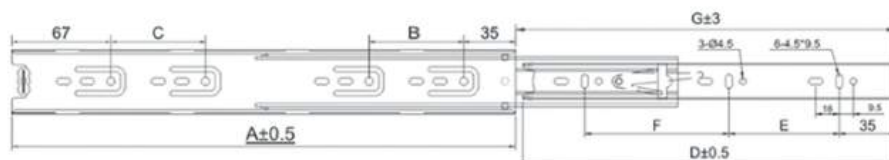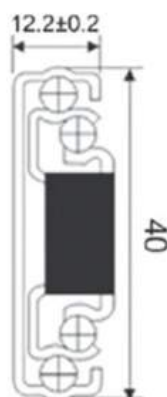

LS4001-250	250	64	-	-	87	247	64
LS4001-300	300	64	-	-	105	297	96
LS4001-350	350	64	94	-	91	347	96
LS4001-400	400	64	96	64	109	397	128
LS4001-450	450	64	96	64	95	447	160
LS4001-500	500	64	128	64	113	497	160
LS4001-550	550	64	160	64	99	547	192
LS4001-600	600	64	192	64	117	497	192
SIZE	A	B	C	D	E	F	G



MS600-LD3801



3 Fold Ball Bearing Slide

-  Width: 38mm
-  Material: cold-rolled steel
-  Length: 250-600mm (10"-24")
-  Thickness: 12.7±0.2mm
-  Maximum load: 20kg-25kg
-  The installed forms: drawer side
-  Surface treatment: electrophoresis black, electro-galvanized
-  Scope: Cabinet/Home furniture/Office furniture/Decoration project etc

Thickness: 1.2*1.2*1.2mm



LS3801-250	250	64	-	247	37	83	-
LS3801-300	300	64	64	297	37	111.5	111.5
LS3801-350	350	64	64	347	37	136.5	136.5
LS3801-400	400	64	64	397	37	161.5	161.5
LS3801-450	450	64	64	447	37	186.5	186.5
LS3801-500	500	64	64	497	37	211.5	211.5
LS3801-550	550	64	64	547	37	236.5	236.5
LS3801-600	600	64	64	597	37	261.5	261.5
SIZE	A	B	C	D	E	F	G


MS600-LD4301



3 Fold Ball Bearing Slide

-  Width: 43mm
-  Material: cold-rolled steel
-  Length: 250-600mm (10"-24")
-  Thickness: 12.7±0.2mm
-  Maximum load: 20kg-25kg
-  The installed forms: drawer side
-  Surface treatment: electrophoresis black, electro-galvanized
-  Scope: Cabinet/Home furniture/Office furniture/Decoration project etc

Thickness: 0.9*0.9*0.9mm

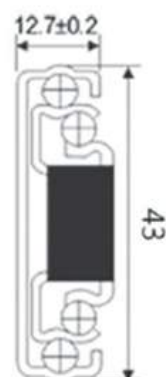

LS4301-250	250	160	-	160	-	-	-	-	30	-	-
LS4301-300	300	96	128	192	-	-	-	34	41.5	-	-
LS4301-350	350	96	160	224	-	-	-	66	59.5	-	-
LS4301-400	400	128	192	224	64	-	-	66	-	30.5	-
LS4301-450	450	160	192	224	128	-	-	66	64	15	-
LS4301-500	500	192	224	224	128	-	51	66	64	15	-
LS4301-550	550	192	256	224	128	96	-	66	64	15	-
LS4301-600	600	224	288	224	128	96	-	66	64	15	55.5
SIZE	A	B	C	D	E	F	G	H	I	J	K

MS600-LD4201





3 Fold Ball Bearing Slide

-  Width: 42mm
-  Material: cold-rolled steel
-  Length: 250-900mm (10"-36")
-  Thickness: 12.7±0.2mm
-  Maximum load: 20kg-25kg
-  The installed forms: drawer side
-  Surface treatment: electrophoresis black, electro-galvanized
-  Scope: Cabinet/Home furniture/Office furniture/Decoration project etc



Thickness: 0.9*0.9*0.9mm

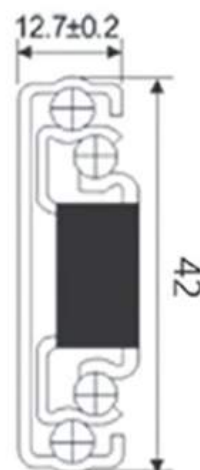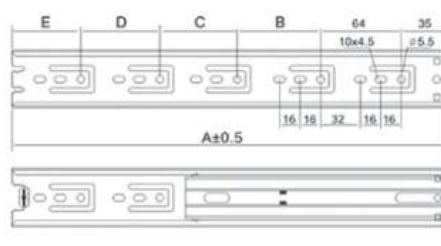

LS4201-250	250	96	-	-	55	247	64	96	50
LS4201-300	300	96	-	-	105	297	64	128	68
LS4201-350	350	96	94	-	91	347	96	160	54
LS4201-400	400	96	96	-	109	397	128	192	40
LS4201-450	450	96	96	64	95	447	160	192	58
LS4201-500	500	96	128	64	113	497	160	224	76
LS4201-550	550	96	192	64	99	547	192	224	94
LS4201-600	600	96	224	64	117	497	192	288	80
SIZE	A	B	C	D	E	F	G	H	H




MS600-LD2057




Anti-rust technology / Anti-collision noise-dampening pad / Internal lubricant / Solid steel balls




Installation dimensions

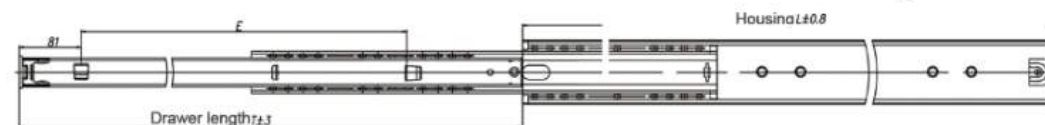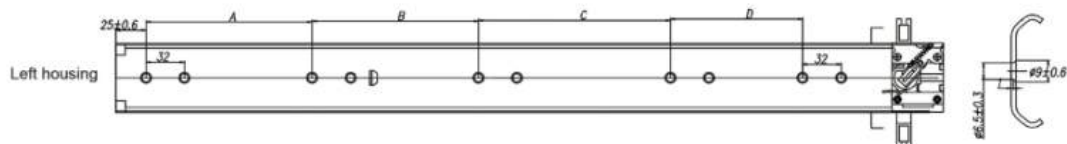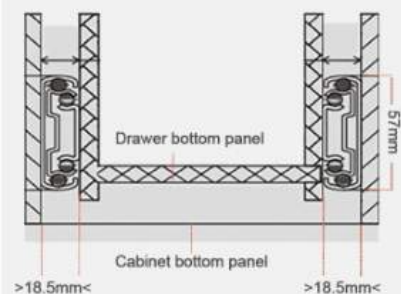

Left

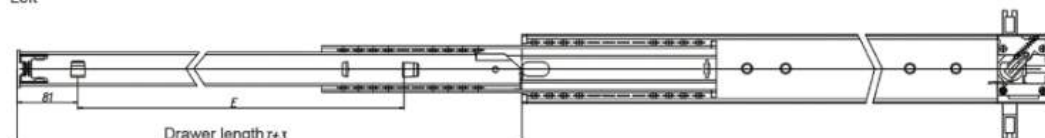

Right

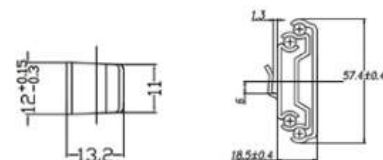

Specification

LENGTH: 16"-26(405MM-660MM)
MOUNTING CLEARANCE: 18.5MM(+0.5MM-0)
MAX. LOAD: 150KG OPENING STYLE: FULLY OPEN
TYPE OF MOUNTING: SIDE MOUNTING DETACHABILITY: DETACHABLE
SURFACE TREATMENT: ZINC PLATING-BLUE, BLACK, ELECTROPHORESIS, ETC
MATERIAL: COLD-ROLLED STEEL Material thickness: 2.0*1.8*2.0mm.
SCOPE OF APPLICATION: FILE CABINETS, KITCHEN CABINETS,
STORAGE CABINETS, DISPLAY CABINETS, TOOL BOXES, AND OTHER
HIGH-LOAD WOODEN AND STEEL DRAWERS.
FEATURES: DRAWERS AND CABINET WALL CAN BE SEPARATELY MOUNTED,
THE DRAWERS ARE CONVENIENT TO REMOVE AND CAN BE LOCKED WHEN
TRAVELLING TO THE END TO PREVENT THE DRAWERS FROM SLIDING,
WITH CUSTOMIZED LENGTH AND MOUNTING HOLES, AND LENGTH
OF EXTENSION CAN BE INCREASED.

Product Model	SIZE	L	A	B	C	D	E	T
A2057	16"	405	160	160			244	420
	18"	455	160	192			285	470
	20"	505	160	160	96		344	520
	22"	555	160	160	128		396	570
	24"	610	160	160	192		455	625
	26"	660	160	160	160	96	505	675



MS600-LD1057



Anti-rust technology / Anti-collision
noise-dampening pad / Internal
lubricant / Solid steel balls




Installation dimensions

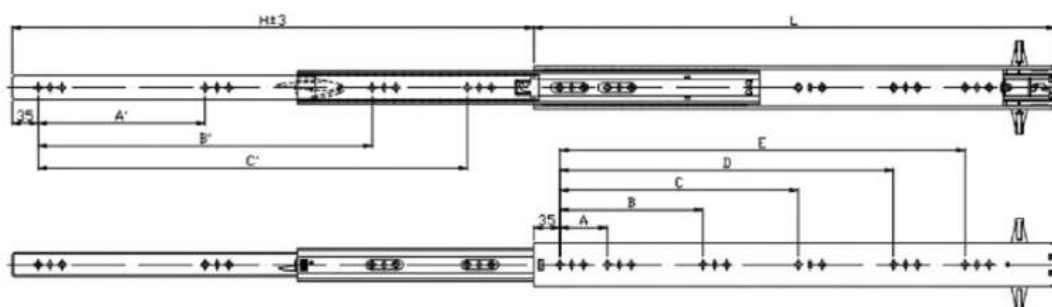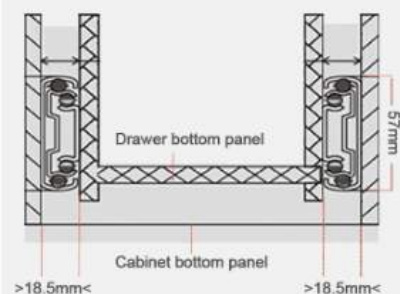

Specification

Length: 12" ~ 40" **Height:** 58mm
Slide Space: 19mm
Load: 130kgs
Finishing: Clear zinc plating, Yellow zinc plating,
 Black E-coating
Packing: 10 sets/carton (no screws)

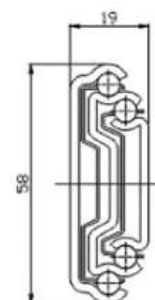

Product Model	SIZE	L	A	B	C	D	E	A'	B'	C'	H
1057-AT	12"	300	128					224			300
	14"	350	192					256			350
	16"	400	64	224				96	288		400
	18"	450	64	288				128	320		450
	20"	500	64	224	352			16	384		500
	22"	550	64	256	384			160	416		550
	24"	600	64	192	416			192	480		600
	26"	650	64	192	288	480		224	416	544	650
	28"	700	64	192	352	544		224	448	576	700
	30"	750	64	192	352	576		224	448	608	750
	32"	800	64	192	384	512	640	224	480	672	800
	34"	850	64	192	384	544	672	224	512	736	850
	36"	900	64	192	416	576	736	224	544	768	900
	38"	950	64	192	448	608	800	224	576	832	950
	40"	1000	64	192	448	640	832	224	640	864	1000



MS600-LD1057-C



Anti-rust technology / Anti-collision
noise-dampening pad / Internal
lubricant / Solid steel balls



Installation dimensions

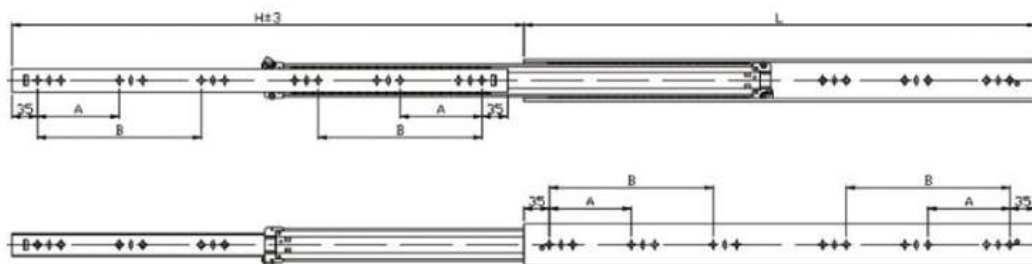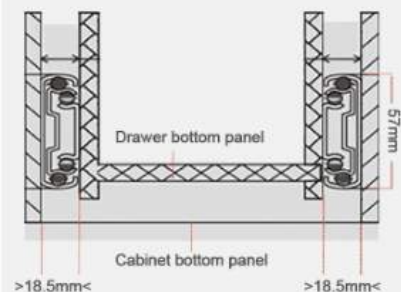

Specification

Length: 12" ~ 40"


Height: 58mm

Slide Space: 19mm

Load: 130kgs

Finishing: Clear zinc plating, Yellow zinc plating,
Black E-coating

Packing: 10 sets/carton (no screws)



Product Model	SIZE	L	A	B
1057-C	12"	300		
	14"	350		
	16"	400	64	
	18"	450	96	
	20"	500	96	
	22"	550	128	
	24"	600	128	
	26"	650	160	
	28"	700	192	
	30"	750	64	224
	32"	800	64	224
	34"	850	64	224
	36"	900	96	256
	38"	950	96	288
	40"	1000	128	320



MS600-LD1057-L



Anti-rust technology / Anti-collision
noise-dampening pad / Internal
lubricant / Solid steel balls



Installation dimensions

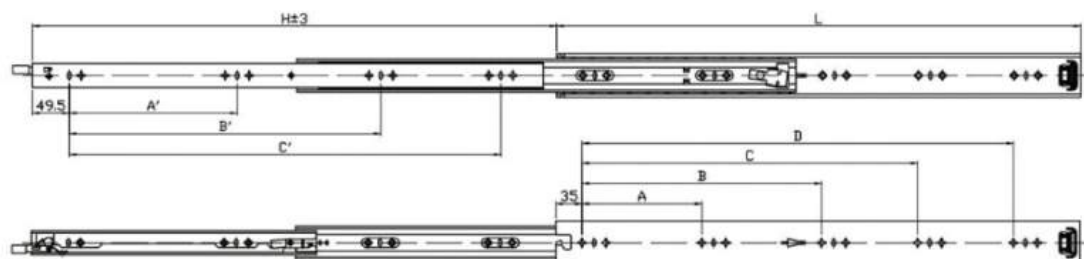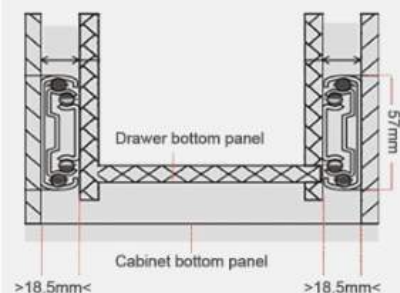

Specification

Length: 12" ~ 40"


Height: 57.7mm

Slide Space: 19mm

Load: 150kgs

Finishing: Clear zinc plating, Yellow zinc plating,
Black E-coating


Packing: 6 sets/carton (no screws)



Product Model	SIZE	L	A	B	C	D	A'	B'	C'	H
1057-LILO	12"	300	192				192			300
	14"	350	224				256			350
	16"	400	288				288			400
	18"	450	192	320			96	320		450
	20"	500	224	384			128	384		500
	22"	550	256	416			160	416		550
	24"	600	288	480			160	480		600


MS600-LD5801SD

Anti-rust technology / Anti-collision
noise-dampening pad / Internal
lubricant / Solid steel balls

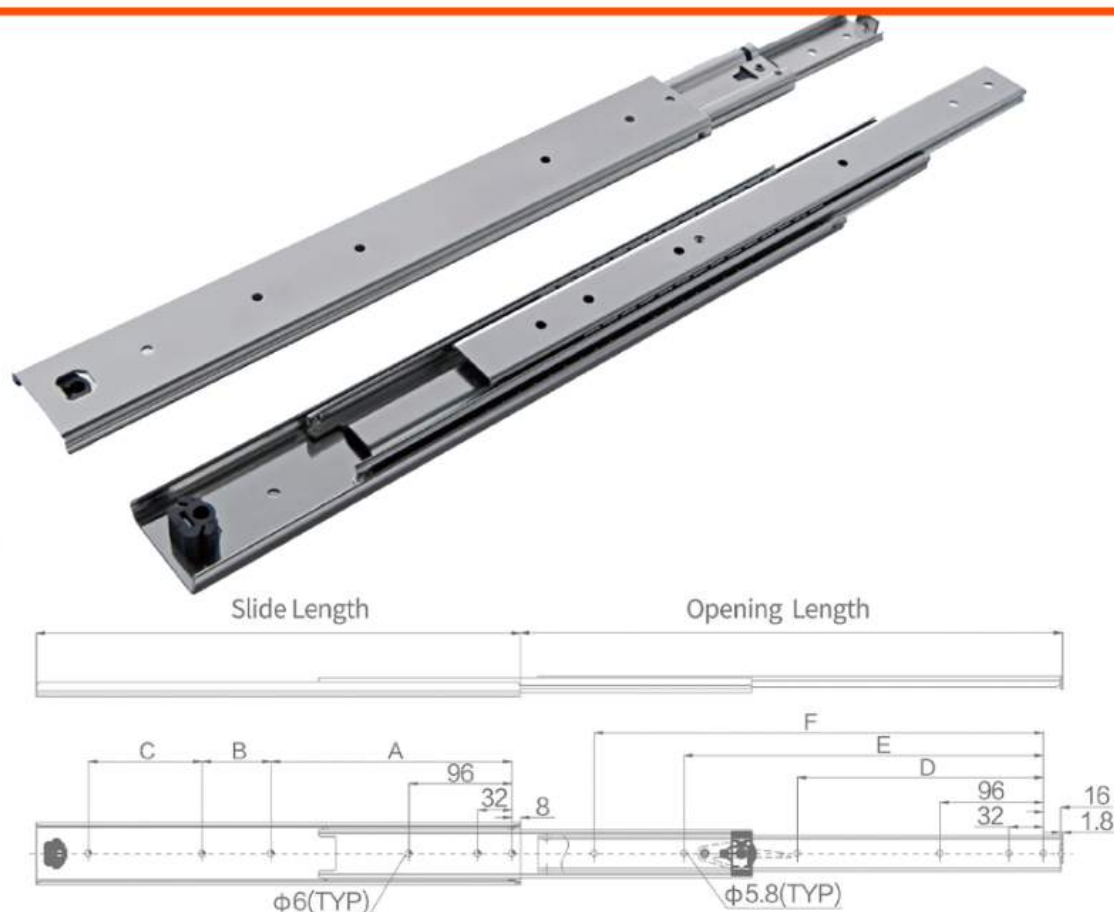


Specification

- Length: 10"-40" (250mm-1000mm)
- Mounting clearance: 19mm (+0.5mm-0)
- Max. Load: 90kg
- Opening style: Fully open
- Type of mounting: Side mounting
- Detachability: Detachable
- Surface treatment: Zinc plating-blue, black, electrophoresis, etc.
- Material: Cold-rolled steel
- Material thickness: 2.0*1.8*2.0MM
- Scope of application: file cabinets, kitchen carbinets, storage cabinets, display cabinets, tool boxes, and other high-load wooden and steel drawers.
- Features: drawers and cabinet wall can be separately mounted, the drawers are convenient to remove and can be locked when travelling to the end to prevent the drawers from sliding, with customized length and mounting holes, and length of extension can be increased.



Installation dimensions

unit:mm(inch)

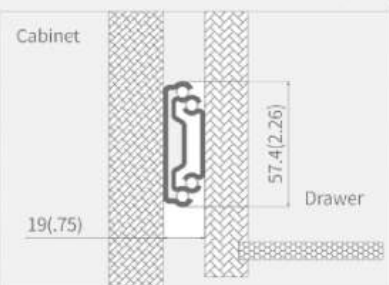


Product Model

产品型号 Model	Slide Length(inch)mm	Opening Length(inch)mm	Load(lb)kg	(mm) Hole Spacing					
				A	B	C	D	E	F
5801SD-01	250 (10")	250 (10")	50 (111)	192			192		
	300 (12")	300 (12")	55 (122)	224	32		224	256	
	350 (14")	350 (14")	65 (144)	224	64		224	288	
	400 (16")	400 (16")	70 (155)	224	128		256	352	
	450 (18")	450 (18")	80 (178)	224	160		288	384	
	500 (20")	500 (20")	90 (200)	224	160	64	192	320	44
	550 (22")	550 (22")	90 (200)	224	160	96	224	352	48
	600 (24")	600 (24")	90 (200)	224	160	160	224	384	54
	650 (26")	650 (26")	85 (189)	224	192	160	224	384	57
	700 (28")	700 (28")	80 (178)	224	192	224	224	416	64
	750 (30")	750 (30")	75 (167)	224	224	256	224	448	67
	800 (32")	800 (32")	70 (155)	224	224	288	256	480	73
	850 (34")	850 (34")	65 (144)	256	256	288	288	512	80
	900 (36")	900 (36")	60 (133)	288	256	288	288	544	83
	950 (38")	950 (38")	55 (122)	320	288	288	320	576	89
	1000 (40")	1000 (40")	50 (111)	352	288	288	320	576	92

MS600-LD1058-2



Anti-rust technology / Anti-collision
noise-dampening pad / Internal
lubricant / Solid steel balls

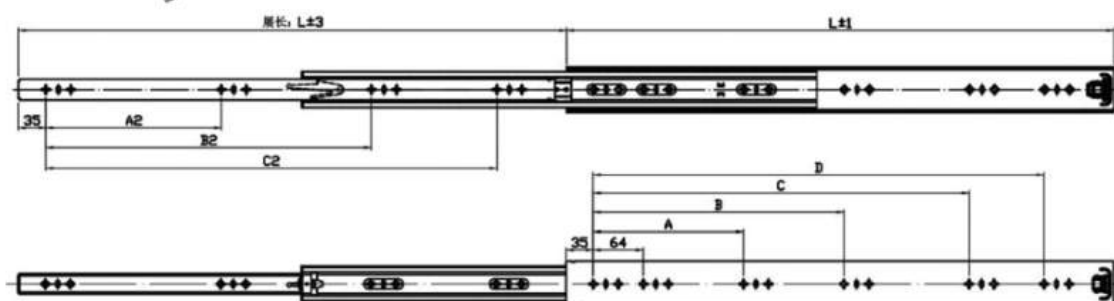

Specification

Length: 10" ~ 50"


Height: 58mm

Slide Space: 16mm


Load: 100kgs/50000Cycles

Finishing: Clear zinc plating, Yellow zinc plating,
Black E-coating

Packing: 10 sets/carton (no screws)



Installation dimensions

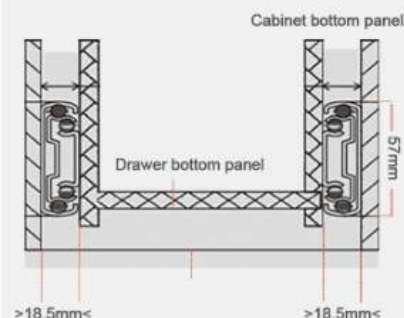

Product Model	SIZE	L	A	B	C	D	A2	B2	C2
1058-02	14"	350	224				96	256	
	16"	400	288				96	288	
	18"	450	192	320			128	320	
	20"	500	224	384			160	384	
	22"	550	256	416			192	416	
	24"	600	256	416	480		192	480	
	26"	650	192	288	448	512	224	384	512
	28"	700	192	320	480	576	224	416	576
	30"	750	192	352	512	608	224	448	608
	32"	800	192	384	544	672	224	480	672
	34"	850	192	416	576	736	224	512	736
	36"	900	192	448	608	768	224	512	768
	38"	950	224	512	672	832	256	544	832
	40"	1000	224	512	672	864	256	576	864
	42"	1050	224	512	704	896	256	608	896
	44"	1100	224	512	704	928	256	608	928
	46"	1150	224	512	736	960	256	640	960
	48"	1200	224	512	768	1024	256	640	992
	50"	1250	224	576	832	1088	320	672	1056

Medium-Duty Slides

Medium-duty slide rails for general furniture and equipment applications.


MS600-MD4501



3 Fold Ball Bearing Slide

-  Width: 45mm
-  Material: cold-rolled steel
-  Length: 250-900mm (10"-36")
-  Thickness: 12.7±0.2mm
-  Maximum load: 20kg-45kg
-  The installed forms: drawer side
-  Surface treatment: electrophoresis black, electro-galvanized
-  Scope: Cabinet/Home furniture/Office furniture/Decoration project etc

Thickness: 1.2*1.2*1.4mm

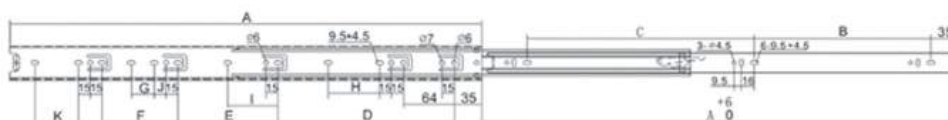

LS4501-250	250	-	-	247	64	96
LS4501-300	300	-	-	297	96	128
LS4501-350	350	64	-	347	96	160
LS4501-400	400	96	-	397	128	192
LS4501-450	450	96	64	447	128	224
LS4501-500	500	128	64	497	160	256
LS4501-550	550	192	64	547	224	224
LS4501-600	600	224	64	597	224	288
LS4501-650	650	256	64	647	320	256
LS4501-700	700	320	64	697	288	288
SIZE	A	B	C	D	E	F

MS600-MD4502





3 Fold Ball Bearing Slide

-  Width: 45mm
-  Material: cold-rolled steel
-  Length: 300-600mm (12"-24")
-  Thickness: 12.7±0.2mm
-  Maximum load: 30kg-45kg
-  The installed forms: drawer side
-  Surface treatment: electrophoresis black, electro-galvanized
-  Scope: Cabinet/Home furniture/Office furniture/Decoration project etc

Thickness: 1.2*1.2*1.4mm



Soft closing system, more quiet

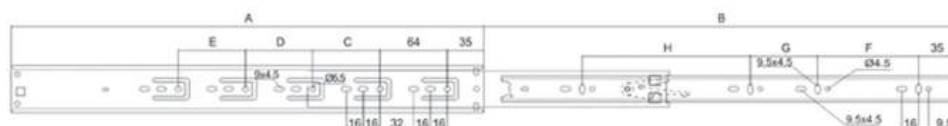

LS4502-300	300	290	64	—	—	96	120	—
LS4502-350	350	350	96	—	—	128	128	—
LS4502-400	400	400	96	64	—	128	160	—
LS4502-450	450	450	96	96	—	96	64	160
LS4502-500	500	500	96	96	64	128	64	192
LS4502-550	550	550	96	128	64	160	64	224
LS4502-600	600	600	96	160	64	160	64	256
SIZE	A	B	C	D	E	F	G	H

MS600-MD4503





3 Fold Ball Bearing Slide

-  Width: 45mm
-  Material: cold-rolled steel
-  Length: 300-600mm (12"-24")
-  Thickness: 12.7±0.2mm
-  Maximum load: 30kg-45kg
-  The installed forms: drawer side
-  Surface treatment: electrophoresis black, electro-galvanized
-  Scope: Cabinet/Home furniture/Office furniture/Decoration project etc

Thickness: 1.2*1.2*1.4mm



Soft Closing System, More Quiet

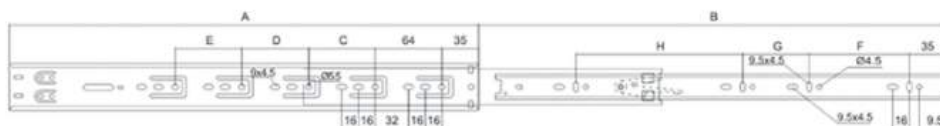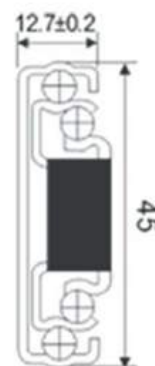

LS4503-300	300	290	—	—	—	96	120	—
LS4503-350	350	350	94	—	—	128	128	—
LS4503-400	400	400	96	—	—	128	160	—
LS4503-450	450	450	96	64	—	96	64	160
LS4503-500	500	500	96	96	—	128	64	192
LS4503-550	550	550	96	196	64	160	64	224
LS4503-600	600	600	96	196	96	160	64	256
SIZE	A	B	C	D	E	F	G	H

MS600-MD4504





3 Fold Ball Bearing Slide

-  Width: 45mm
-  Material: cold-rolled steel
-  Length: 300-600mm (12"-24")
-  Thickness: 12.7±0.2mm
-  Maximum load: 30kg-45kg
-  The installed forms: drawer side
-  Surface treatment: electrophoresis black, electro-galvanized
-  Scope: Cabinet/Home furniture/Office furniture/Decoration project etc

Thickness: 1.2*1.2*1.4mm



Soft Closing System, More Quiet

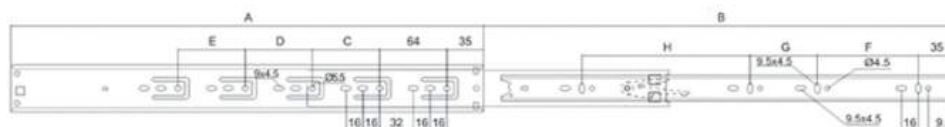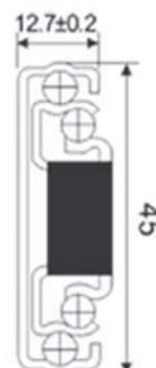

LS4504-300	300	290	64	—	—	96	120	—
LS4504-350	350	350	96	—	—	128	128	—
LS4504-400	400	400	96	64	—	128	160	—
LS4504-450	450	450	96	96	—	96	64	160
LS4504-500	500	500	96	96	64	128	64	192
LS4504-550	550	550	96	128	64	160	64	224
LS4504-600	600	600	96	160	64	160	64	256
SIZE	A	B	C	D	E	F	G	H

MS600-MD4505





3 Fold Ball Bearing Slide

-  Width: 45mm
-  Material: cold-rolled steel
-  Length: 300-600mm (12"-24")
-  Thickness: 12.7±0.2mm
-  Maximum load: 30kg-45kg
-  The installed forms: drawer side
-  Surface treatment: electrophoresis black, electro-galvanized
-  Scope: Cabinet/Home furniture/Office furniture/Decoration project etc

Thickness: 1.2*1.2*1.4mm



Soft Closing System, More Quiet

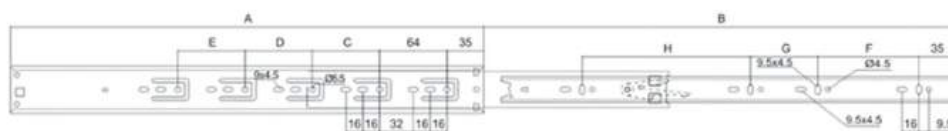

LS4505-300	300	290	64	—	—	96	120	—
LS4505-350	350	350	96	—	—	128	128	—
LS4505-400	400	400	96	64	—	128	160	—
LS4505-450	450	450	96	96	—	96	64	160
LS4505-500	500	500	96	96	64	128	64	192
LS4505-550	550	550	96	128	64	160	64	224
LS4505-600	600	600	96	160	64	160	64	256
SIZE	A	B	C	D	E	F	G	H


MS600-MD4506




3 Fold Ball Bearing Slide

-  Width: 45mm
-  Material: cold-rolled steel
-  Length: 250-600mm (10"-24")
-  Thickness: 12.7±0.2mm
-  Maximum load: 45kg
-  The installed forms: drawer side
-  Surface treatment: electrophoresis black, electro-galvanized
-  Scope: Cabinet/Home furniture/Office furniture/Decoration project etc

Thickness: 1.2*1.2*1.4mm



Soft Closing System, More Quiet

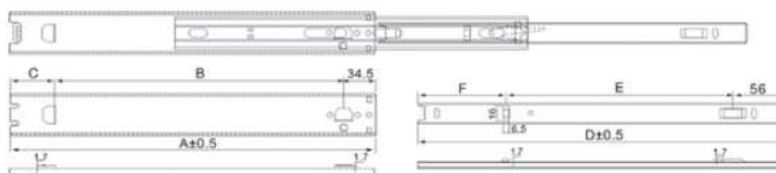

LS4506-250	250	164.5	50	247	96	95
LS4506-300	300	214.5	50	297	146	95
LS4506-350	350	264.5	50	347	196	95
LS4506-400	400	314.5	50	397	246	95
LS4506-450	450	364.5	50	447	296	95
LS4506-500	500	414.5	50	497	346	95
LS4506-550	550	464.5	50	547	396	95
LS4506-600	600	514.5	50	597	446	95
SIZE	A	B	C	D	E	F

MS600-MD4509





3 Fold Ball Bearing Slide

-  Width: 45mm
-  Material: cold-rolled steel
-  Length: 300-600mm (12"-24")
-  Thickness: 12.7±0.2mm
-  Maximum load: 35kg
-  The installed forms: drawer side
-  Surface treatment: electrophoresis black, electro-galvanized
-  Scope: Cabinet/Home furniture/Office furniture/Decoration project etc

Thickness: 1.2*1.2*1.4mm

Soft Closing System, More Quiet

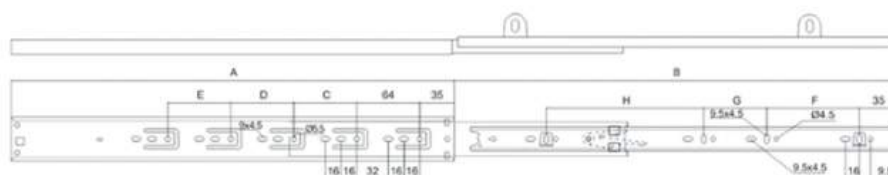

LS4509-300	300	290	64	—	—	96	—	110
LS4509-350	350	350	96	—	—	128	—	128
LS4509-400	400	400	96	64	—	128	—	160
LS4509-450	450	450	96	96	—	96	64	224
LS4509-500	500	500	96	96	64	128	64	256
LS4509-550	550	550	96	128	64	160	64	288
LS4509-600	600	600	96	160	64	160	64	320
SIZE	A	B	C	D	E	F	G	H


MS600-MD4510



3 Fold Ball Bearing Slide

-  Width: 45mm
-  Material: SUS304 stainless steel
-  Length: 250-600mm (10"-24")
-  Thickness: 12.7±0.2mm
-  Maximum load: 25kg
-  The installed forms: drawer side
-  Surface treatment: sanded, polished
-  Scope: Cabinet/Home furniture/Office furniture/Decoration project etc

Thickness: 1.0*1.0*1.0mm



LS4510-250	250	-	-	247	64	96
LS4510-300	300	-	-	297	96	128
LS4510-350	350	64	-	347	96	160
LS4510-400	400	96	-	397	128	192
LS4510-450	450	96	64	447	128	224
LS4510-500	500	128	64	497	160	256
LS4510-550	550	192	64	547	224	224
LS4510-600	600	224	64	597	224	288
SIZE	A	B	C	D	E	F


Heavy-Duty Slides

Heavy-duty slide rails for industrial, equipment and high-load applications.

MS600-HD1050-AT



Anti-rust technology / Anti-collision
noise-dampening pad / Internal
lubricant / Solid steel balls

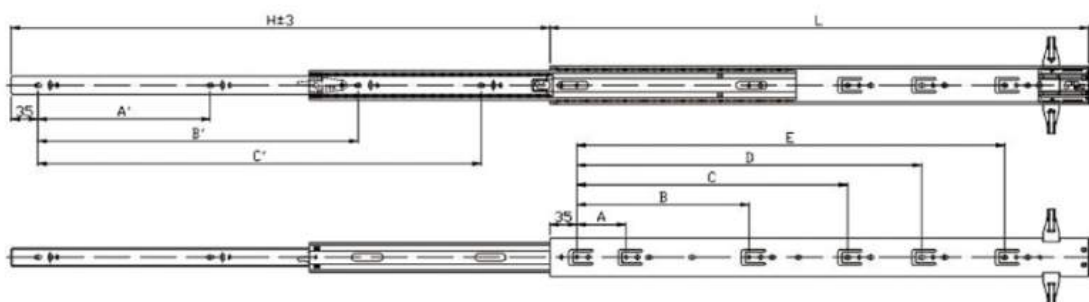

Specification


Length: 12" ~ 28" **Height:** 49.5mm

Slide Space: 13mm

Load: 68kgs

Finishing: Clear zinc plating, Yellow zinc plating,
Black E-coating

Packing: 10 sets/carton (no screws)

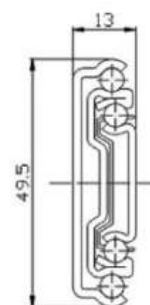

Installation dimensions

Cabinet bottom panel

Drawer bottom panel

57mm

>18.5mm<


>18.5mm<

Product Model	SIZE	L	A	B	C	D	E	A'	B'	C'	H
1050-AT	12"	300	64					96	192		300
	14"	350	64	224				128	256		350
	16"	400	64	224				128	320		400
	18"	450	64	224				160	352		450
	20"	500	64	224	352			192	416		500
	22"	550	64	224	352	416		224	448		550
	24"	600	64	224	352	480		224	512		600
	26"	650	64	224	352	512		256	544		650
	28"	700	64	224	352	480		288	608		700
	30"	750	64	224	352	480	608	288	640		750
	32"	800	64	224	352	480	672	256	512	704	800

MS600-HD1050-H



Anti-rust technology / Anti-collision
noise-dampening pad / Internal
lubricant / Solid steel balls

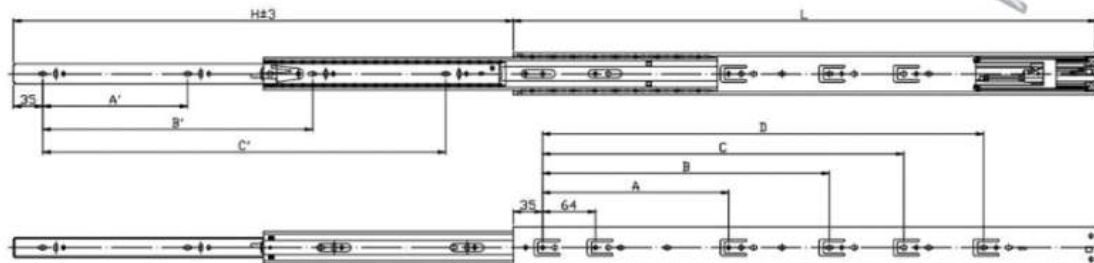

Specification


Length: 14" ~ 32" **Height:** 50mm

Slide Space: 13mm


Load: 60kgs/50000Cycles

Finishing: Clear zinc plating, Yellow zinc plating,
Black E-coating

Packing: 10 sets/carton (no screws)

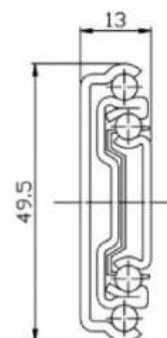

Installation dimensions

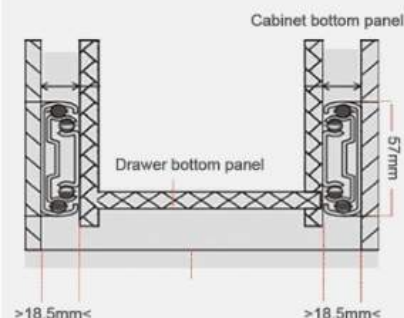


Product Model	SIZE	L	A	B	C	D	A'	B'	C'	H
1050-HD	10"	250						166		200
	12"	300					96	216		300
	14"	350	192				128	256		350
	16"	400	224				128	288		400
	18"	450	224	288			160	320		450
	20"	500	224	352			192	384		500
	22"	550	224	352			224	416		550
	24"	600	224	352	448		224	480		600
	26"	650	224	352	480		256	544		650
	28"	700	224	352	480		288	576		700
	30"	750	224	352	480	576	288	640		750
	32"	800	224	352	480	608	256	512	672	800

MS600-HD1050-L



Anti-rust technology / Anti-collision
noise-dampening pad / Internal
lubricant / Solid steel balls

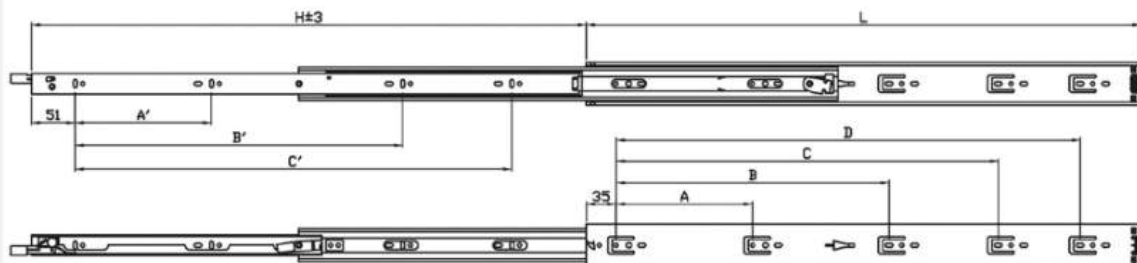

Specification


Length: 12"~40" **Height:** 50mm

Side Space: 13mm


Load: 68kg / 50000 Cycles

Finishing: Clear zinc plating, Yellow zinc plating,
Black E-coating

Packing: 10 sets/carton (no screws)



Installation dimensions

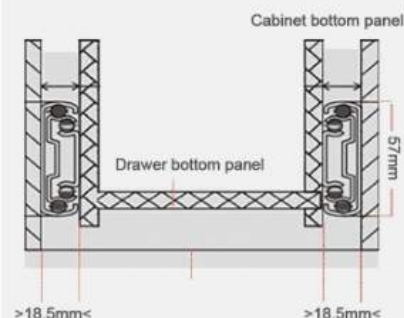

Product Model	SIZE	L	A	B	C	D	A'	B'	C'	H
1050-LILO	12"	300	192				192			300
	14"	350	224				256			350
	16"	400	256				256			400
	18"	450	64	256	352		96	320		450
	20"	500	64	256	384		96	384		500
	22"	550	128	320	416		128	384		550
	24"	600	128	352	480		160	416		600
	26"	650	160	352	512		192	384	512	650
	28"	700	160	384	544		192	416	576	700
	30"	750	160	448	608		192	448	608	750
	32"	800	128	384	544	672	192	480	672	800
	34"	850	128	416	576	736	224	512	704	850
	36"	900	160	448	640	800	224	576	768	900
	38"	950	192	480	672	832	224	608	832	950
	40"	1000	192	512	704	864	256	640	864	1000

MS600-HD1551-A



STRENGTHEN THE TENDON STRUCTURE




DOUBLE ROW
SOLID STEEL BALL



Specification

Height: 51.5mm;
Material thickness: 1.5"1.5"1.5"/1.8"1.5"1.5MM
Material: Q235 high-strength cold-rolled strip steel
Dynamic load capacity: 68kg/38 inches;
Installation method: slide installation;
Surface treatment: blue white zinc, electrophoretic black
Even metric length 10 inches (250MM) ~ 40 inches (1000MM);
Features: 1 full extension, heavy duty 2 detachable installation function
Application: suitable for household, office supplies,
Heavy duty drawers such as electrical tool cabinets.

Installation dimensions

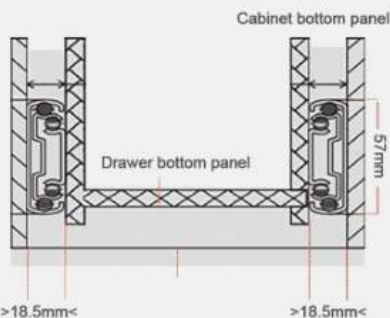

Product Model	SIZE	L	L1	A'	B'	C'	A	B	C	D	E	F	G
A1551	10"	250	250	160			64		160				
	11"	280	290	96	192		64		160				
	12"	300	310	96	208		64			192			96
	13"	330	340	96	224		64			224			96
	14"	350	360	128	256		64			224			96
	15"	380	390	128	288		64			224			96
	16"	400	410	128	320		64			224	288		96
	17"	430	440	128	320		64	224		352	288		96
	18"	450	460	160	352		64			224	352		96
	19"	480	490	160	352		64	224	352				96
	20"	500	508	192	416		64	224	352	416			96
	22"	550	565	224	448		64	224	352		416	64	96
	24"	600	615	224	512		64	224	352	480			96
	26"	650	665	256	544		64	224	352	512			96
	28"	700	715	288	608		64	224	352	480	608		96
	30"	750	765	320	640		64	224	352	480	640		96
	32"	800	815	256	512	704	64	224	384	544	704		96
	34"	850	865	256	512	768	64	224	384	544	736		96
	36"	900	915	256	544	800	64	224	416	576	768		96
	38"	950	965	288	576	864	64	256	448	640	832		96
40"	1000	1010	288	608	896	64	256	480	704	896		96	







MS600-HD1551



Anti-rust technology / Anti-collision noise-dampening pad / Internal lubricant / Solid steel balls



Installation dimensions

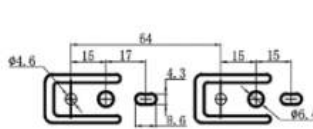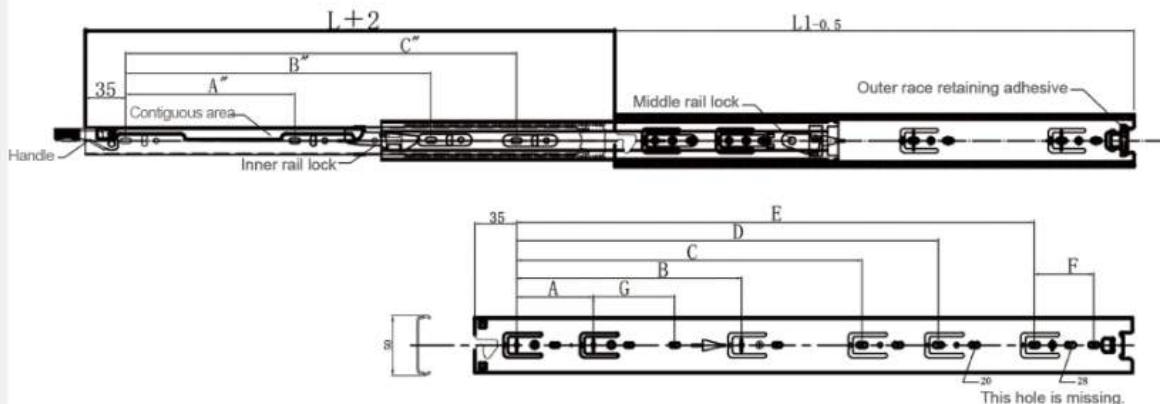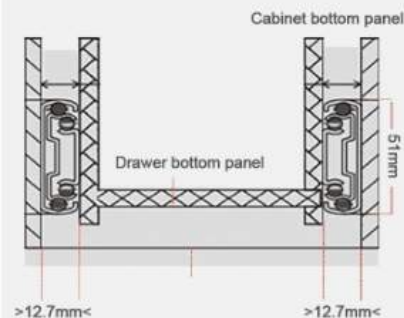

Specification

Height: 51.5mm;

Material thickness: 1.5*1.5*1.5/1.8*1.5*1.5MM

Material: Q235 high-strength cold-rolled strip steel

Dynamic load capacity: 68Kg/18 inches;

Installation method: side installation;

Surface treatment: blue white zinc, electrophoretic black

Even metric length 10 inches (250MM) ~ 40 inches (1000MM);

Features: 1 full extraction, heavy duty 2 detachable installation function

Application: suitable for household, office supplies,

Heavy duty drawers such as electrical tool cabinets.

Two-way locking functionThe drawer can be opened or closed by pressing the handle, and it will be locked when fully expanded or closed to prevent accidental sliding out, which can ensure the stability and safety of the drawer.

Product Model	SIZE	L	L1	A'	B'	C'	A	B	C	D	E	F	G
C1551	12"	300	310	96	208				192				
	14"	350	360	128	256		64		224				
	16"	400	410	128	288		64		224	288			
	18"	450	460	160	352		64		224	352			
	20"	500	510	192	416		64		224	352	416		
	22"	550	560	224	448		64	256	352		416	64	96
	24"	600	610	224	512		64	256	352	480			96
	26"	650	660	256	544		64	192	352	512			
	28"	700	710	288	608		64	224	352	480	608		96
	30"	750	760	288	640		64	224	352	480	640		96
	32"	800	810	256	512	704	64	224	384	544	704		96
	34"	850	850	256	512	736	64	224	384	544	736		96
	36"	900	900	256	544	800	64	224	416	576	768		96
	38"	950	950	288	576	864	64	224	448	640	832		96
	40"	1000	1000	288	608	896	64	224	480	704	896		96

Patented Product





MS600-HD2053-A



ANTI-RUST
TECHNOLOGY




BEAD FRAME MATERIAL
THICKNESS 1.0MM

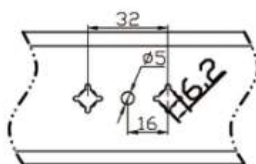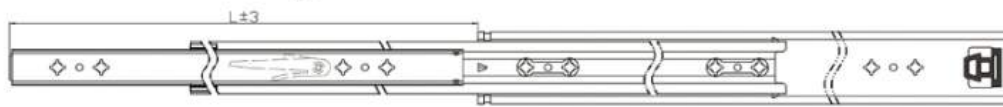

Specification

Height: 53.3mm;
Material: Q235 high-strength cold-rolled strip steel;
Dynamic load bearing: 130Kg/18 inch;
Installation method: side installation;
Surface treatment: blue-white zinc;
Even metric length is 8 inches (200mm)~40 inches (1000mm);
Features: 1. Full extraction and heavy load; 2. detachable installation function;
Application: suitable for home, electrical appliances, tool cabinets and other large and heavy drawers.

Installation dimensions

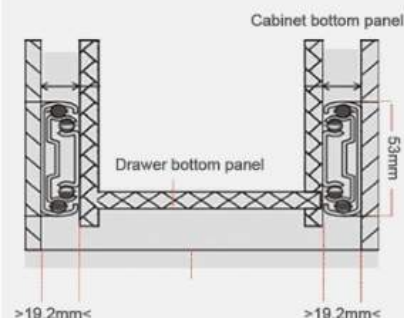


Product Model	SIZE	L	L1	A	B	C	D	E	F
A2053	8"	200	200	96			144		
	10"	250	250	128			160		
	12"	300	300	192			192		
	14"	350	350	224			224		
	16"	400	400	128	160		96	192	
	18"	450	450	160	160		128	192	
	20"	500	500	192	192		160	224	
	22"	550	550	192	224		192	224	
	24"	600	600	128	160	192	192	160	128
	26"	650	650	160	160	192	192	192	160
	28"	700	700	192	192	192	192	192	192
	30"	750	750	192	192	192	192	224	192
	32"	800	800	224	224	224	224	224	224
	34"	850	850	224	224	224	224	224	224
	36"	900	900	256	256	256	256	256	256
	38"	950	950	256	288	288	256	288	288
	40"	1000	1000	288	288	288	288	288	288

MS600-HD2053-1




Through the internal recessed design and the high-intensity plastic coordination of the mid-rail, the order is pulled out during the drawer development process. To ensure the stability and safety of the drawer.

Patented Product

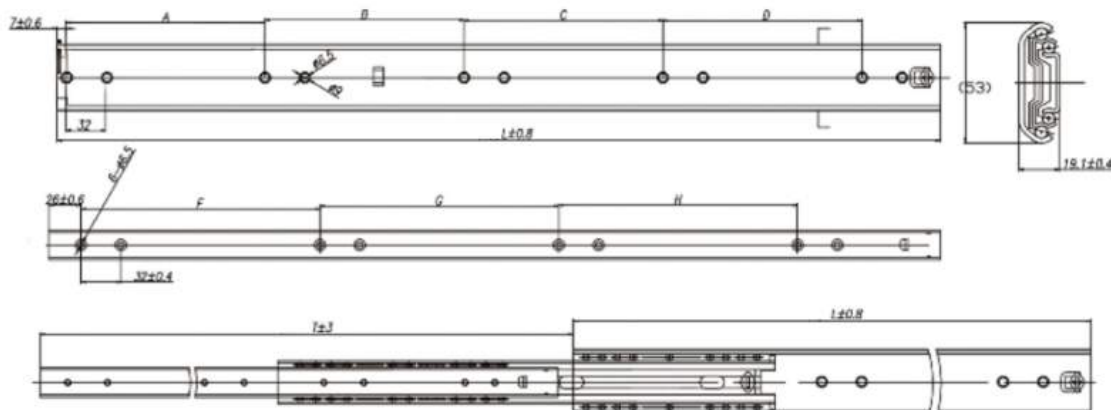


Specification

Length: 12"-28" (305mm-710mm)
 Installation clearance: 19.2MM(+0.5MM-0)
 Maximum load: 125KG
 Open mode: fully open installation
 mode: side separation mode: detachable
 Surface treatment: plating blue zinc, black zinc, electrophoresis, etc.
 Material: cold-rolled sheet material thickness: 2.0 * 2.0*2.0*2.0MM
 Scope: filing cabinets, cupboards, lockers, display cabinets, tool boxes and other heavy wooden and steel drawers.
 Features: the drawer and cabinet wall can be installed separately, and it is convenient for the drawer to run to the end when it is detached.
 With locking function, it can prevent self-sliding and can customize different lengths and hole positions.




Installation dimensions

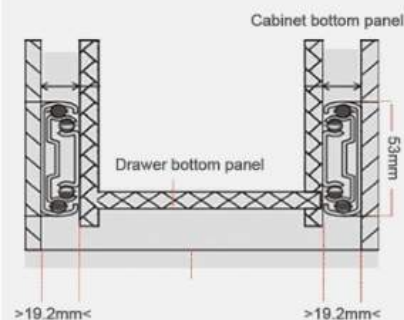

Product Model	SIZE	L	A	B	C	D	F	G	H	T
A2053-01	12"	305	224				224			320
	14"	355	160	96			224			370
	16"	405	160	160			192	96		420
	18"	455	160	224			192	160		470
	20"	505	160	160	96		192	192		520
	22"	555	160	160	160		192	256		570
	24"	610	160	160	192		192	192	96	625
	26"	660	160	160	160	96	192	192	160	675
	28"	710	160	160	160	160	192	192	192	725

Patented Product


MS600-HD2053-S1

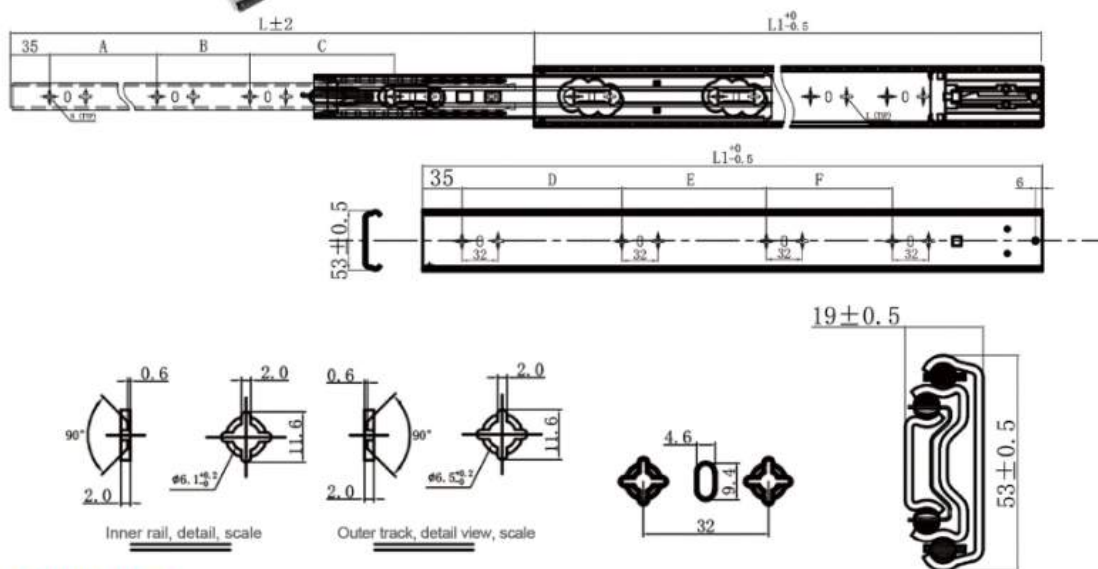

Specification

Height: 53.3mm;
 Material: Q235 high-strength cold-rolled strip steel;
 Dynamic load bearing: 115Kg/18 inch;
 Installation method: side installation;
 Surface treatment: blue-white zinc;
 Even metric length is 12 inches (300mm)~40 inches (1000mm);
 Features: 1. Full extraction and heavy load;
 2, detachable installation function;
 Application: suitable for home, electrical appliances,
 tool cabinets and other large and heavy drawers.
 Material thickness: 2.0 * 2.0*2.0*2.0MM

Installation dimensions

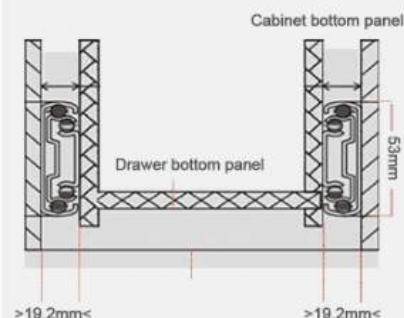


Product Model	SIZE	L1	L	A	B	C	D	E	F
B2053-S1	12"	300	315	224			128		
	14"	350	365	128	128		160		
	16"	400	415	128	160		224		
	18"	450	465	160	160		256		
	20"	500	515	192	192		160	160	
	22"	550	565	192	224		192	160	
	24"	600	615	224	256		224	192	
	26"	650	665	256	256		256	224	
	28"	700	715	228	228		288	224	
	30"	750	765	224	224	192	192	192	160
	32"	800	815	224	256	192	192	192	192

MS600-HD2053




Anti-rust technology / Anti-collision
noise-dampening pad / Internal
lubricant / Solid steel balls

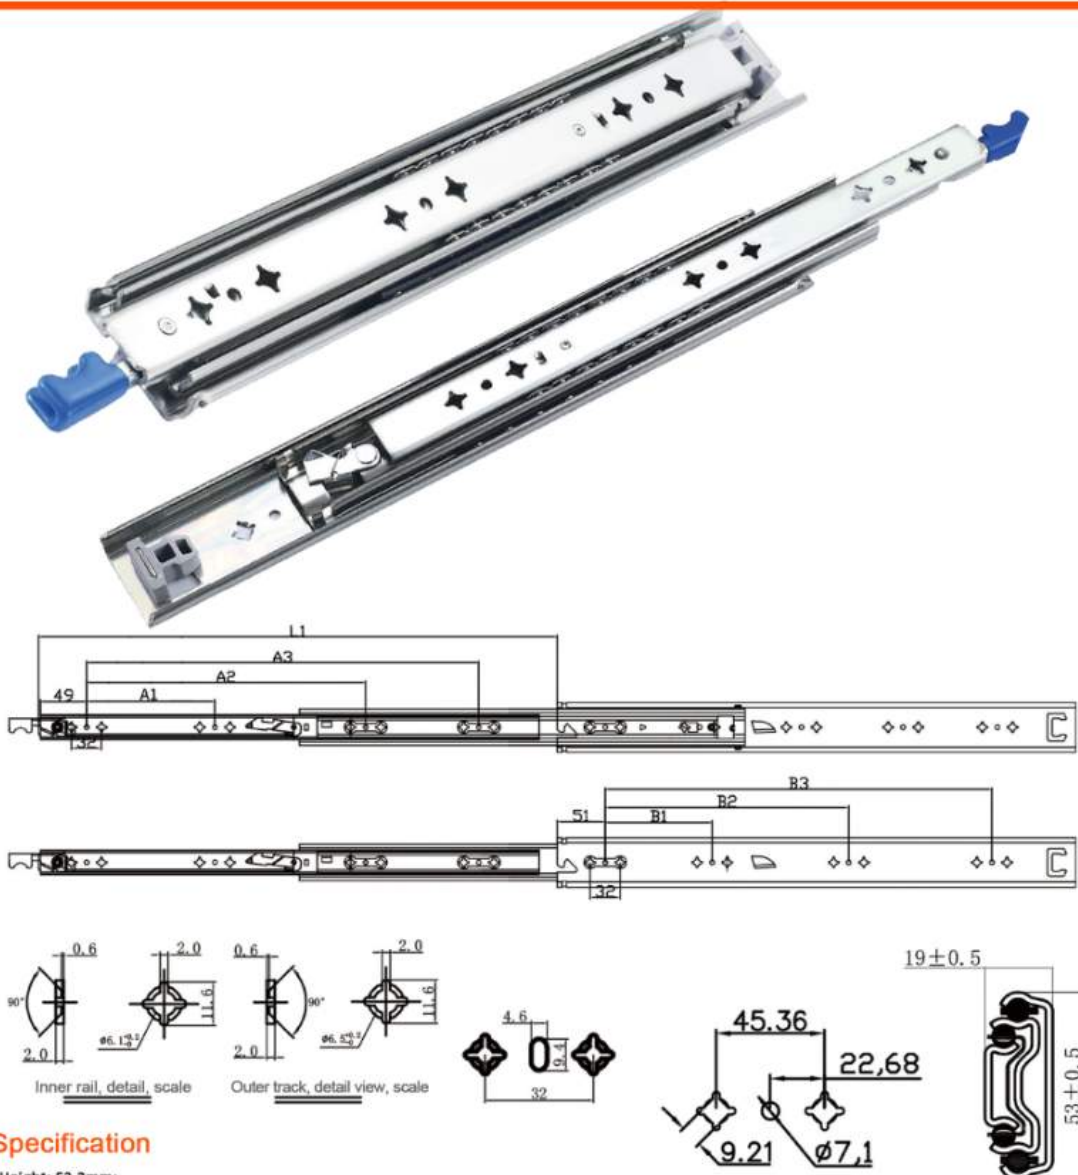

Specification


Height: 53.3mm;
Material: Q235 High-strength Cold-rolled Strip Steel;
Dynamic Load Bearing: 115kg/18 Inch;
Installation Method: Side Installation;
Surface Treatment: Blue-white Zinc;
Even Metric Length Is 10 Inches (250mm)~80 Inches (2000mm);
Features: 1. Full Extraction And Heavy Load;
2. Detachable Installation Function;
Application: Suitable For Oversized And Heavy-duty Drawers In Rvs, Campers,
Tool Cabinets, Etc.
Material thickness: 2.0 * 2.0*2.0*2.0MM

Installation dimensions

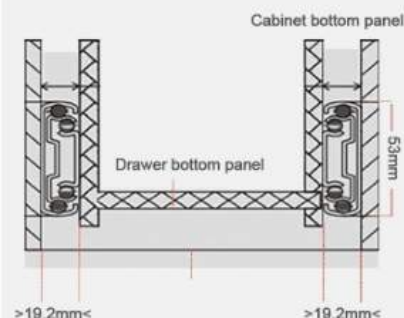


Product Model	SIZE	L1	A1	A2	A3	B1	B2	B3
C2053	14"	350	96	128		128	96	
	16"	400	128	160		160	128	
	18"	450	128	192		192	128	
	20"	500	160	224		224	160	
	22"	550	192	224		224	192	
	24"	600	192	228		256	224	
	26"	650	192	192	128	128	192	192
	28"	700	192	192	192	128	224	224
	30"	750	192	224	192	160	224	192
	32"	800	224	224	224	160	224	224
	34"	850	224	256	192	224	224	224
	36"	900	256	256	256	256	256	256
	38"	950	256	288	288	256	288	288
	40"	1000	288	288	288	288	288	288

MS600-HD1053-L

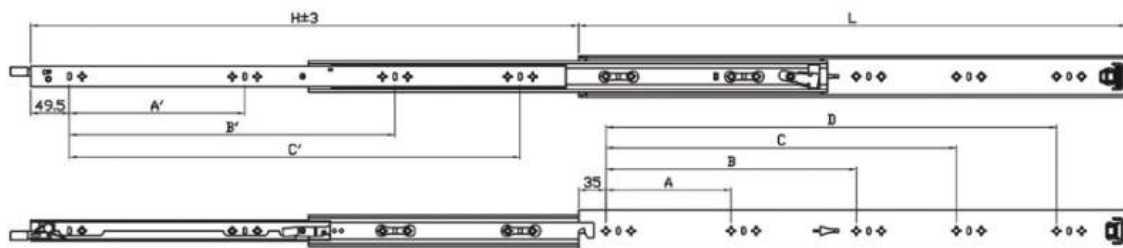


Specification

Length: 12"~40" **Height:** 53mm
Side Space: 18.7mm
Load: 100kg / 50000 Cycles
Finishing: Clear zinc plating, Yellow zinc plating,
 Black E-coating
Packing: 10 sets/carton (no screws)

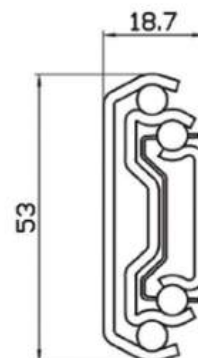

Installation dimensions

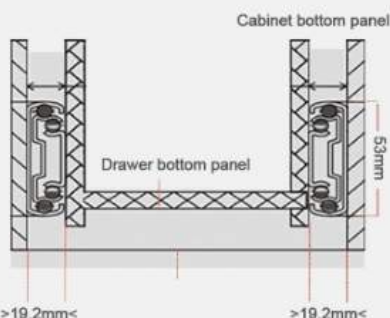

Product Model	SIZE	L	A	B	C	D	A'	B'	C'	H
1053-LILO	12"	300	192				192			300
	14"	350	224				256			350
	16"	400	288				588			400
	18"	450	192	320			96	320		450
	20"	500	224	384			128	384		500
	22"	550	256	416			160	416		550
	24"	600	288	480			160	480		600
	26"	650	288	512			192	384	512	650
	28"	700	320	576			224	416	576	700
	30"	750	192	384	608		224	448	608	750
	32"	800	192	384	544	672	224	480	672	800
	34"	850	192	416	576	732	224	512	736	850
	36"	900	192	448	608	768	224	512	768	900
	38"	950	192	480	640	832	224	576	832	950
	40"	1000	192	480	672	864	224	640	864	1000


MS600-HD1053



Through the internal recessed design and the high-intensity plastic coordination of the mid-rail, the order is pulled out during the drawer development process. To ensure the stability and safety of the drawer.




Installation dimensions

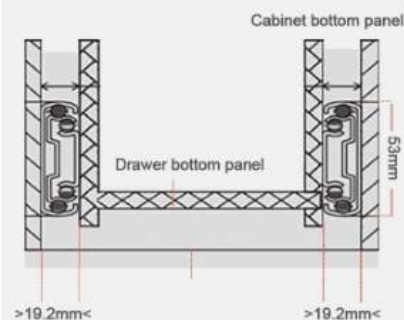


Specification

Length: 12" ~ 40" **Height:** 53mm
Slide Space: 18.7mm
Load: 100kgs
Finishing: Clear zinc plating, Yellow zinc plating, Black E-coating
Packing: 10 sets/carton (no screws)

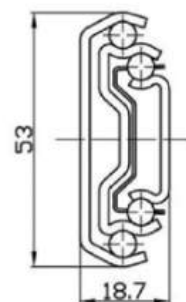

Product Model	SIZE	L	A	B	C	D	E	A'	B'	C'	H
1053-SN	14"	350	192					256			350
	16"	400	64	224				96	228		400
	18"	450	64	288				128	320		450
	20"	500	64	224	352			160	384		500
	22"	550	64	256	384			160	416		550
	24"	600	64	256	416			192	480		600
	26"	650	64	192	228	480		224	416	544	650


MS600-HD1855

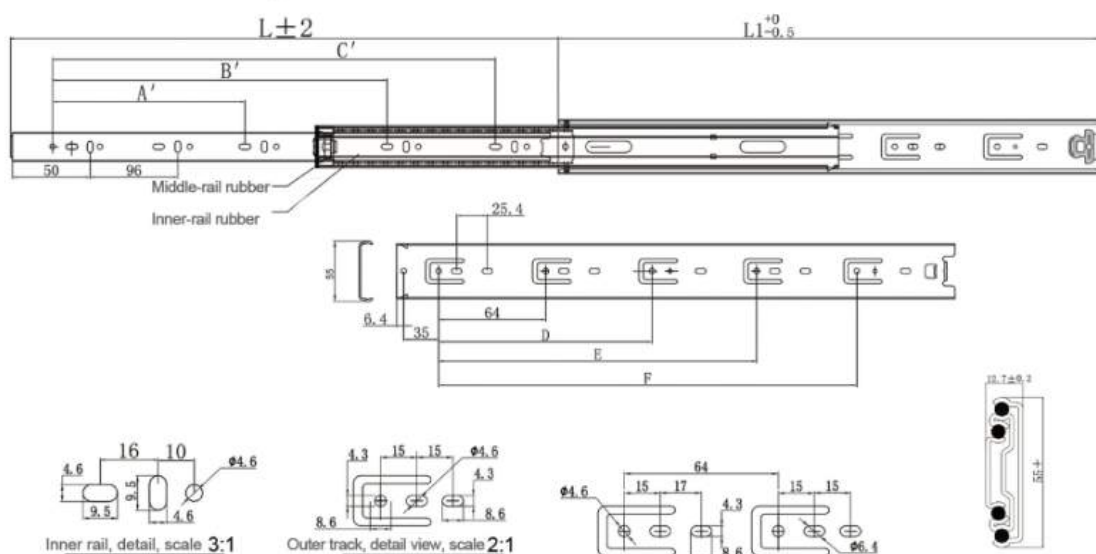

Push-to-release mechanism: a gentle press allows for easy separation, making drawer removal and installation simpler and safer.



Installation dimensions

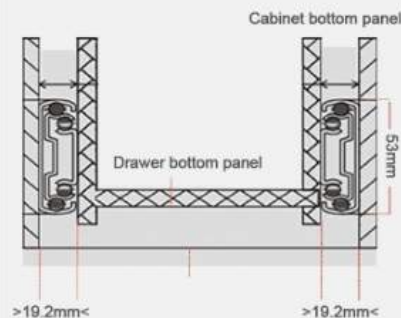

Specification

LENGTH : 10"-24"(250MM-600MM)
 INSTALLATION CLEARANCE: 12.7MM(+0.5MM-0)
 MAXIMUM LOAD: 90KG OPENING FORM: FULLY OPEN
 INSTALLATION FORM: SIDE SEPARATION METHOD: DETACHABLE
 SURFACE TREATMENT: BLUE ZINC, BLACK ZINC, ELECTROPHORESIS, ETC.
 MATERIAL : COLD ROLLED SHEET MATERIAL THICKNESS: 1.8 * 1.5 * 1.8MM.
 SCOPE: FILE CABINETS, CABINETS, LOCKERS, DISPLAY CABINETS,
 TOOL BOXES AND OTHER HIGH-LOAD WOODEN AND STEEL DRAWERS
 FEATURES: THE DRAWER AND THE CABINET WALL CAN BE INSTALLED SEPARATELY,
 AND THE DRAWER CAN BE REMOVED IT IS CONVENIENT FOR THE DRAWER TO RUN TO
 THE END AND HAS A LOCKING FUNCTION TO PREVENT THE DRAWER FROM SLIDING
 ON ITS OWN. DIFFERENT LENGTHS AND HOLE POSITIONS CAN BE CUSTOMIZED

Product Model	SIZE	标称长度	拉出长度	A	B	C	D	E	F
A1855	16"	400	400			304		160	288
	18"	450	400			352		224	352
	20"	500	400			411		256	384
	22"	550	400	176	352	448	192	320	448
	24"	600	400	176	352	496	192	352	480



Technical drawings of the 'S' type double-track railway track. The top part shows a side view of the track with a total length of $L=3$ and a section line A-B. Below this are two longitudinal sections: the first section shows a track with a width of 51 and section line A-B-C; the second section shows a track with a width of 49 and section line D-E-F. At the bottom, there are detailed views of the inner rail and outer track, both at a scale of 1:1. The inner rail detail shows a 90-degree angle and a width of 2.0. The outer track detail shows a 90-degree angle and a width of 2.0. To the right of these details is a cross-section of the track showing a width of 32 and a height of 4.6. At the bottom right, there is a side view of the track showing a width of 55 ± 0.5 and a height of 16 ± 0.5 .



Scope: File Cabinets, Cabinets, Lockers, Display Cabinets, Tool Boxes And Other High-load Wooden And Steel Drawers
Features: The Drawer And The Cabinet Wall Can Be Installed Separately, And The Drawer Can Be Removed It Is Convenient For The Drawer To Run To The End And Has A Locking Function To Prevent The Drawer From Sliding On Its Own. Different Lengths And Hole Positions Can Be Customized

Technical drawing of a drawer assembly showing the bottom panel and side panels. The drawing includes the following dimensions and labels:

- Drawer bottom panel**: Labeled in the center of the drawing.
- 55mm**: Dimension for the height of the side panels.
- >16mm<**: Dimension for the width of the side panels.

Product Model	SIZE	L	L1	A	B	C	D	E	F
A2055-16	8"	200	200	96			144		
	10"	250	200	128			160		
	12"	300	200	192			192		
	14"	350	200	224			224		
	16"	400	200	128	160		96	192	
	18"	450	200	160	160		128	192	
	20"	500	200	192	192		160	224	
	22"	550	200	192	224		192	224	
	24"	600	200	128	160	192	192	160	128
	26"	650	200	160	160	192	192	192	160
	28"	700	200	192	192	192	192	192	192
	30"	750	200	192	192	192	192	224	192
	32"	800	200	224	224	224	224	224	224
	34"	850	200	224	224	224	224	224	224
	36"	900	200	256	256	256	256	256	256
	38"	950	200	256	288	288	256	288	288
40"	1000	200	228	288	288	288	288	288	

MS600-HD2055-B





Countersunk mounting holes /
Double-row steel balls / Electrolytic
steel ball cage / Reinforced damper



Installation dimensions

Cabinet bottom panel

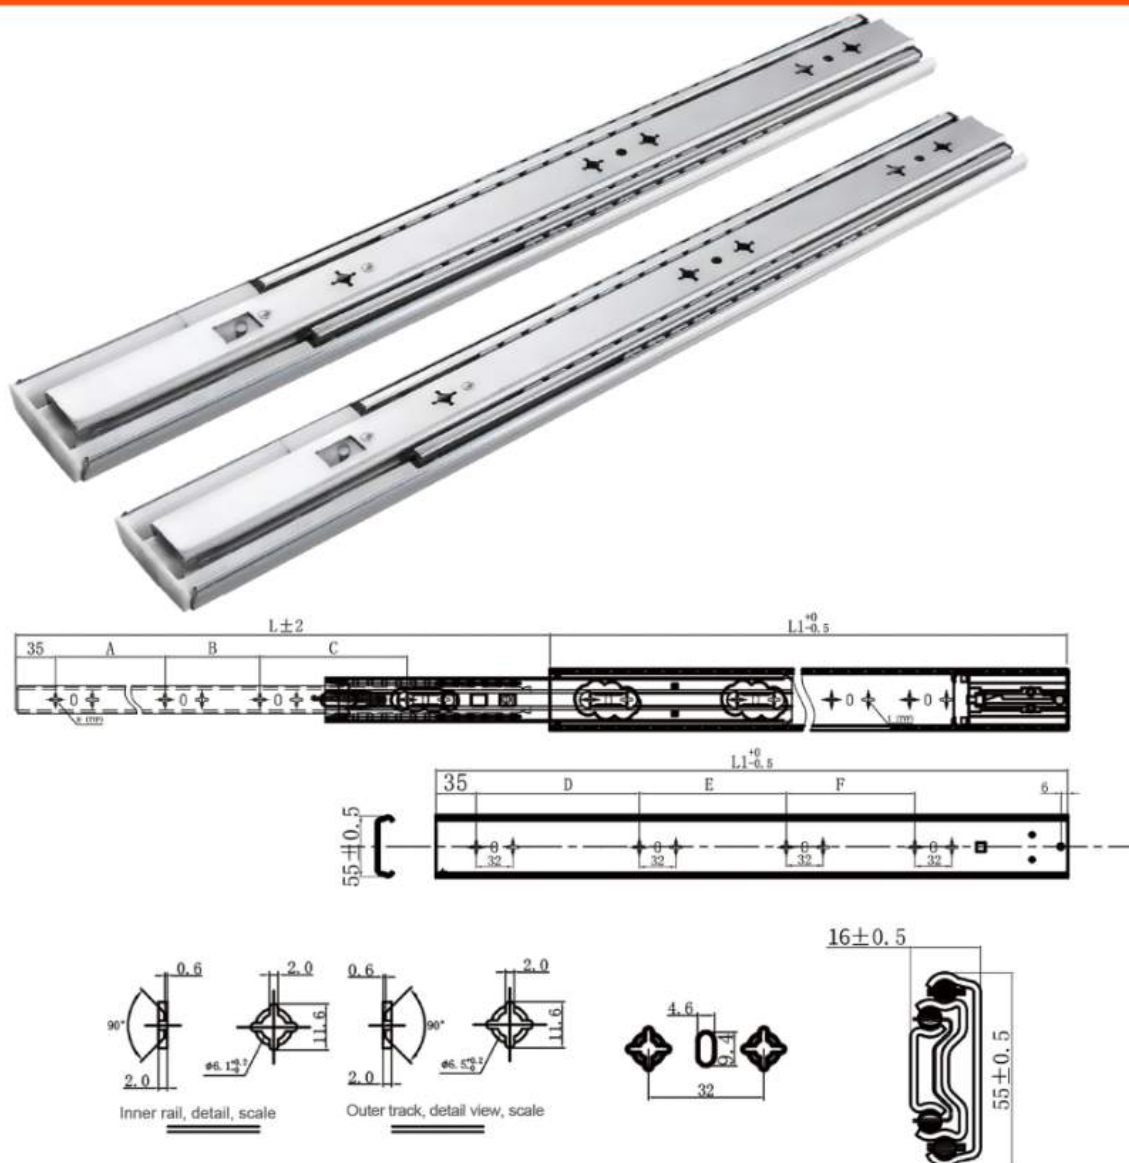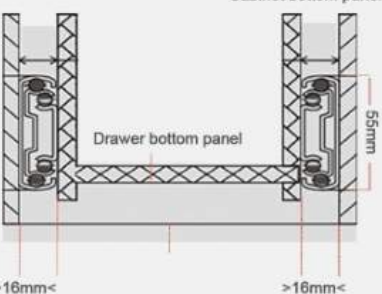

Specification


Length : 12"-32"(300mm-800mm)
Installation Clearance: 16mm(+0.5mm-0)
Maximum Load: 90kg Opening Form: Fully Open
Installation Form: Side Separation Method: Detachable
Surface Treatment: Blue Zinc, Black Zinc, Electrophoresis, Etc.
Material : Cold Rolled Sheet Material thickness: 2.0*1.8*2.0mm.
Scope: File Cabinets, Cabinets, Lockers, Display Cabinets,
Tool Boxes And Other High-load Wooden And Steel Drawers
Features: The Drawer And The Cabinet Wall Can Be Installed Separately,
And The Drawer Can Be Removed It Is Convenient For The Drawer To Run To
The End And Has A Locking Function To Prevent The Drawer From Sliding
On Its Own. Different Lengths And Hole Positions Can Be Customized

Product Model	SIZE	L	L1	A	B	C	D	E	F
B2055-16	12"	300	315	224			128		
	14"	350	365	128	128		160		
	16"	400	415	128	160		224		
	18"	450	465	160	160		156		
	20"	500	515	192	192		160	160	
	22"	550	565	192	224		192	160	
	24"	600	615	224	256		224	192	
	26"	650	665	256	256		256	224	
	28"	700	715	288	288		288	224	
	30"	750	765	224	224	192	192	192	160
	32"	800	815	224	256	192	192	192	192

MS600-HD2071-1




Double-row solid steel balls /
Detachable snap-fit mechanism

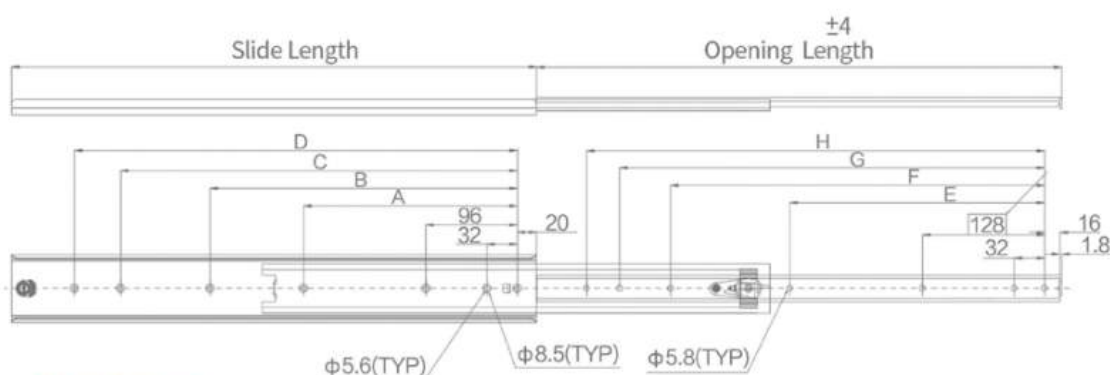


Specification

LENGTH: 10"-48(250MM-1200MM)
MOUNTING CLEARANCE: 18.5MM(+0.5MM-0)
MAX. LOAD: 125KG OPENING STYLE: FULLY OPEN
TYPE OF MOUNTING: SIDE MOUNTING DETACHABILITY: DETACHABLE
SURFACE TREATMENT: ZINC PLATING-BLUE, BLACK, ELECTROPHORESIS, ETC
MATERIAL: COLD-ROLLED STEEL MATERIAL THICKNESS: 2.0*2.0*2.0MM
SCOPE OF APPLICATION: FILE CABINETS, KITCHEN CABINETS,
STORAGE CABINETS, DISPLAY CABINETS, TOOL BOXES, AND OTHER
HIGH-LOAD WOODEN AND STEEL DRAWERS.
FEATURES: DRAWERS AND CABINET WALL CAN BE SEPARATELY MOUNTED,
THE DRAWERS ARE CONVENIENT TO REMOVE AND CAN BE LOCKED WHEN
TRAVELLING TO THE END TO PREVENT THE DRAWERS FROM SLIDING,
WITH CUSTOMIZED LENGTH AND MOUNTING HOLES, AND LENGTH
OF EXTENSION CAN BE INCREASED.

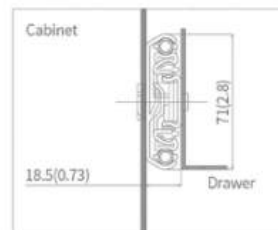

Installation dimensions

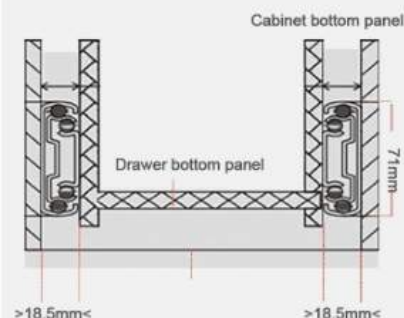


Product Model	SIZE	L	L1	荷重KG	A	B	C	D	E	F	G	H
A2071-01	10"	250	250	80	192				192			
	12"	300	250	90	160	224			192	256		
	14"	350	250	95	192	288			224	288		
	16"	400	250	100	192	320			256	352		
	18"	450	250	110	224	352			288	384		
	20"	500	250	120	224	384			192	320	448	
	22"	550	250	125	224	384	480		224	384	480	
	24"	600	250	125	224	384	512		224	384	512	
	26"	650	250	120	224	384	576		224	384	576	
	28"	700	250	115	256	416	608		256	416	608	640
	30"	750	250	110	256	448	672		288	448	672	704
	32"	800	250	105	288	480	704		288	480	704	736
	34"	850	250	100	288	512	768		320	512	768	800
	36"	900	250	95	320	576	832		320	576	768	832
	38"	950	250	90	320	576	864		320	576	864	896
	40"	1000	250	85	320	576	768	928	320	576	768	928
	42"	1050	250	80	320	576	768	960	320	608	768	992
	44"	1100	250	75	320	576	768	1024	320	608	768	1024
	46"	1150	250	70	320	576	832	1088	320	640	832	1088
	48"	1200	250	70	320	576	832	1120	320	640	896	1120

MS600-HD2076-C



Features a safety lock / Thickened steel construction with solid steel ball bearings.

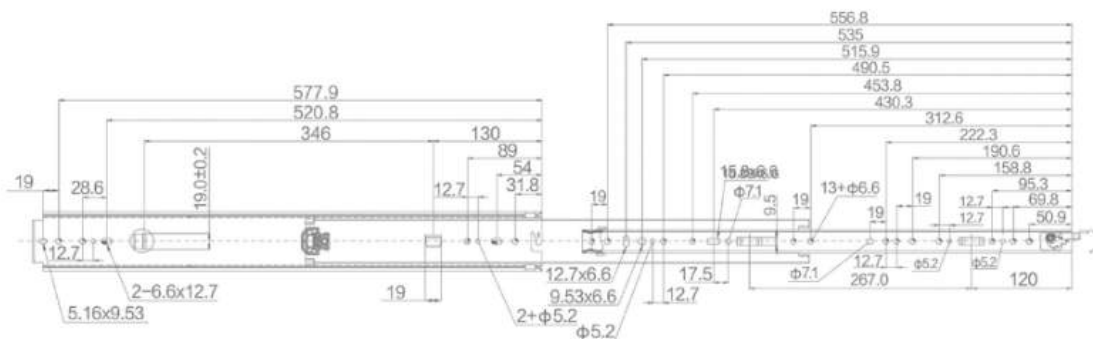

Specification

LENGTH: 10"-48" (250MM-1200MM)
 MOUNTING CLEARANCE: 18.5MM(+0.5MM-0)
 MAX. LOAD: 125KG OPENING STYLE: FULLY OPEN
 TYPE OF MOUNTING: SIDE MOUNTING DETACHABILITY: DETACHABLE
 SURFACE TREATMENT: ZINC PLATING-BLUE, BLACK, ELECTROPHORESIS, ETC
 MATERIAL: COLD-ROLLED STEEL MATERIAL THICKNESS: 2.0 * 2.0 * 2.0MM
 SCOPE OF APPLICATION: FILE CABINETS, KITCHEN CARBINETS,
 STORAGE CABINETS, DISPLAY CABINETS, TOOL BOXES, AND OTHER
 HIGH-LOAD WOODEN AND STEEL DRAWERS.
 FEATURES: DRAWERS AND CABINET WALL CAN BE SEPARATELY MOUNTED,
 THE DRAWERS ARE CONVENIENT TO REMOVE AND CAN BE LOCKED WHEN
 TRAVELLING TO THE END TO PREVENT THE DRAWERS FROM SLIDING,
 WITH CUSTOMIZED LENGTH AND MOUNTING HOLES, AND LENGTH
 OF EXTENSION CAN BE INCREASED.

DETAIL A
SCALE 2:1




Installation dimensions

Cabinet bottom panel


Drawer bottom panel

7mm

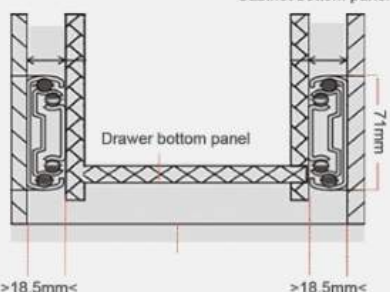


Product Model	SIZE	L	L1	荷重KG	A	B	C	D	E	F	G	H
C2071	10"	250	250	80	192				192			
	12"	300	250	90	160	224			192	256		
	14"	350	250	95	192	288			224	288		
	16"	400	250	100	192	320			256	352		
	18"	450	250	110	224	352			288	384		
	20"	500	250	120	224	384			192	320	448	
	22"	550	250	125	224	384	480		224	384	480	
	24"	600	250	125	224	384	512		224	384	512	
	26"	650	250	120	224	384	576		224	384	576	
	28"	700	250	115	256	416	608		256	416	608	640
	30"	750	250	110	256	448	672		288	448	672	704
	32"	800	250	105	288	480	704		288	480	704	736
	34"	850	250	100	288	512	768		320	512	768	800
	36"	900	250	95	320	576	832		320	576	768	832
	38"	950	250	90	320	576	864		320	576	864	896
	40"	1000	250	85	320	576	768	928	320	576	768	928
	42"	1050	250	80	320	576	768	960	320	608	768	992
	44"	1100	250	75	320	576	768	1024	320	608	768	1024
	46"	1150	250	70	320	576	832	1088	320	640	832	1088
	48"	1200	250	70	320	576	832	1120	320	640	896	1120

MS600-HD2576-A

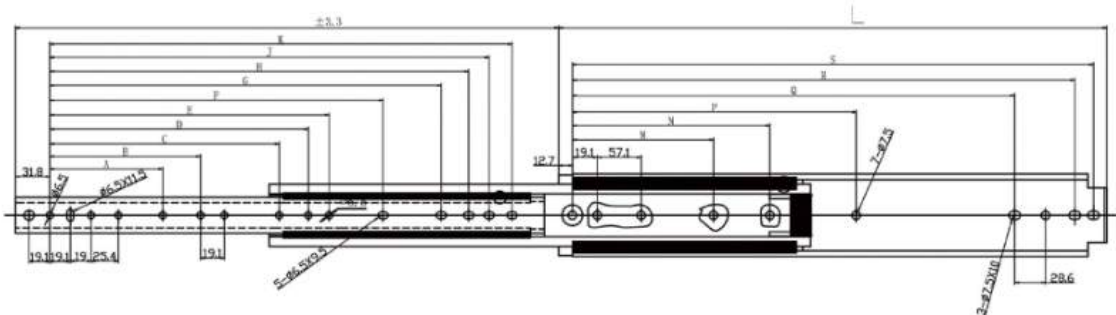

Specification

LENGTH : 10"-60"(254MM-1524MM)
 INSTALLATION CLEARANCE: 19.5MM(+2.5MM-0)
 MAXIMUM LOAD: 228KG OPENING FORM: FULLY OPEN
 INSTALLATION FORM: SIDE SEPARATION METHOD: DETACHABLE
 SURFACE TREATMENT: BLUE ZINC, BLACK ZINC, ELECTROPHORESIS, ETC.
 MATERIAL : COLD ROLLED SHEET
 MATERIAL THICKNESS: 2.5*2.2*2.5MM
 SCOPE: FILE CABINETS, CABINETS, LOCKERS, DISPLAY CABINETS,
 TOOL BOXES AND OTHER HIGH-LOAD WOODEN AND STEEL DRAWERS
 FEATURES: THE DRAWER AND THE CABINET WALL CAN BE INSTALLED
 SEPARATELY, AND THE DRAWER CAN BE REMOVED IT IS CONVENIENT
 FOR THE DRAWER TO RUN TO THE END AND HAS A LOCKING FUNCTION
 TO PREVENT THE DRAWER FROM SLIDING ON ITS OWN. DIFFERENT L
 ENNGTHS AND HOLE POSITIONS CAN BE CUSTOMIZED



Installation dimensions

Cabinet bottom panel

Drawer bottom panel

7mm

>18.5mm<


>18.5mm<

Product Model	SIZE	L	A	B	C	D	E	F	G	H	J	K	M	N	P	Q	R	S
A2576	10"	254							103.1	128.5	147.6	166.6				152.4	209.5	228.6
	12"	304.8							153.9	179.3	198.4	217.4				203.2	260.4	279.4
	14"	355.6							204.7	230.1	249.2	268.2				254	311.2	330.2
	16"	406.4	127						255.5	280.9	299.9	319				304.8	361.9	381
	18"	457.2	127						306.3	331.7	350.8	369.8				355.6	412.8	431.8
	20"	508	127	190.5				246.1	357.1	382.5	401.6	420.6				406.4	463.5	482.5
	22"	558.8	127	190.5				296.9	407.9	433.3	452.4	471.4				457.2	514.4	533.4
	24"	609.6	127	190.5				347.7	458.7	484.1	503.2	522.2				508	565.2	584.2
	26"	660.4	127	190.5				398.5	509.5	534.9	553.9	573				558.8	615.9	635
	28"	711.2	127	190.5				449.3	560.3	585.7	604.8	623.8				609.6	666.8	685.8
	30"	762	127	190.5	368.3			500.1	611.1	636.5	655.6	674.6	234.5		501.6	660.4	717.5	736.6
	32"	812.8	127	190.5	368.3			550.9	661.9	687.3	706.4	725.4	234.9	393.7	552.5	711.2	768.4	787.4
	34"	863.6	127	190.5	368.3	469.9		601.7	712.7	738.1	757.2	776.2	234.9	419.1	603.3	762	819.2	838.2
	36"	914.4	127	190.5	368.3	520.7		652.5	763.5	788.9	808	827	234.9	444.5	654.1	812.8	870	889
	38"	965.2	127	190.5	368.3	520.7		703.3	814.3	839.7	858.8	877.8	234.5	469.9	704.9	863.6	920.8	939.8
	40"	1016	127	190.5	368.3	520.7		754.1	865.1	890.5	909.6	928.6	234.9	495.3	735.7	894.4	951.6	970.6
	42"	1066.8	127	190.5	368.3	520.7	723.9	804.9	915.9	941.3	960.4	979.4	234.9	520.7	806.5	965.2	1022.4	1041.4
	44"	1117.6	127	190.5	368.3	520.7		855.7	966.7	992.1	1011.2	1030.2	234.9	546.1	857.3	1016	1073.2	1092.2
	46"	1168.4	127	190.5	368.3	520.7		906.5	1017.5	1042.9	1062	1081	234.9	571.5	908.1	1066.8	1124	1143
	48"	1219.2	127	190.5	368.3	520.7	825.5	957.3	1068.3	1093.7	1112.8	1131.8	234.5	596.9	958.8	1117.6	1174.8	1193.8
	50"	1270	127	190.5	368.3	520.7	825.5	1008.1	1119.1	1144.5	1163.6	1182.6	234.9	596.9	958.8	1117.6	1174.8	1193.8
	52"	1320.8	127	190.5	368.3	520.7	825.5	1058.9	1169.9	1195.3	1214.4	1233.4	234.9	596.9	958.8	1117.6	1174.8	1193.8
	54"	1371.6	127	190.5	368.3	520.7	825.5	1109.7	1220.7	1246.1	1265.2	1284.2	234.9	596.9	958.8	1117.6	1174.8	1193.8
	56"	1422.4	127	190.5	368.3	520.7	825.5	1160.5	1271.5	1296.9	1316	1335	234.9	596.9	958.8	1117.6	1174.8	1193.8
	58"	1473.2	127	190.5	368.3	520.7	825.5	1211.3	1322.3	1347.7	1366.8	1385.8	234.9	596.9	958.8	1117.6	1174.8	1193.8
	60"	1524	127	190.5	368.3	520.7	825.5	1262.1	1373.1	1398.5	1417.6	1436.6	234.5	596.9	958.8	1117.6	1174.8	1193.8

MS600-HD2576




Anti-rust technology / Inner-wall lubricant
/ Solid steel balls

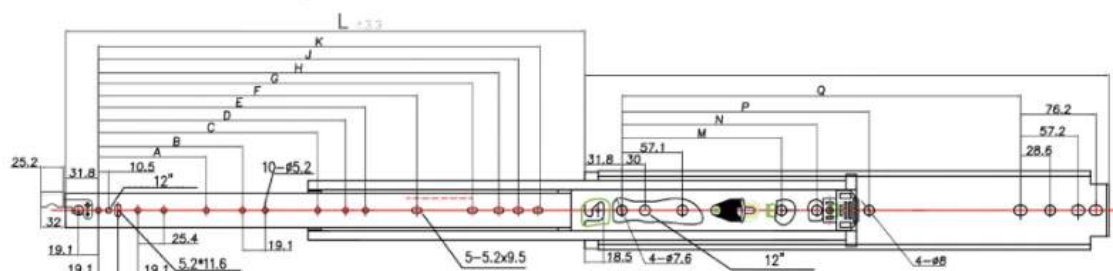

Specification

LENGTH: 12" - 60" (304.8MM-1524MM)
INSTALLATION CLEARANCE: 19.2MM(+2.5MM-0)
MAXIMUM LOAD: 228KG OPENING MODE: FULLY OPEN.
INSTALLATION MODE: SIDE SEPARATION MODE: DETACHABLE
SURFACE TREATMENT: PLATING BLUE ZINC, BLACK ZINC, ELECTROPHORESIS, ETC.
MATERIAL: COLD-ROLLED PLATE MATERIAL THICKNESS: 2.5*2.2*2.5MM
SCOPE: FILING CABINETS, CUPBOARDS, LOCKERS, DISPLAY CABINETS, TOOL BOXES AND OTHER
HEAVY WOODEN AND STEEL DRAWERS.
FEATURES: CAN NOT BE INSTALLED SEPARATELY.
IT IS CONVENIENT FOR THE DRAWER TO RUN TO THE END WITH LOCKING FUNCTION,
WHICH CAN PREVENT THE DRAWER FROM SLIDING BY ITSELF AND CAN CUSTOMIZE DIFFERENT
LENGTHS AND HOLE POSITIONS.

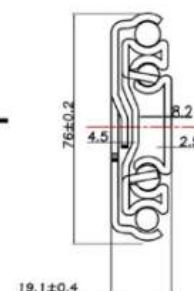

Installation dimensions

Cabinet bottom panel

Drawer bottom panel

76mm

>19.2mm<


>19.2mm<

Product Model	SIZE	L	A	B	C	D	E	F	G	H	J	K	M	N	P	Q	R	S
C2576	12"	304.8							153.9	179.3	198.4	217.4				203.2	260.4	279.4
	14"	355.6							204.7	230.1	249.2	268.2				254	311.2	330.2
	16"	406.4	127						255.5	280.9	299.9	319				304.8	361.9	381
	18"	457.2	127						246.1	306.3	331.7	350.8	369.8			355.6	412.8	431.8
	20"	508	127	190.5					296.9	357.1	382.5	401.6	420.6			406.4	463.5	482.6
	22"	558.8	127	190.5					347.7	407.9	433.3	452.4	471.4			457.2	514.4	533.4
	24"	609.6	127	190.5					398.5	458.7	484.1	503.2	522.2			508	565.2	584.2
	26"	660.4	127	190.5					449.3	509.5	534.9	553.9	573			558.8	615.9	635
	28"	711.2	127	190.5					500.1	560.3	585.7	604.8	623.8			609.6	666.8	685.8
	30"	762	127	190.5	368.3				550.9	611.1	636.5	655.6	674.6	234.9	501.6	660.4	717.6	736.6
	32"	812.8	127	190.5	368.3				601.7	661.9	687.3	706.4	725.4	234.9	552.5	711.2	768.4	787.4
	34"	863.6	127	190.5	368.3	469.9			652.5	712.7	738.1	757.2	776.2	234.9	603.3	762	819.2	838.2
	36"	914.4	127	190.5	368.3	520.7			703.3	763.5	788.9	808	827	234.9	654.1	812.8	870	889
	38"	965.2	127	190.5	368.3	520.7			754.1	814.3	839.7	858.8	877.8	234.9	704.9	863.6	920.8	939.8
	40"	1016	127	190.5	368.3	520.7			804.9	865.1	890.5	909.6	928.6	234.9	755.7	914.4	971.6	990.6
	42"	1066.8	127	190.5	368.3	520.7	723.9		855.7	915.9	941.3	960.4	979.4	234.9	806.5	965.2	1022.4	1041.4
	44"	1117.6	127	190.5	368.3	520.7			906.5	966.7	992.1	1011.2	1030.2	234.9	857.3	1016	1073.2	1092.2
	46"	1168.4	127	190.5	368.3	520.7			957.3	1017.5	1042.9	1062	1081	234.9	908.1	1066.8	1124	1143
	48"	1219.2	127	190.5	368.3	520.7	825.5	1008.1	1068.3	1093.7	1113.8	1133.8	1153.8	234.9	958.9	1117.6	1174.8	1193.8
	50"	1270	127	190.5	368.3	520.7	825.5	1058.9	1119.1	1144.5	1164.6	1184.6	1204.6	234.9	999.9	1158.6	1215.8	1234.8
	52"	1320.8	127	190.5	368.3	520.7	825.5	1109.7	1169.9	1195.3	1215.4	1235.4	1255.4	234.9	999.9	1158.6	1215.8	1234.8
	54"	1371.6	127	190.5	368.3	520.7	825.5	1160.5	1220.7	1246.1	1266.2	1286.2	1306.2	234.9	999.9	1158.6	1215.8	1234.8
	56"	1422.4	127	190.5	368.3	520.7	825.5	1211.3	1271.5	1296.9	1317	1337	1357	234.9	999.9	1158.6	1215.8	1234.8
	58"	1473.2	127	190.5	368.3	520.7	825.5	1262.1	1322.3	1347.7	1367.8	1387.8	1407.8	234.9	999.9	1158.6	1215.8	1234.8
	60"	1524	127	190.5	368.3	520.7	825.5	1312.9	1373.1	1398.5	1418.6	1438.6	1458.6	234.9	999.9	1158.6	1215.8	1234.8

MS600-HD1076-2




Anti-rust technology / Inner-wall lubricant
/ Solid steel balls

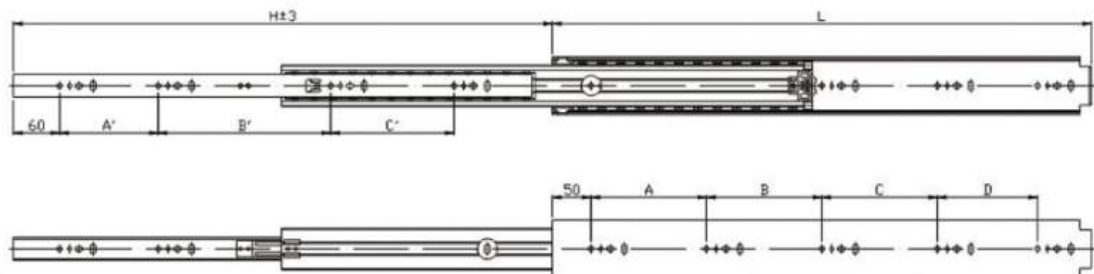


Specification

Length: 10" ~ 60"
Slide Space: 19.5mm
Load: 227kgs
Finishing: Clear zinc plating, Yellow zinc plating,
Black E-coating
Packing: 4 sets/carton (no screws)



Installation dimensions

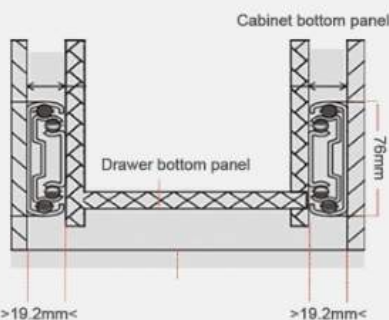


Product Model	SIZE	L	A	B	C	D	A'	B'	C'	H
1076-02	14"	350	192				192			350
	16"	400	224				224			400
	18"	450	192	128			256			450
	20"	500	224	160			288			500
	22"	550	256	160			352			550
	24"	600	256	192			288	128		600
	26"	650	128	192	192		320	160		650
	28"	700	160	192	192		128	224	160	700
	30"	750	160	224	224		160	256	160	750
	32"	800	192	224	224		160	256	192	800
	34"	850	192	256	224		160	320	192	850
	36"	900	192	288	224		160	352	192	900
	38"	950	192	288	256		160	352	256	950
	40"	1000	192	256	224	160	192	352	256	1000

MS600-HD1076



Anti-rust technology / Inner-wall lubricant
/ Solid steel balls

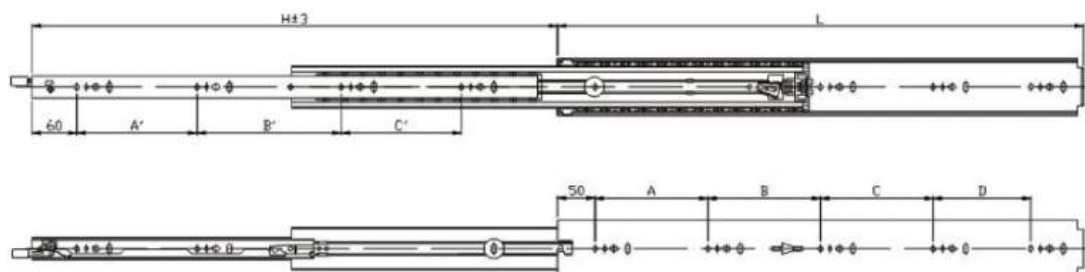

Specification

Length: 10" ~ 60"


Height: 75.1mm

Slide Space: 19.5mm

Load: 227kgs

Finishing: Clear zinc plating, Yellow zinc plating,
Black E-coating

Packing: 4 sets/carton (no screws)




Installation dimensions

Cabinet bottom panel

Drawer bottom panel

76mm

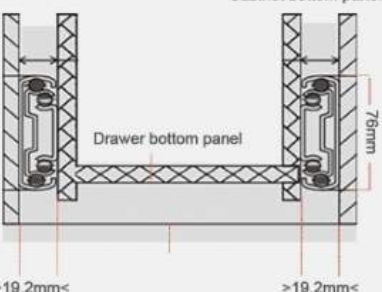

Product Model	SIZE	L	A	B	C	D	A'	B'	C'	H
1076-023S	14"	350	224				192			350
	16"	400	224				224			400
	18"	450	192	128			256			450
	20"	500	224	160			288			500
	22"	550	256	160			352			550
	24"	600	256	192			288	128		600
	26"	650	128	192	192		320	160		650
	28"	700	160	192	192		128	224	160	700
	30"	750	160	224	224		160	256	160	750
	32"	800	192	224	224		160	256	192	800
	34"	850	192	256	224		160	320	192	850
	36"	900	192	288	224		160	352	192	900
	38"	950	192	288	256		160	352	256	950
	40"	1000	192	256	224	160	192	352	256	1000

Aluminum Slides


Moisture-resistant, corrosion-resistant, and highly stable.

MS600-AL200701



Specification

- Length: 2"-22" (200mm-550mm)
 - Mounting clearance: 8 mm (+0.5mm-0)
 - Type of mounting: side mounting
 - Max. Load: 20 kg
 - Surface treatment: anodize
- Material: AL 6063

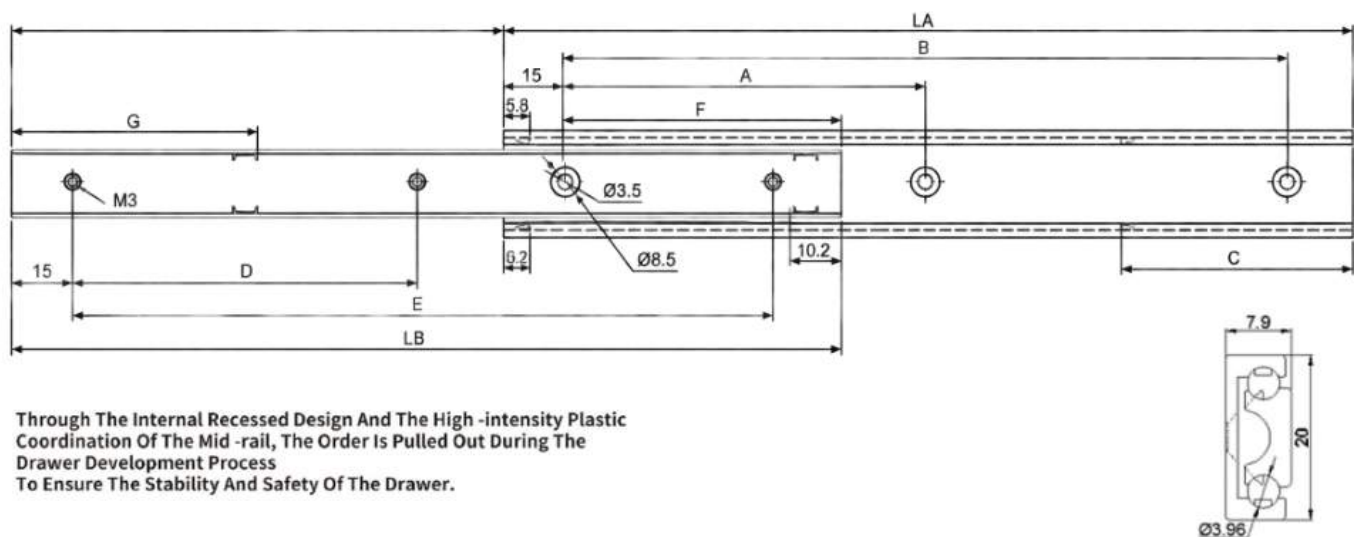

Through The Internal Recessed Design And The High -intensity Plastic Coordination Of The Mid -rail, The Order Is Pulled Out During The Drawer Development Process To Ensure The Stability And Safety Of The Drawer.


Product Model	Slide Length	Opening Length	Hole spacing(mm)			
			A	B	D	E
HZF-AL200801	100(4")	60	70		70	
	150 (6")	90	120		120	
	200(8")	120	85	170	85	170
	250(10")	150	110	220	110	220
	300(12")	180	135	270	135	270
	350(14")	210	160	320	160	320
	400(16")	240	185	370	185	370
	450(18")	270	210	420	210	420
	500(20")	300	235	470	235	470
	550(22")	330	260	520	260	520
	600(24")	360	285	570	285	570

MS600-AL200802




Specification

- Length: 2"-22" (200mm-550mm)
- Mounting clearance: 16 mm (+0.5mm-0)
- Type of mounting: side mounting
- Max. Load: 20 kg
- Surface treatment: anodize
- Material: AL 6063

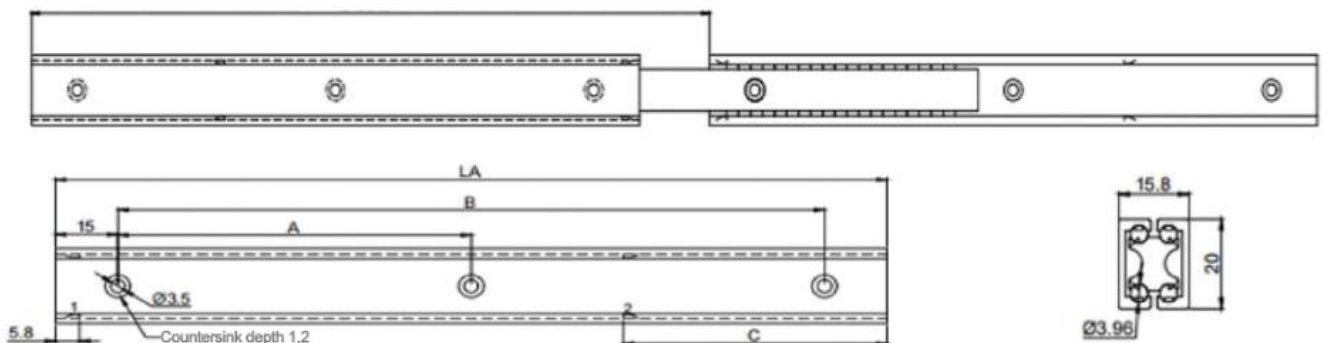

Through The Internal Recessed Design And The High -intensity Plastic Coordination Of The Mid -rail, The Order Is Pulled Out During The Drawer Development Process To Ensure The Stability And Safety Of The Drawer.

Installation Diagram

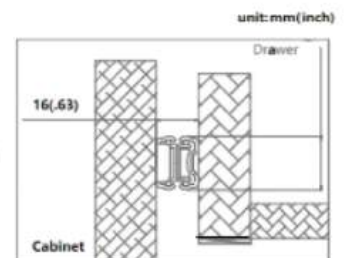


Product Model	Slide Length	Opening Length	Hole spacing(mm)	
			A	B
HZF-AL200802	100(4")	100	70	
	150 (6")	157	120	
	200(8")	223	85	170
	250(10")	273	110	220
	300(12")	345	135	270
	350(14")	404	160	320
	400(16")	425	185	370
	450(18")	525	210	420
	500(20")	535	235	470

MS600-AL1606




Specification

- Length: 2"-6" (200mm-550mm)
- Mounting clearance: 6 mm (+0.5mm-0)
- Type of mounting: side mounting
- Max. Load: 5 kg
- Surface treatment: anodize
- Material: AL 6082

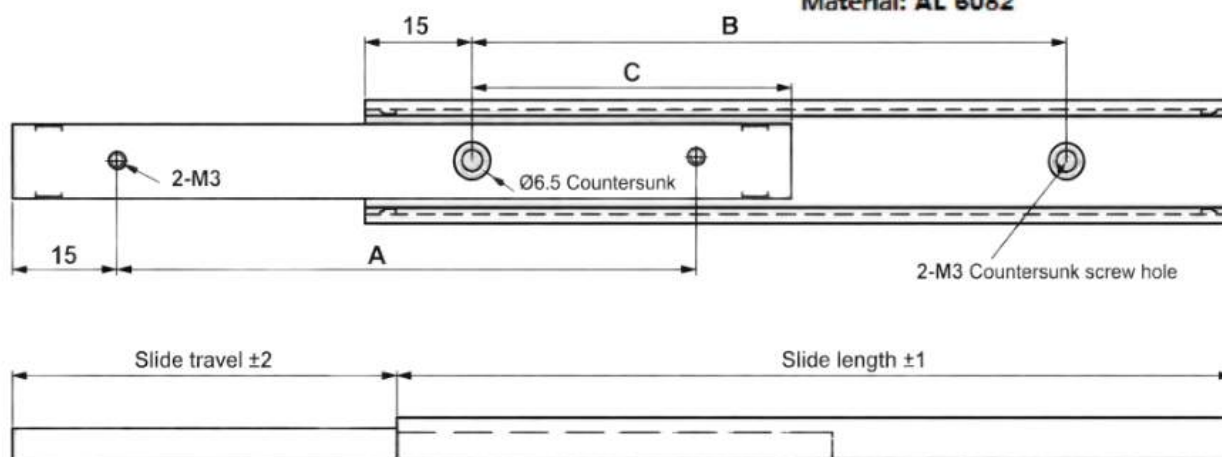

Through The Internal Recessed Design And The High -intensity Plastic Coordination Of The Mid -rail, The Order Is Pulled Out During The Drawer Development Process To Ensure The Stability And Safety Of The Drawer.

Installation Diagram





Product Model		Slide Travel	A (mm)	B (mm)	c (mm)	Load Capacity/pari	Weight (kg/Pcs)
No.	Slide Length						
HZF-AL1606	60	30	30	30	25	5.1kgf	0.02
	70	40	40	40			0.03
	90	50	60	60			0.04
	100	60	70	70			0.05

MS600-AL3517



Specification

- Length: 10"-60" (250mm-1500mm)
- Mounting clearance: 13/17/22 mm (+0.5mm-0)
- Type of mounting: side mounting
- Max. Load: 20 kg
- Surface treatment: anodize
- Material: Steel / AL 7005

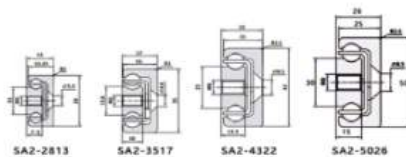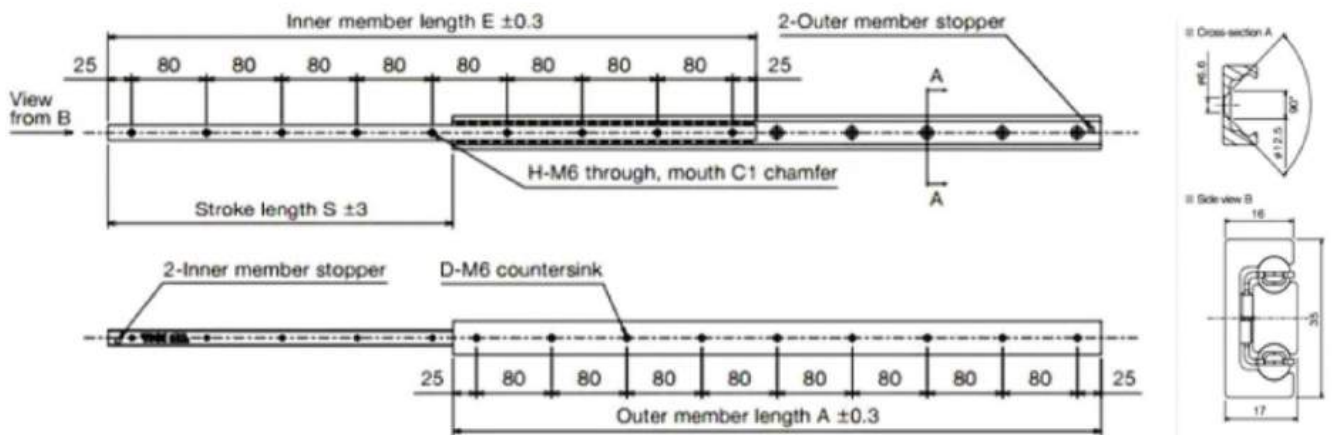

Installation Diagram


Model	Stroke Length S	Length A	Inner rail length	Mounting hole		Permissible Load N/set	Weight kg/set
				D	H		
A3517-210L	128.7	210	210	3	3	5,150	1.33
A3517-290L	157.9	290	290	4	4	7,990	1.87
A3517-370L	199.8	370	370	5	5	8,610	2.40
A3517-450L	254.4	450	450	6	6	7,970	2.90
A3517-530L	283.6	530	530	7	7	9,320	3.44
A3517-610L	325.5	610	610	8	8	9,540	3.97
A3517-690L	367.4	690	690	9	9	9,740	4.50

MS600-AL7046/9046



Specification


- Length: 10"-60" (250mm-1500mm)
- Mounting clearance: 27 mm (+0.5mm-0)
- Type of mounting: side mounting
- Max. Load: 20 kg
- Surface treatment: anodize
- Material: AL+ Steel 7075+sus430.

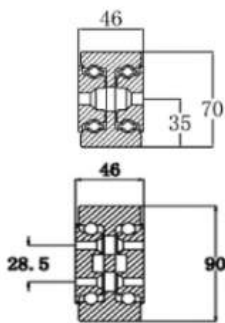

Installation Diagram

±4 Opening Length

Slide Length (mm)	Slide Travel (mm)	Load Capacity /pair(kg)	Weight kg/set
500	500	1000	9.0
550	550	975	9.9
600	600	950	10.8
650	650	925	11.7
700	700	900	12.6
750	750	875	13.5
800	800	850	14.4
900	900	800	16.2
1000	1000	750	18
1100	1100	700	19.8
1200	1200	650	21.6
1300	1300	600	23.4
1400	1400	550	25.2
1500	1500	500	27.0
1600	1600	450	28.8
1700	1700	400	30.6
1800	1800	350	32.4
2000	2000	250	36.0

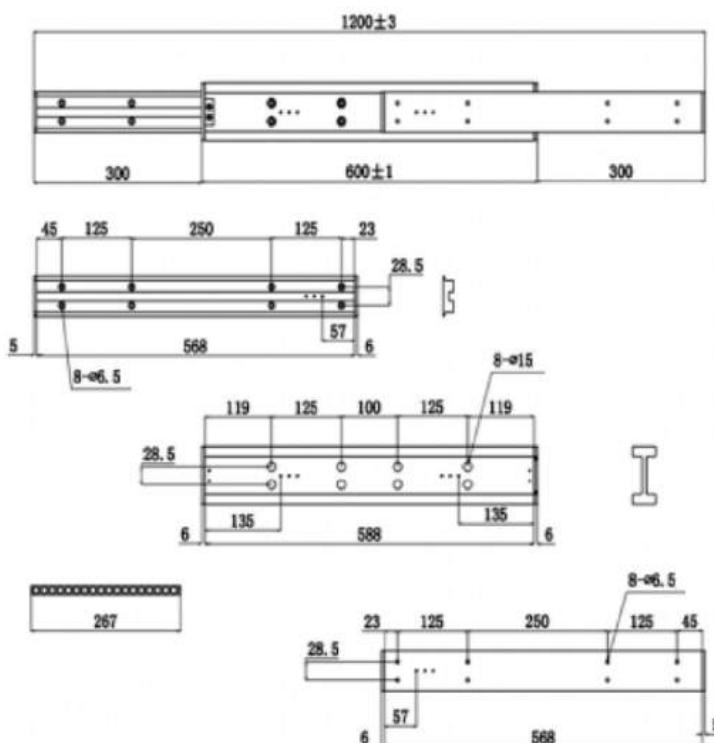


MS600-AL8027




Specification

- Length: 10"-60" (250mm-1500mm)
 - Mounting clearance: 27 mm (+0.5mm-0)
 - Type of mounting: side mounting
 - Max. Load: 20 kg
 - Surface treatment: anodize
- Material: AL 7075

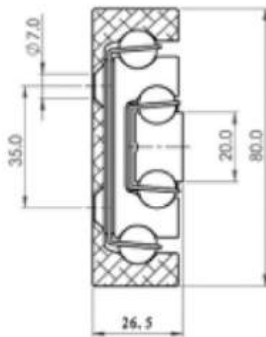

Installation Diagram

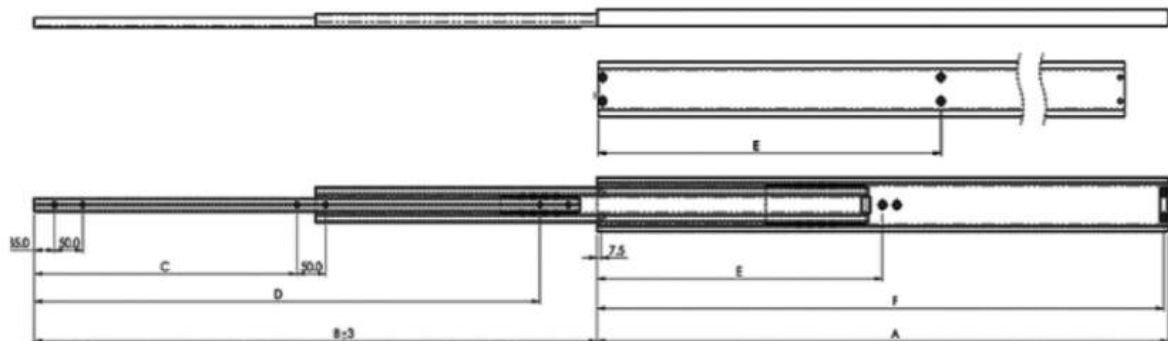

Part Number	Installation Length "A"	Extension Length "B"	Load Per Pair (kg)	Drill Table			
				"C"	"D"	"E"	"F"
HZF8027. 0300	300	285	250		185	150	292.5
HZF8027. 0350	350	335	260		235	175	342.5
HZF8027. 0400	400	385	270		285	200	392.5
HZF8027. 0450	450	435	280		335	225	442.5
HZF8027. 0500	500	485	300		385	250	492.5
HZF8027. 0550	550	535	320	235	435	275	542.5
HZF8027. 0600	600	585	330	260	485	300	592.5
HZF8027. 0650	650	635	315	285	535	325	642.5
HZF8027. 0700	700	685	300	310	585	350	692.5
HZF8027. 0750	750	735	290	335	635	375	742.5
HZF8027. 0800	800	785	280	360	685	400	792.5
HZF8027. 0850	850	835	270	385	735	425	842.5
HZF8027. 0900	900	885	260	410	785	450	892.5
HZF8027. 0950	950	935	250	435	835	475	942.5
HZF8027. 1000	1000	985	240	460	885	500	992.5
HZF8027. 1200	1200	1185	200	560	1085	600	1192.5
HZF8027. 1500	1500	1485	130	710	1385	750	1492.5


Stainless Steel Slides

Suitable for humid, high-temperature, and corrosive environments.

MS600-S2053-304




Anti-rust technology / Inner-wall lubricant / Solid steel balls

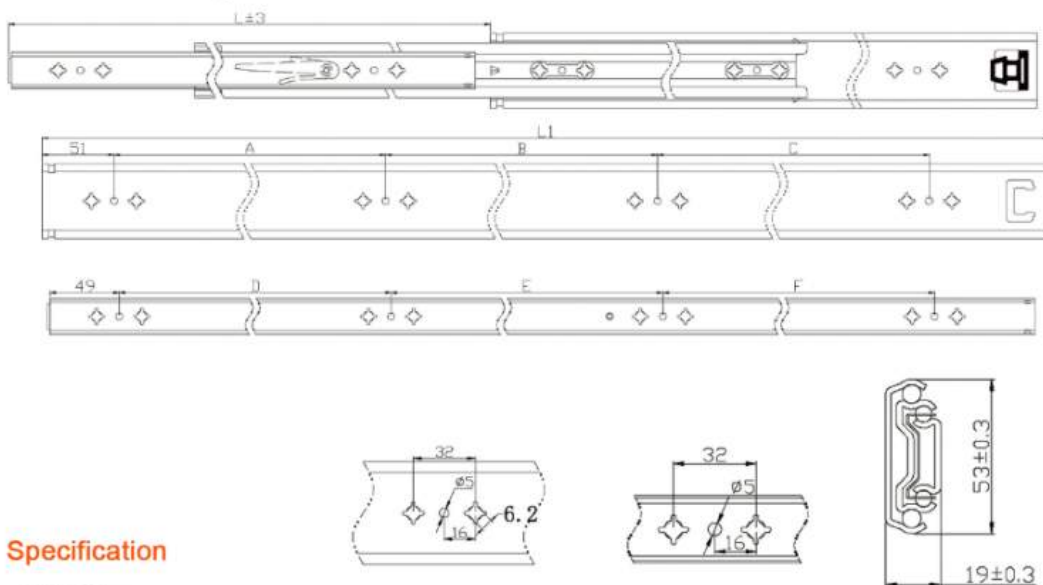

Specification

Height: 53.3mm;
 Material: Q235 High-strength Cold-rolled Strip Steel;
 Dynamic Load Bearing: 115kg/18 Inch;
 Installation Method: Side Installation;
 Surface Treatment: Blue-white Zinc;
 Even Metric Length Is 8 Inches (200mm)~80 Inches (2000mm);
 Features: 1. Full Extraction And Heavy Load;
 2. Detachable Installation Function;
 Application: Suitable For Home, Electrical Appliances,
 Tool Cabinets And Other Large And Heavy Drawers.
 Material thickness: 2.0 * 2.0*2.0*2.0MM

Installation dimensions

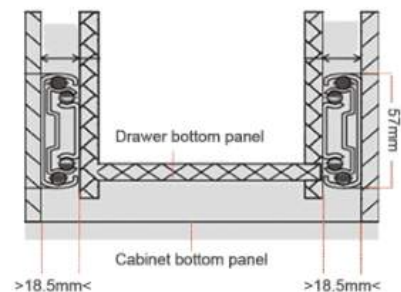

Product Model	SIZE	L	L1	A	B	C	D	E	F
A2053-304	8"	200	200	96			144		
	10"	250	250	128			160		
	12"	300	300	192			192		
	14"	350	350	224			224		
	16"	400	400	128	160		96	192	
	18"	450	450	160	160		128	192	
	20"	500	500	192	192		160	224	
	22"	550	550	192	224		192	224	
	24"	600	600	128	160	192	192	160	128
	26"	650	650	160	160	192	192	192	160
	28"	700	700	192	192	192	192	192	192
	30"	750	750	192	192	192	192	224	192
	32"	800	800	224	224	224	224	224	224
	34"	850	850	224	224	224	224	224	224
	36"	900	900	256	256	256	256	256	256
	38"	950	950	256	288	288	256	288	288
	40"	1000	1000	288	288	288	288	288	288

MS600-S4510F




Recommended applications: mid-duty dishware disinfecter, cupboard, etc., suitable for damp, hot and corrosive environment, never get rusty, or for any applications requiring 40kg load or less and requiring full extension.

Product features: fine adjustment of gap is possible when installing, quick separation mechanism, vibration prevention ball strip for absorbing impulsive force, and mechanism to prevent drawer from springing out.

Installation method: side installation. 12.8 +0.2/-0 mm

Finishing: sanded, polished.

Material: SUS201, SUS304 stainless steel.

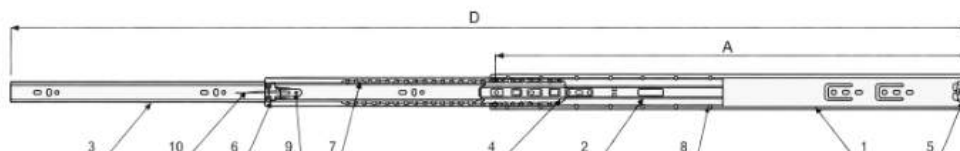

No.	Name	Size	Material	Qty	Remark
1	Outer rail		SUS201/304 stainless steel	1	According to order requirements
2	Middle rail		SUS201/304 stainless steel	1	According to order requirements
3	Inner rail		SUS201/304 stainless steel	1	According to order requirements
4	Ball	0.5	SUS201/304 stainless steel	1	According to order requirements
5	Molding piece (M type)	32.7x22.8x9.2	POM/PA	1	
6	Steel ball	Φ4.76	Steel		According to standard
7	Ball retainer strip		PP	2	According to standard
8	Rivet	3.2x5	Aluminum	1	
9	Small fish piece	63.2x19.4x3.1	POM/PA	1	
10	Stopper				

SIZE	A	D	Add-on length (mm)	Number of balls
250	250		110	3 sections
300	300		150	4 sections
350	350	670	175	5 sections
400	400	770	200	6 sections
450	450	870	225	7 sections
500	500	970	250	8 sections
550	550	1070	275	9 sections
600	600	1170	150x2	10 sections

MS600-S4510H




Recommended applications: mid-duty dishware disinfecter, cupboard, etc., suitable for damp, hot and corrosive environment, never get rusty, or for any applications requiring 40kg load or less and requiring full extension.

Product features: fine adjustment of gap is possible when installing, quick separation mechanism, vibration prevention ball strip for absorbing impulsive force, and mechanism to prevent drawer from springing out.

Installation method: side installation. 12.8 +0.2/-0 mm

Finishing: sanded, polished.


Material: SUS201, SUS304 stainless steel.

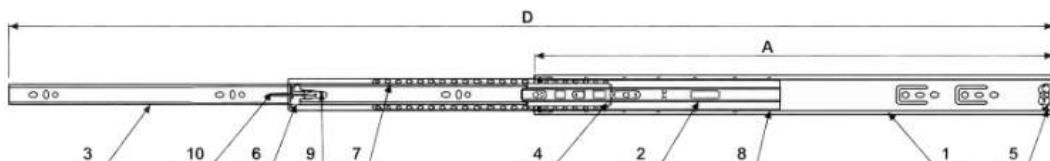


No.	Name	Size	Material	Qty	Remark
1	Outer rail		SUS201/304 stainless steel	1	According to order requirements
2	Middle rail		SUS201/304 stainless steel	1	According to order requirements
3	Inner rail		SUS201/304 stainless steel	1	According to order requirements
4	Ball	0.5	SUS201/304 stainless steel	1	According to order requirements
5	Molding piece (M type)	32.7x22.8x9.2	POM/PA	1	
6	Steel ball	Φ4.76	Steel		According to standard
7	Ball retainer strip		PP	2	According to standard
8	Rivet	3.2x5	Aluminum	1	
9	Small fish piece	63.2x19.4x3.1	POM/PA	1	
10	Stopper				

SIZE	A	D	Add-on length (mm)	Number of balls (sections)
250	250		110	3
300	300		150	4
350	350	675	175	5
400	400	775	200	6
450	450	875	225	7
500	500	975	250	8
550	550	1075	275	9
600	600	1175	150x2	10

MS600-S4510



Thickness Range	
NO.	Wood thickness
①	1.0mm
②	1.0mm
③	1.0mm

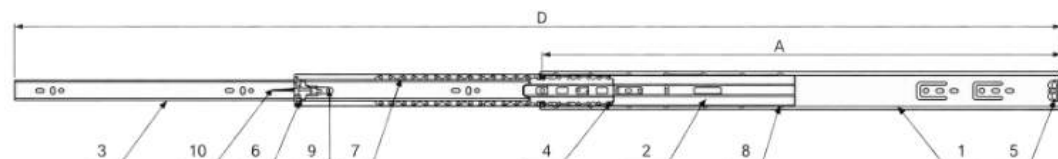


No.	Name	Size	Material	Qty	Remark
1	Outer rail		SUS201/304 stainless steel	1	According to order requirements
2	Middle rail		SUS201/304 stainless steel	1	According to order requirements
3	Inner rail		SUS201/304 stainless steel	1	According to order requirements
4	Ball	0.5	SUS201/304 stainless steel	1	According to order requirements
5	Molding piece (M type)	32.7x22.8x9.2	POM/PA	1	
6	Steel ball	φ 4.76	STEEL		According to standard
7	Ball retainer strip		PP	2	According to standard
8	Rivet	3.2x5	ALUMINA	1	
9	Small fish piece	63.2x19.4x3.1	POM/PA	1	
10	Stopper				


SIZE	A	D	Add-on length (mm)	Number of balls (sections)
250	250	502	110	3
300	300	602	150	4
350	350	702	175	5
400	400	802	200	6
450	450	902	225	7
500	500	1002	250	8
550	550	1102	275	9
600	600	1202	150x2	10



MS600-S4512



Thickness Range		
NO.	Wood thickness	
①	4512	4512A
②	1.2mm	1.0mm
③	1.2mm	1.0mm
④	1.2mm	1.2mm

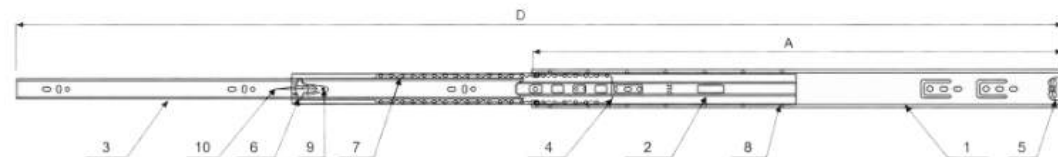

No.	Name	Size	Material	Qty	Remark
1	Outer rail		SUS201/304 stainless steel	1	According to order requirements
2	Middle rail		SUS201/304 stainless steel	1	According to order requirements
3	Inner rail		SUS201/304 stainless steel	1	According to order requirements
4	Ball	0.5	SUS201/304 stainless steel	1	According to order requirements
5	Molding piece (M type)	32.7x22.8x9.2	POM/PA	1	
6	Steel ball	φ 4.76	STEEL		According to standard
7	Ball retainer strip		PP	2	According to standard
8	Rivet	3.2x5	ALUMINA	1	
9	Small fish piece	63.2x19.4x3.1	POM/PA	1	

SIZE	A	D	Add-on length (mm)	Number of balls (sections)
250	250	502	110	3
300	300	602	150	4
350	350	702	175	5
400	400	802	200	6
450	450	902	225	7
500	500	1002	250	8
550	550	1102	275	9
600	600	1202	150x2	10



MS600-S3810



Thickness Range

NO.	Wood thickness
①	1.0mm
②	1.0mm
③	1.0mm




Recommended applications: mid-duty dishware disinfector, cupboard, etc., suitable for damp, hot and corrosive environment, never get rusty, or for any applications requiring 35kg load or less and requiring full extension.

Product features: fine adjustment of gap is possible when installing, quick separation mechanism, vibration prevention ball strip for absorbing impulsive force, and mechanism to prevent drawer from springing out.

Installation method: side installation. 12.8 +0.2/-0 mm

Finishing: sanded, polished.

Material: SUS201, SUS304 stainless steel.

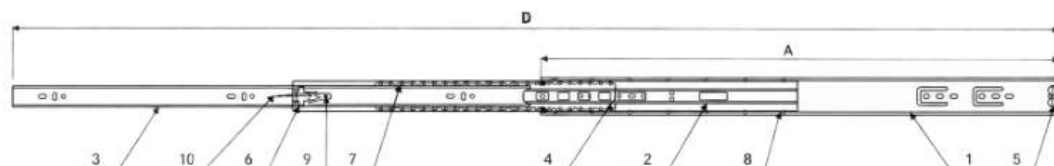

No.	Name	Size	Material	Qty	Remark
1	Outer rail		SUS201/304 stainless steel	1	According to order requirements
2	Middle rail		SUS201/304 stainless steel	1	According to order requirements
3	Inner rail		SUS201/304 stainless steel	1	According to order requirements
4	Ball	0.5	SUS201/304 stainless steel	1	According to order requirements
5	Molding piece (M type)	32.7x22.8x9.2	POM/PA	1	
6	Steel ball	φ 4.75	STEEL		According to standard
7	Ball retainer strip		PP	2	According to standard
8	Rivet	3.2x5	ALUMINA	1	
9	Small fish piece	63.2x19.4x3.1	POM/PA	1	

SIZE	A	D	Add-on length (mm)	Number of balls (sections)
250	250	502	110	3
300	300	602	150	4
350	350	702	175	5
400	400	802	200	6
450	450	902	225	7
500	500	1002	250	8
550	550	1102	275	9
600	600	1202	150x2	10

MS600-S3810G



Thickness Range

NO.	Wood thickness
①	1.0mm
②	1.0mm
③	1.0mm




Recommended applications: mid-duty dishware disinfector, cupboard, etc., suitable for damp, hot and corrosive environment, never get rusty, or for any applications requiring 35kg load or less and requiring full extension.

Product features: fine adjustment of gap is possible when installing, quick separation mechanism, vibration prevention ball strip for absorbing impulsive force, and mechanism to prevent drawer from springing out.

Installation method: side installation. 12.8 +0.2/-0 mm

Finishing: sanded, polished.


Material: SUS201, SUS304 stainless steel.

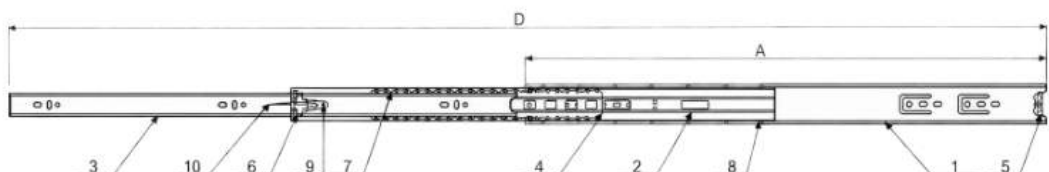

No.	Name	Size	Material	Qty	Remark
1	Outer rail		SUS201/304 stainless steel	1	According to order requirements
2	Middle rail		SUS201/304 stainless steel	1	According to order requirements
3	Inner rail		SUS201/304 stainless steel	1	According to order requirements
4	Ball	0.5	SUS201/304 stainless steel	1	According to order requirements
5	Molding piece (M type)	32.7x22.8x9.2	POM/PA	1	
6	Steel ball	φ 4.75	STEEL		According to standard
7	Ball retainer strip		PP	2	According to standard
8	Rivet	3.2x5	ALUMINA	1	
9	Small fish piece	63.2x19.4x3.1	POM/PA	1	

SIZE	A	D	Add-on length (mm)	Number of balls (sections)
250	250	502	110	3
300	300	602	150	4
350	350	702	175	5
400	400	802	200	6
450	450	902	225	7
500	500	1002	250	8
550	550	1102	275	9
600	600	1202	150x2	10

MS600-S3510

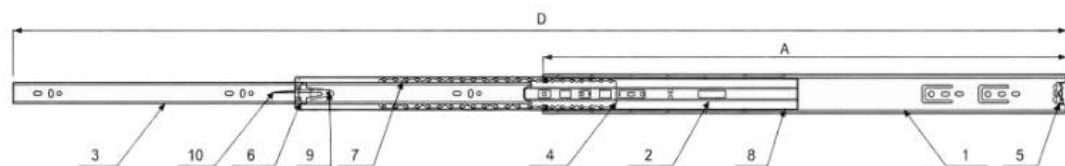

No.	Name	Size	Material	Qty	Remark
1	Outer rail		SUS201/304 stainless steel	1	According to order requirements
2	Middle rail		SUS201/304 stainless steel	1	According to order requirements
3	Inner rail		SUS201/304 stainless steel	1	According to order requirements
4	Ball	0.5	SUS201/304 stainless steel	1	According to order requirements
5	Molding piece (M type)	32.7x22.8x9.2	POM/PA	1	
6	Steel ball	Φ 4.76	STEEL		According to standard
7	Ball retainer strip		PP	2	According to standard
8	Rivet	3.2x5	ALUMINA	1	
9	Small fish piece	63.2x19.4x3.1	POM/PA	1	


SIZE	A	D	Add-on length (mm)	Number of balls (sections)
250	250	502	110	3
300	300	602	150	4
350	350	702	175	5
400	400	802	200	6
450	450	902	225	7
500	500	1002	250	8
550	550	1102	275	9
600	600	1202	150x2	10



MS600-S3710




According to customer's requirement custom

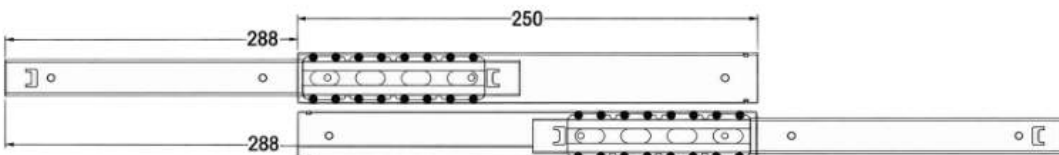


No.	Name	Size	Material	Qty	Remark
1	Outer rail		SUS201/304 stainless steel	1	According to order requirements
2	Inner rail		SUS201/304 stainless steel	1	According to order requirements
3	Ball	0.5	SUS201/304 stainless steel	1	According to order requirements




Installation indication

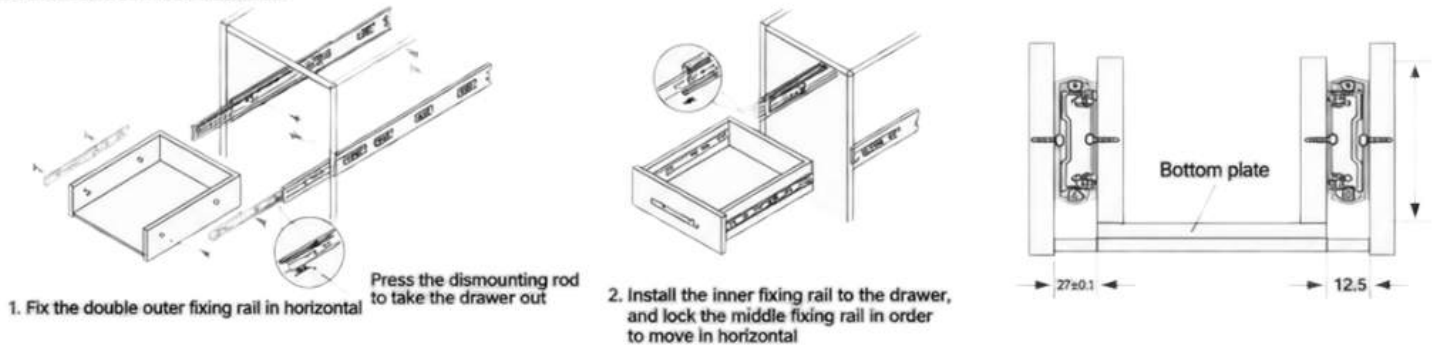


Installation method

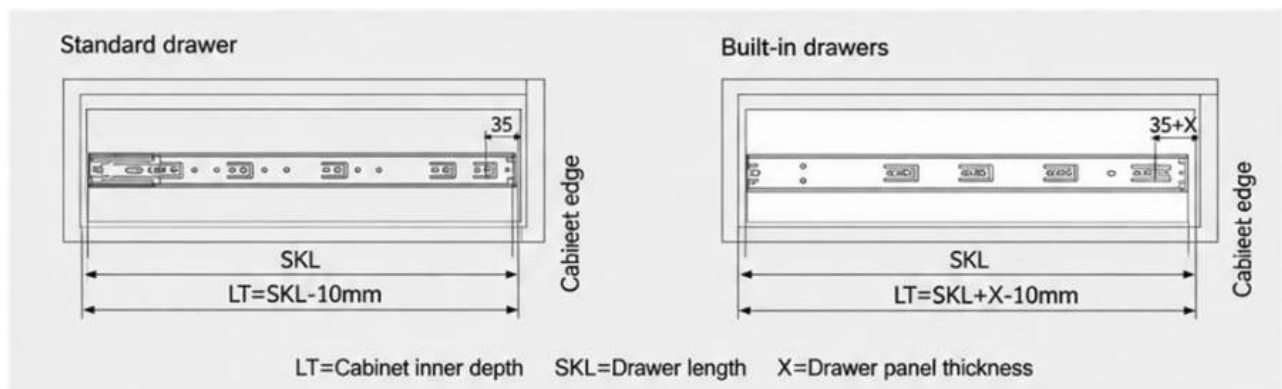

Installation instructions

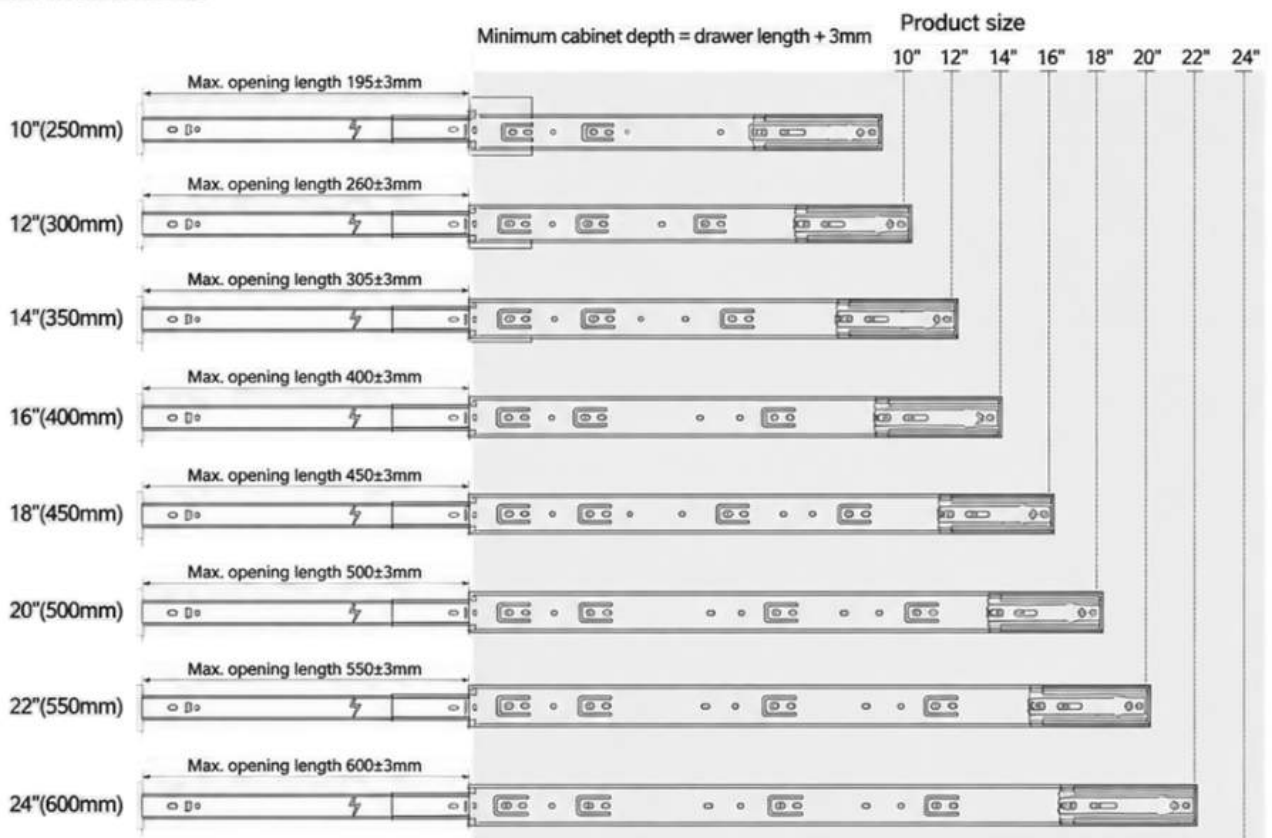


Installation indication of stainless steel ball bearing slide

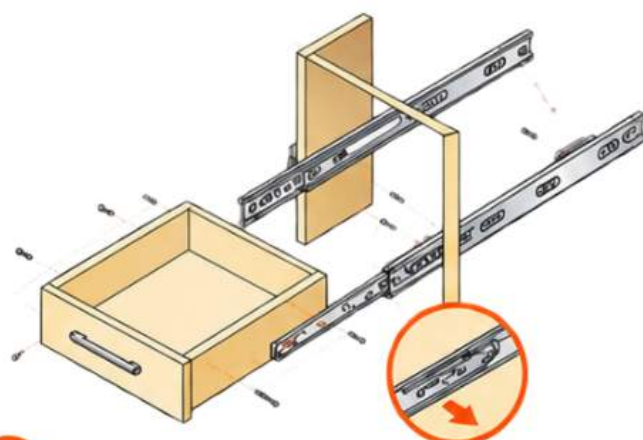


1 Fix the outer rail horizontally onto the side of the cabinet.

To remove the drawer, please press the disengaging rod.

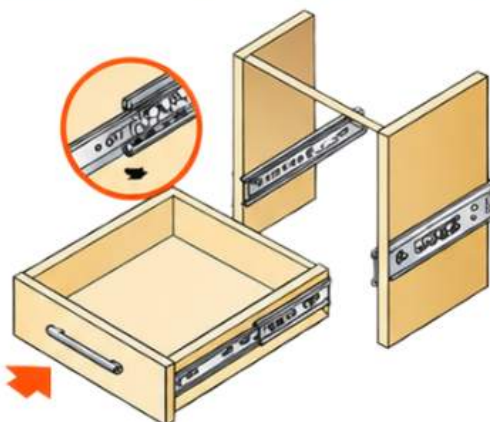

2 Install the inner fixing rail to the drawer, then lock the middle fixing rail, and push the drawer in horizontally.


Drawer with three linked ball bearing slides

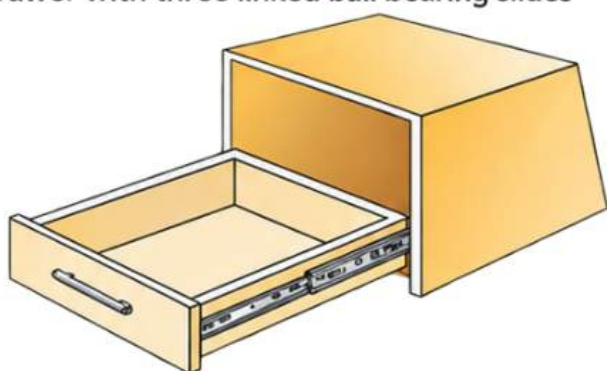


Product features:

1. Fix the slide rail to the middle of the drawer side plate.
2. It can be positioned silently when the slide rail move to the end.
3. The installation of slide rail is ver easy and the whole drawer can be took out in parallel by dismantling the rod.
4. With stopping position and anti-hooking devices, the drawer is easy to be moved out.
5. As drawer can be moved out in whole, so that it's convenient to move large articles.


Inner structure of rail

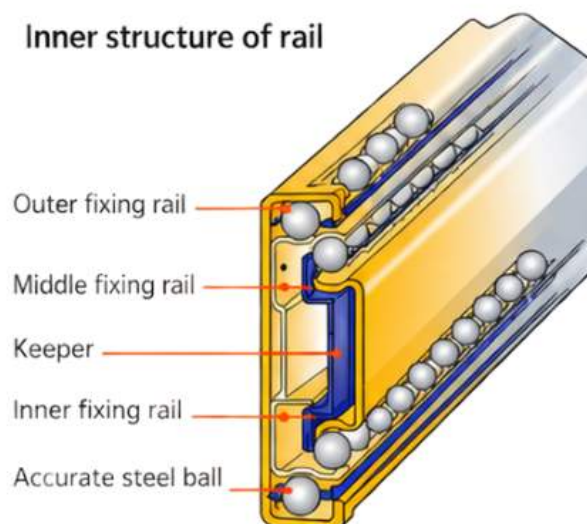

Installation method

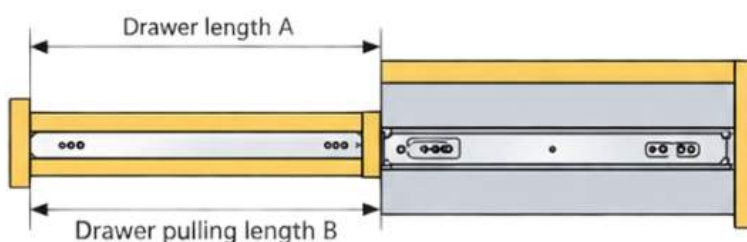


Installation dimension

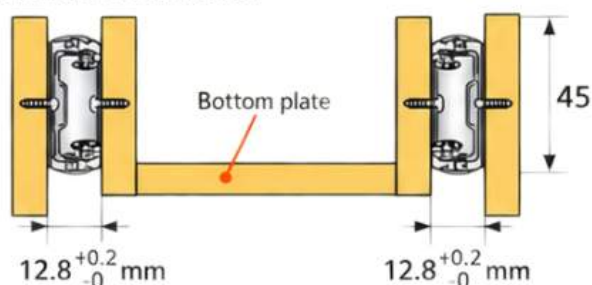



Minimal depth of cupboard = Drawer length + 3

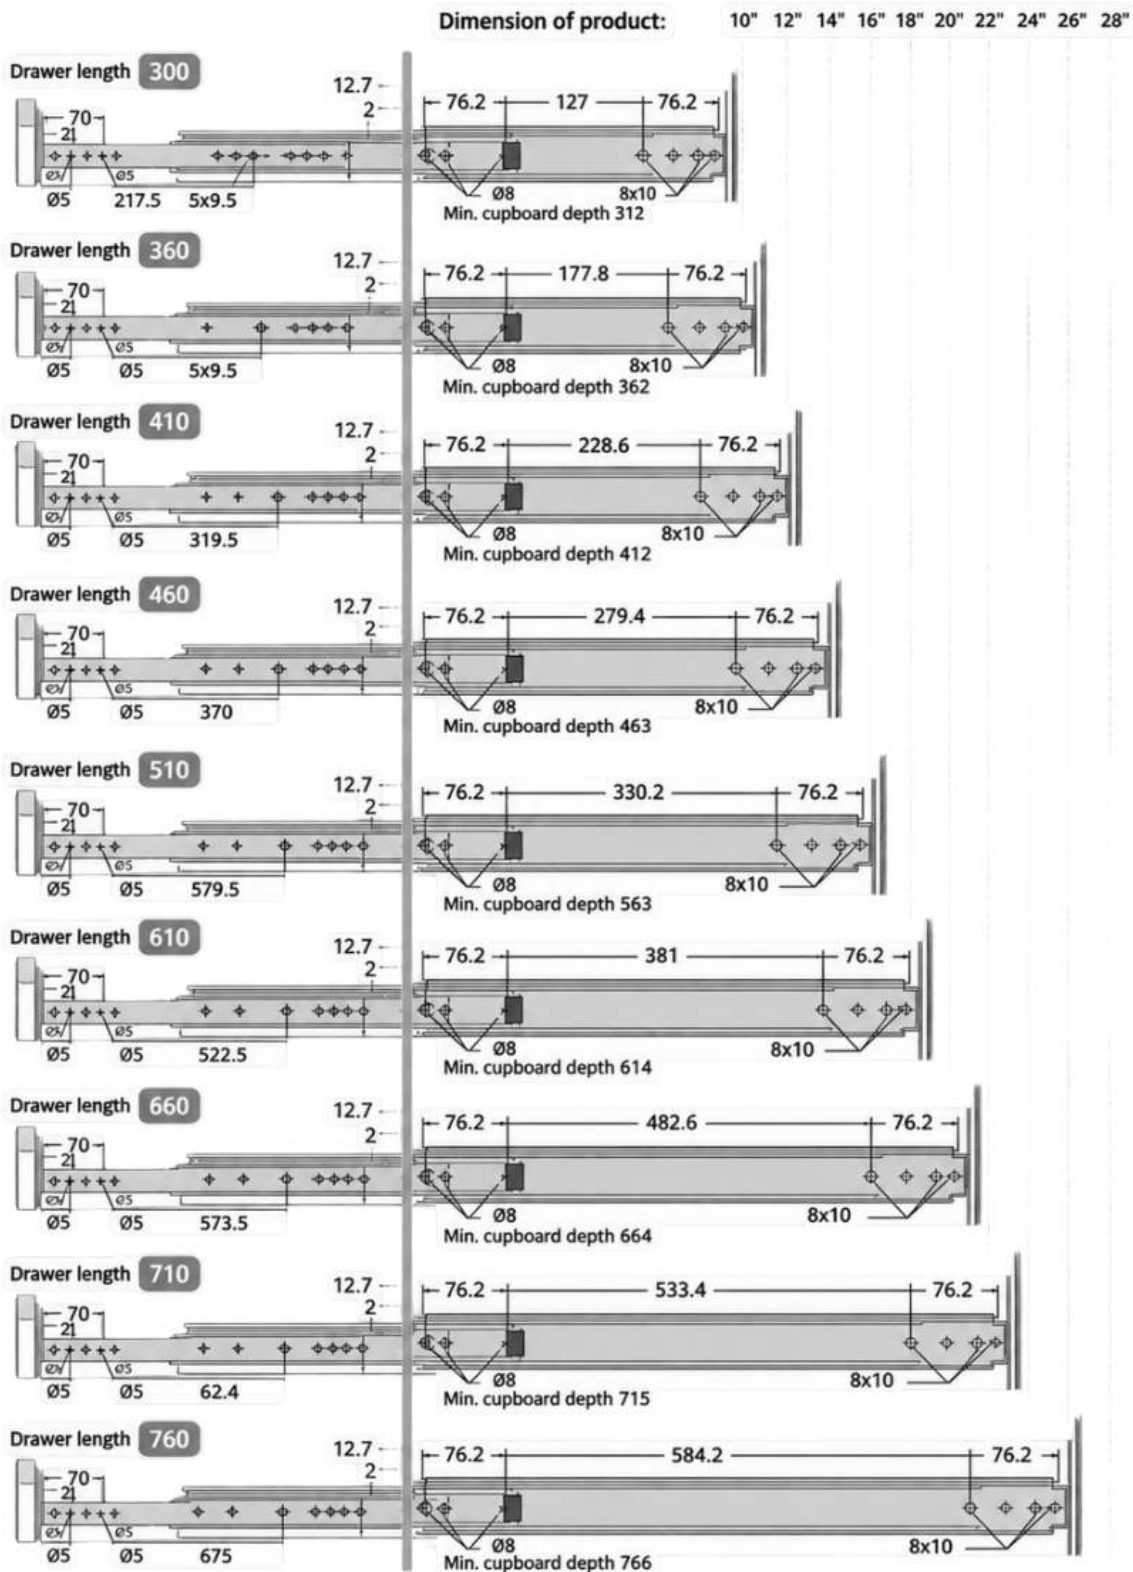

MINEON Product Features

- 1 The slide is installed in the middle of the drawer side panel
- 2 The slide slides into the end and locks quietly in place
- 3 Easy installation and the drawer can be removed by lifting the release lever
- 4 Equipped with a special anti-drop hook, stops at the position to prevent the drawer from sliding out
- 5 The drawer can be fully pulled out, convenient for taking large items

MINEON Slide Product Technology



Surface Brightness



Shanghai materials



Dotted



Fastening Ball Rack



Rear Support



Right Angle

MINEON offers a wide variety of high-quality cold-rolled steel materials and exquisite production technology. The drawers slide smoothly back and forth with light and quiet operation, without any jamming. With a people-oriented design concept, built-in double springs for soft closing, it can effectively absorb external impact force and eliminate noise and vibration. The drawers can be fully pulled out, easy to remove or install without tools, convenient for daily cleaning. In addition, the ball bearing slides are equipped with a high-quality soft-closing device. The internal structure adopts the top technology of the furniture hardware industry, making the drawers open and close more smoothly.

MINEON Ball bearing slides with a wide variety of product designs, using high-quality cold-rolled steel material, exquisite and professional manufacturing. The drawers slide smoothly and silently without any stuck. People-oriented design concept, with double springs soft-closing equipment, can effectively absorb kinetic energy from external force and eliminate the noise and vibration. With detachable function, the drawers can be easily dismantled or installed without tools, convenient for routine cleaning.