

Silent steel ball slide

FOCUS ON INNOVATION CLOSE TO SILENCE

pay attention to innovation
close to silence



OUR FIVE ADVANTAGES

High Quality Bearing Slides

1



HIGH-QUALITY COLD-ROLLED STEEL

Made of high-quality raw materials with precision rolling, offering good toughness and high accuracy.

3



FINE PRODUCTION PROCESS

Precision manufacturing with solid and quiet steel balls.

5



HUMANIZED DESIGN

Soft closing with self-buffering and smooth transition.

2



PERFECT SURFACE TREATMENT

Multi-layer electroplating surface treatment with excellent wear resistance and corrosion resistance.

4



STRONG LOAD-BEARING CAPACITY

Built-in damping device effectively absorbs external force, eliminates noise and vibration caused by impact.



Light-Duty Slides

Light-duty slide rails for compact and furniture applications.




MS600-LD3201




3 Fold Ball Bearing Slide

-  Width: 32mm
-  Material: cold-rolled steel/Galvanized material
-  Length: 250-500mm (10"-20")
-  Thickness: 12±0.2mm
-  Maximum load: 12kg
-  The installed forms: drawer side
-  Surface treatment: electrophoresis black, electro-galvanized
-  Scope: Cabinet/Home furniture/Office furniture/Decoration project etc

Thickness: 0.8*0.8*0.8mm

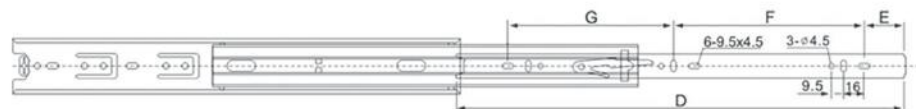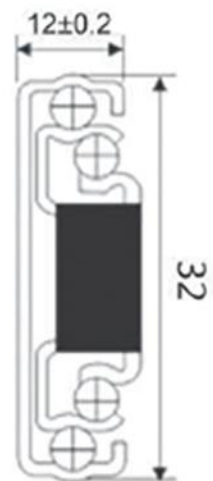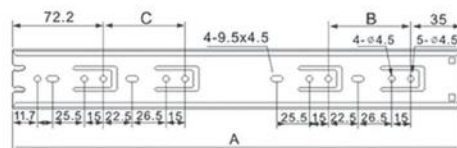

LS3201-250	250	64	—	247	48	—	160
LS3201-300	300	64	64	297	48	96	128
LS3201-350	350	64	64	347	48	128	128
LS3201-400	400	64	64	397	48	160	160
LS3201-450	450	64	64	447	48	160	192
LS3201-500	500	64	64	497	48	192	224
SIZE	A	B	C	D	E	F	G

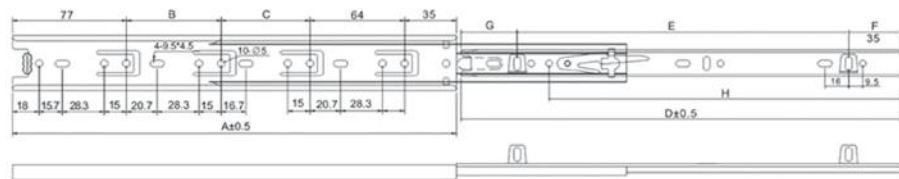

<https://www.mineon.de>



MS600-LD3501



3 Fold Ball Bearing Slide

-  Width: 35mm
-  Material: cold-rolled steel/Galvanized material
-  Length: 250-600mm (10"-24")
-  Thickness: 12.2±0.2mm
-  Maximum load: 10kg-20kg
-  The installed forms: drawer side
-  Surface treatment: electrophoresis black, electro-galvanized
-  Scope: Cabinet/Home furniture/Office furniture/Decoration project etc

Thickness: 0.9*0.9*0.9mm

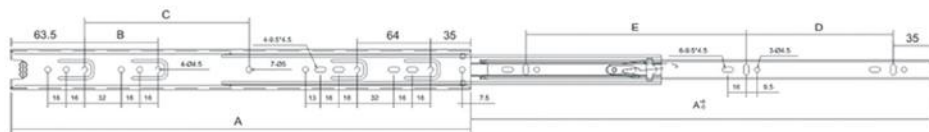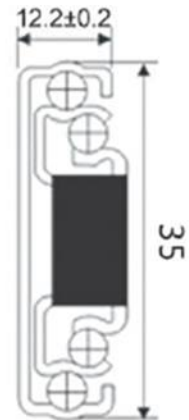

LS3501-250	250	—	42.5	170	—
LS3501-300	300	64	92.5	96	128
LS3501-350	350	64	116.5	96	160
LS3501-400	400	64	143.5	128	192
LS3501-450	450	64	168	160	192
LS3501-500	500	64	187.5	192	224
LS3501-550	550	64	213	192	256
LS3501-600	600	64	237.5	224	288
SIZE	A	B	C	D	E

MS600-LD4001





3 Fold Ball Bearing Slide

-  **Width:** 40mm
-  **Material:** cold-rolled steel/Galvanized material
-  **Length:** 250-600mm (10"-24")
-  **Thickness:** 12.2±0.2mm
-  **Maximum load:** 15kg-18kg
-  **The installed forms:** drawer side
-  **Surface treatment:** electrophoresis black, electro-galvanized
-  **Scope:** Cabinet/Home furniture/Office furniture/Decoration project etc



Thickness: 0.8*0.8*0.8mm

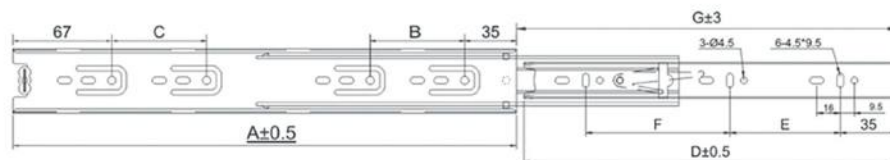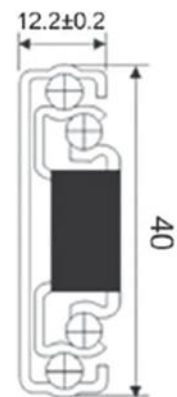

LS4001-250	250	64	-	-	87	247	64
LS4001-300	300	64	-	-	105	297	96
LS4001-350	350	64	94	-	91	347	96
LS4001-400	400	64	96	64	109	397	128
LS4001-450	450	64	96	64	95	447	160
LS4001-500	500	64	128	64	113	497	160
LS4001-550	550	64	160	64	99	547	192
LS4001-600	600	64	192	64	117	497	192
SIZE	A	B	C	D	E	F	G



MS600-LD3801



3 Fold Ball Bearing Slide

-  Width: 38mm
-  Material: cold-rolled steel
-  Length: 250-600mm (10"-24")
-  Thickness: 12.7±0.2mm
-  Maximum load: 20kg-25kg
-  The installed forms: drawer side
-  Surface treatment: electrophoresis black, electro-galvanized
-  Scope: Cabinet/Home furniture/Office furniture/Decoration project etc

Thickness: 1.2*1.2*1.2mm

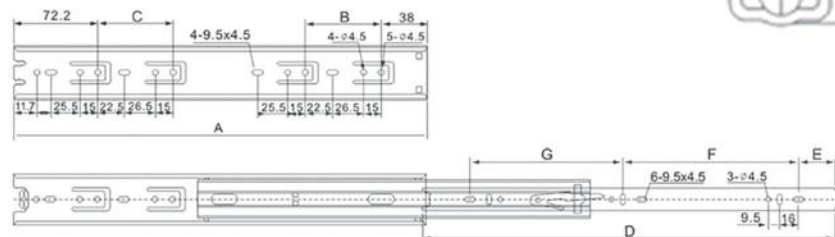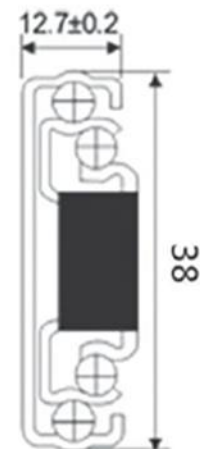

LS3801-250	250	64	—	247	37	83	—
LS3801-300	300	64	64	297	37	111.5	111.5
LS3801-350	350	64	64	347	37	136.5	136.5
LS3801-400	400	64	64	397	37	161.5	161.5
LS3801-450	450	64	64	447	37	186.5	186.5
LS3801-500	500	64	64	497	37	211.5	211.5
LS3801-550	550	64	64	547	37	236.5	236.5
LS3801-600	600	64	64	597	37	261.5	261.5
SIZE	A	B	C	D	E	F	G



MS600-LD4301



3 Fold Ball Bearing Slide

-  Width: 43mm
-  Material: cold-rolled steel
-  Length: 250-600mm (10"-24")
-  Thickness: 12.7±0.2mm
-  Maximum load: 20kg-25kg
-  The installed forms: drawer side
-  Surface treatment: electrophoresis black, electro-galvanized
-  Scope: Cabinet/Home furniture/Office furniture/Decoration project etc

Thickness: 0.9*0.9*0.9mm

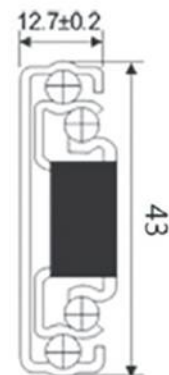

LS4301-250	250	160	-	160	-	-	-	-	30	-	-
LS4301-300	300	96	128	192	-	-	-	34	41.5	-	-
LS4301-350	350	96	160	224	-	-	-	66	59.5	-	-
LS4301-400	400	128	192	224	64	-	-	66	-	30.5	-
LS4301-450	450	160	192	224	128	-	-	66	64	15	-
LS4301-500	500	192	224	224	128	-	51	66	64	15	-
LS4301-550	550	192	256	224	128	96	-	66	64	15	-
LS4301-600	600	224	288	224	128	96	-	66	64	15	55.5
SIZE	A	B	C	D	E	F	G	H	I	J	K

MS600-LD4201





3 Fold Ball Bearing Slide


-  Width: 42mm
-  Material: cold-rolled steel
-  Length: 250-900mm (10"-36")
-  Thickness: 12.7±0.2mm
-  Maximum load: 20kg-25kg
-  The installed forms: drawer side
-  Surface treatment: electrophoresis black, electro-galvanized
-  Scope: Cabinet/Home furniture/Office furniture/Decoration project etc



Thickness: 0.9*0.9*0.9mm

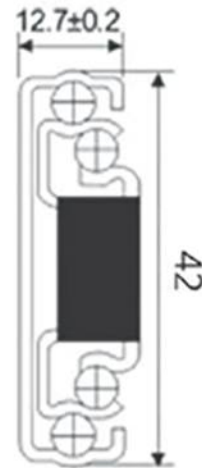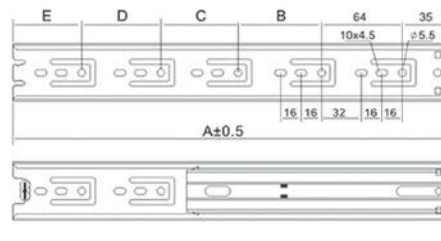

LS4201-250	250	96	-	-	55	247	64	96	50
LS4201-300	300	96	-	-	105	297	64	128	68
LS4201-350	350	96	94	-	91	347	96	160	54
LS4201-400	400	96	96	-	109	397	128	192	40
LS4201-450	450	96	96	64	95	447	160	192	58
LS4201-500	500	96	128	64	113	497	160	224	76
LS4201-550	550	96	192	64	99	547	192	224	94
LS4201-600	600	96	224	64	117	497	192	288	80
SIZE	A	B	C	D	E	F	G	H	H

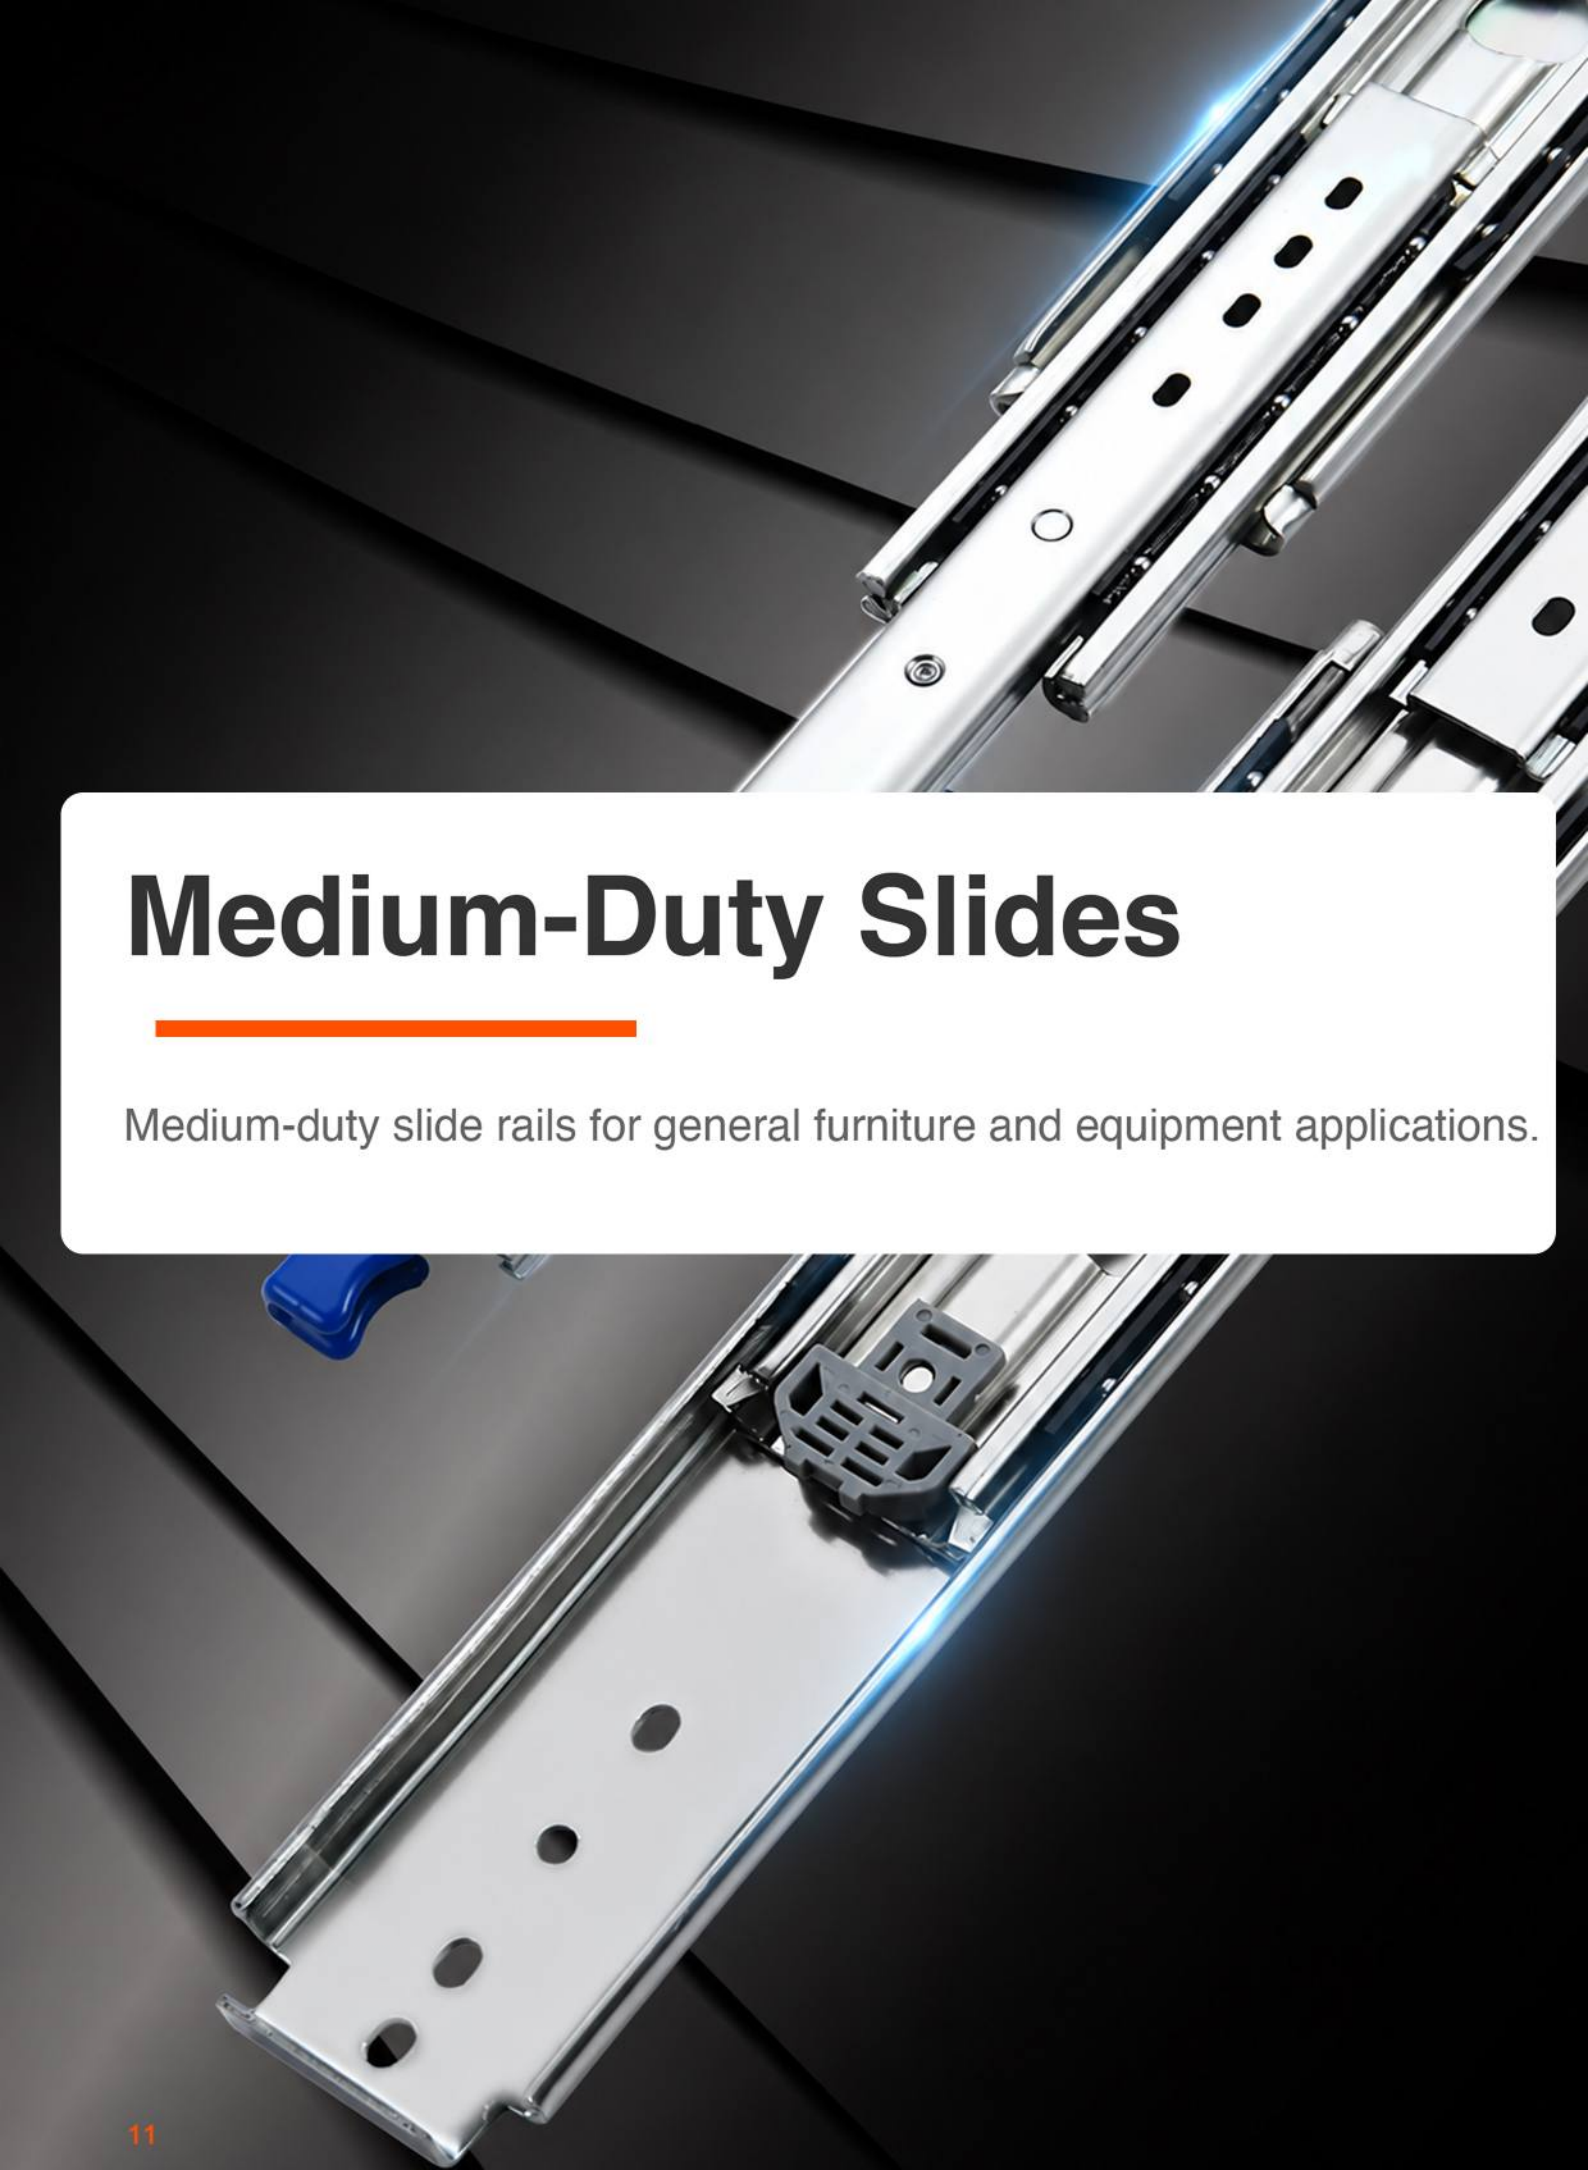The background of the page is a close-up, high-angle photograph of several parallel medium-duty slide rails. The rails are made of polished metal, likely chrome-plated steel, and feature a series of circular mounting holes. The lighting is dramatic, with strong highlights and deep shadows, emphasizing the metallic texture and the mechanical components of the slides. A white rectangular box with rounded corners is positioned in the center-left, containing the title and a short description. The overall aesthetic is clean, professional, and technical.

Medium-Duty Slides


Medium-duty slide rails for general furniture and equipment applications.

MS600-MD4501





3 Fold Ball Bearing Slide

-  Width: 45mm
-  Material: cold-rolled steel
-  Length: 250-900mm (10"-36")
-  Thickness: 12.7±0.2mm
-  Maximum load: 20kg-45kg
-  The installed forms: drawer side
-  Surface treatment: electrophoresis black, electro-galvanized
-  Scope: Cabinet/Home furniture/Office furniture/Decoration project etc

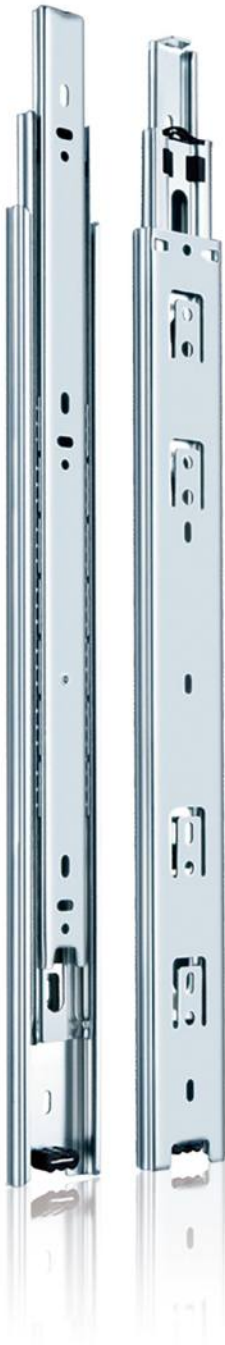

Thickness: 1.2*1.2*1.4mm

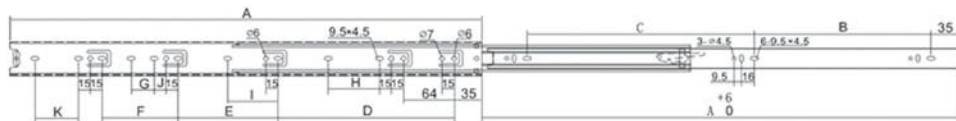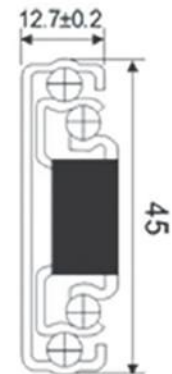

LS4501-250	250	-	-	247	64	96
LS4501-300	300	-	-	297	96	128
LS4501-350	350	64	-	347	96	160
LS4501-400	400	96	-	397	128	192
LS4501-450	450	96	64	447	128	224
LS4501-500	500	128	64	497	160	256
LS4501-550	550	192	64	547	224	224
LS4501-600	600	224	64	597	224	288
LS4501-650	650	256	64	647	320	256
LS4501-700	700	320	64	697	288	288
SIZE	A	B	C	D	E	F

MS600-MD4502





3 Fold Ball Bearing Slide

-  **Width:** 45mm
-  **Material:** cold-rolled steel
-  **Length:** 300-600mm (12"-24")
-  **Thickness:** 12.7±0.2mm
-  **Maximum load:** 30kg-45kg
-  **The installed forms:** drawer side
-  **Surface treatment:** electrophoresis black, electro-galvanized
-  **Scope:** Cabinet/Home furniture/Office furniture/Decoration project etc

Thickness: 1.2*1.2*1.4mm



Soft closing system, more quiet

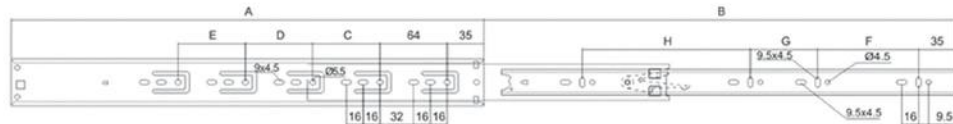

LS4502-300	300	290	64	—	—	96	120	—
LS4502-350	350	350	96	—	—	128	128	—
LS4502-400	400	400	96	64	—	128	160	—
LS4502-450	450	450	96	96	—	96	64	160
LS4502-500	500	500	96	96	64	128	64	192
LS4502-550	550	550	96	128	64	160	64	224
LS4502-600	600	600	96	160	64	160	64	256
SIZE	A	B	C	D	E	F	G	H


MS600-MD4503





3 Fold Ball Bearing Slide

-  Width: 45mm
-  Material: cold-rolled steel
-  Length: 300-600mm (12"-24")
-  Thickness: 12.7±0.2mm
-  Maximum load: 30kg-45kg
-  The installed forms: drawer side
-  Surface treatment: electrophoresis black, electro-galvanized
-  Scope: Cabinet/Home furniture/Office furniture/Decoration project etc

Thickness: 1.2*1.2*1.4mm

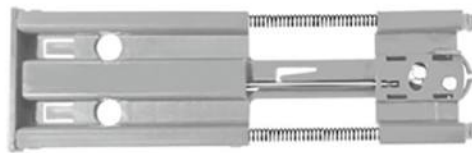

Soft Closing System, More Quiet

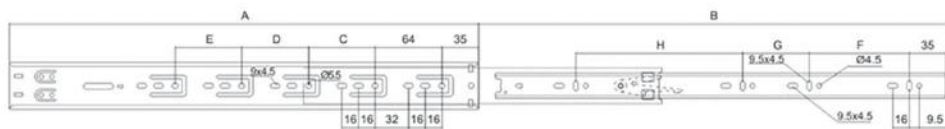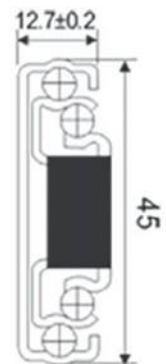

LS4503-300	300	290	-	-	-	96	120	-
LS4503-350	350	350	94	-	-	128	128	-
LS4503-400	400	400	96	-	-	128	160	-
LS4503-450	450	450	96	64	-	96	64	160
LS4503-500	500	500	96	96	-	128	64	192
LS4503-550	550	550	96	196	64	160	64	224
LS4503-600	600	600	96	196	96	160	64	256
SIZE	A	B	C	D	E	F	G	H

MS600-MD4504





3 Fold Ball Bearing Slide

-  Width: 45mm
-  Material: cold-rolled steel
-  Length: 300-600mm (12"-24")
-  Thickness: 12.7±0.2mm
-  Maximum load: 30kg-45kg
-  The installed forms: drawer side
-  Surface treatment: electrophoresis black, electro-galvanized
-  Scope: Cabinet/Home furniture/Office furniture/Decoration project etc

Thickness: 1.2*1.2*1.4mm



Soft Closing System, More Quiet

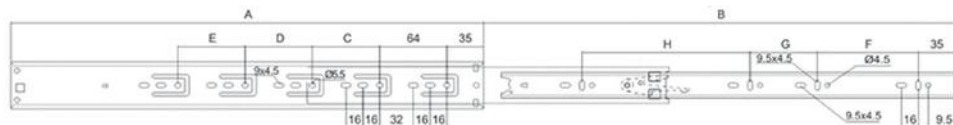

LS4504-300	300	290	64	—	—	96	120	—
LS4504-350	350	350	96	—	—	128	128	—
LS4504-400	400	400	96	64	—	128	160	—
LS4504-450	450	450	96	96	—	96	64	160
LS4504-500	500	500	96	96	64	128	64	192
LS4504-550	550	550	96	128	64	160	64	224
LS4504-600	600	600	96	160	64	160	64	256
SIZE	A	B	C	D	E	F	G	H

MS600-MD4505





3 Fold Ball Bearing Slide

-  **Width:** 45mm
-  **Material:** cold-rolled steel
-  **Length:** 300-600mm (12"-24")
-  **Thickness:** 12.7±0.2mm
-  **Maximum load:** 30kg-45kg
-  **The installed forms:** drawer side
-  **Surface treatment:** electrophoresis black, electro-galvanized
-  **Scope:** Cabinet/Home furniture/Office furniture/Decoration project etc

Thickness: 1.2*1.2*1.4mm



Soft Closing System, More Quiet

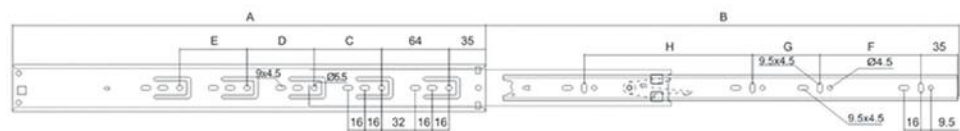

LS4505-300	300	290	64	—	—	96	120	—
LS4505-350	350	350	96	—	—	128	128	—
LS4505-400	400	400	96	64	—	128	160	—
LS4505-450	450	450	96	96	—	96	64	160
LS4505-500	500	500	96	96	64	128	64	192
LS4505-550	550	550	96	128	64	160	64	224
LS4505-600	600	600	96	160	64	160	64	256
SIZE	A	B	C	D	E	F	G	H


MS600-MD4506




3 Fold Ball Bearing Slide

-  Width: 45mm
-  Material: cold-rolled steel
-  Length: 250-600mm (10"-24")
-  Thickness: 12.7±0.2mm
-  Maximum load: 45kg
-  The installed forms: drawer side
-  Surface treatment: electrophoresis black, electro-galvanized
-  Scope: Cabinet/Home furniture/Office furniture/Decoration project etc

Thickness: 1.2*1.2*1.4mm

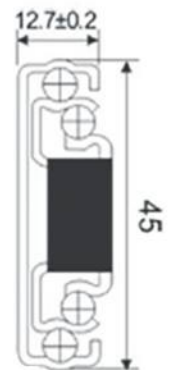

Soft Closing System, More Quiet

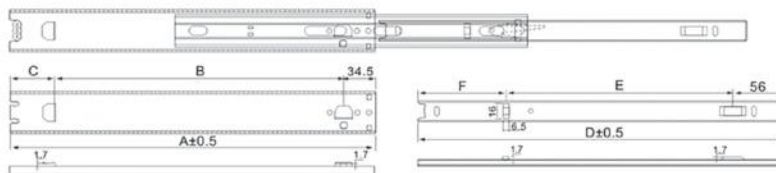


LS4506-250	250	164.5	50	247	96	95
LS4506-300	300	214.5	50	297	146	95
LS4506-350	350	264.5	50	347	196	95
LS4506-400	400	314.5	50	397	246	95
LS4506-450	450	364.5	50	447	296	95
LS4506-500	500	414.5	50	497	346	95
LS4506-550	550	464.5	50	547	396	95
LS4506-600	600	514.5	50	597	446	95
SIZE	A	B	C	D	E	F

MS600-MD4508



3 fold booting ball bearing slide

-  **Width:** 45mm
-  **Material:** cold-rolled steel
-  **Length:** 250-600mm (10"-24")
-  **Thickness:** 12.7±0.2mm
-  **Maximum load:** 45kg
-  **The installed forms:** drawer side
-  **Surface treatment:** electrophoresis black, electro-galvanized
-  **Scope:** Furniture slide

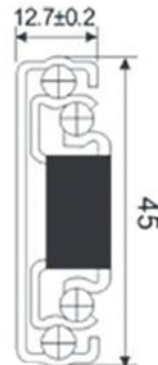

Thickness Range

- 1、1.2X1.2X1.4mm 2、1.1X1.2X1.4mm 3、1.0X1.0X1.2mm
 4、1.0X1.0X1.0mm

LS4508-250	250	176	250
LS4508-300	300	226	300
LS4508-350	350	276	350
LS4508-400	400	326	400
LS4508-450	450	376	450
LS4508-500	500	426	500
LS4508-550	550	476	550
LS4508-600	600	526	600
SIZE	A	B	L

MS600-MD4509





3 Fold Ball Bearing Slide

-  Width: 45mm
-  Material: cold-rolled steel
-  Length: 300-600mm (12"-24")
-  Thickness: 12.7±0.2mm
-  Maximum load: 35kg
-  The installed forms: drawer side
-  Surface treatment: electrophoresis black, electro-galvanized
-  Scope: Cabinet/Home furniture/Office furniture/Decoration project etc

Thickness: 1.2*1.2*1.4mm

Soft Closing System, More Quiet

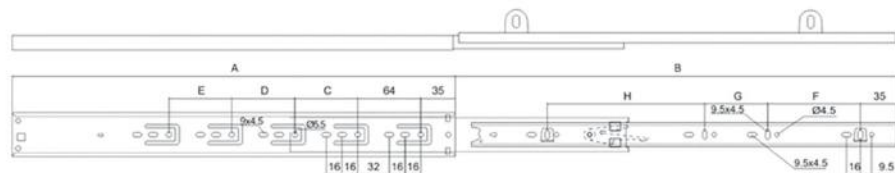


LS4509-300	300	290	64	—	—	96	—	110
LS4509-350	350	350	96	—	—	128	—	128
LS4509-400	400	400	96	64	—	128	—	160
LS4509-450	450	450	96	96	—	96	64	224
LS4509-500	500	500	96	96	64	128	64	256
LS4509-550	550	550	96	128	64	160	64	288
LS4509-600	600	600	96	160	64	160	64	320
SIZE	A	B	C	D	E	F	G	H






Heavy-Duty Slides

Heavy-duty slide rails for industrial, equipment and high-load applications.

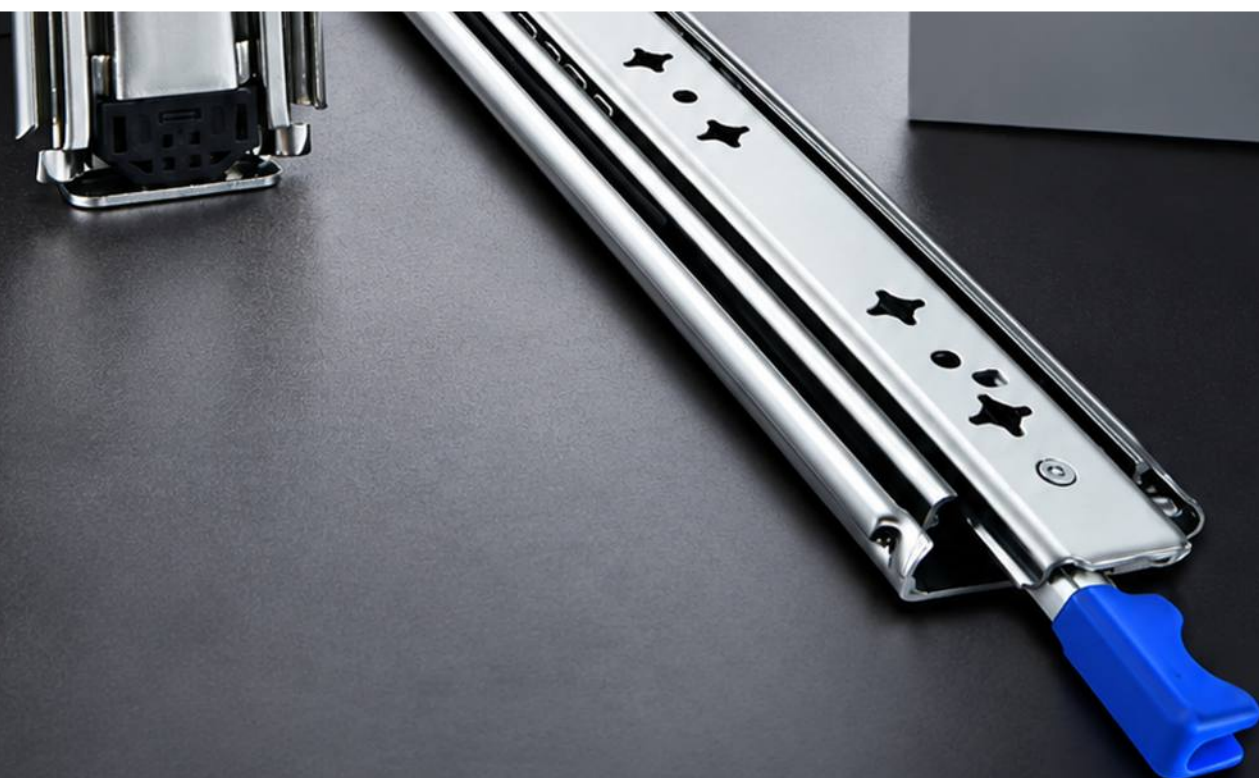

MS600-HD1050-AT

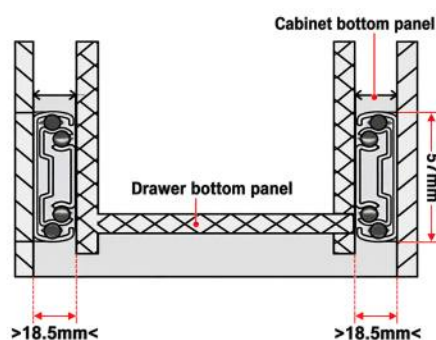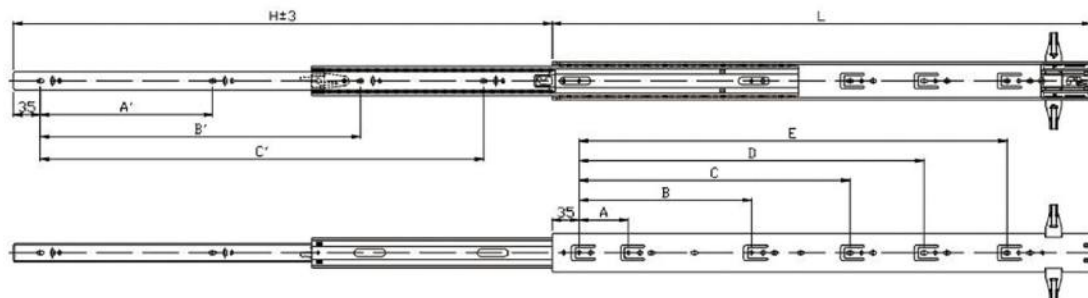

Specification

Length: 12" ~ 28" **Height:** 49.5mm

Slide Space: 13mm




Load: 68kgs

Finishing: Clear zinc plating, Yellow zinc plating,
Black E-coating

Packing: 10 sets/carton (no screws)

Product Model	SIZE	L	A	B	C	D	E	A'	B'	C'	H
1050-AT	12"	300	64					96	192		300
	14"	350	64	224				128	256		350
	16"	400	64	224				128	320		400
	18"	450	64	224				160	352		450
	20"	500	64	224	352			192	416		500
	22"	550	64	224	352	416		224	448		550
	24"	600	64	224	352	480		224	512		600
	26"	650	64	224	352	512		256	544		650
	28"	700	64	224	352	480		288	608		700
	30"	750	64	224	352	480	608	288	640		750
	32"	800	64	224	352	480	672	256	512	704	800

MS600-HD1050-H

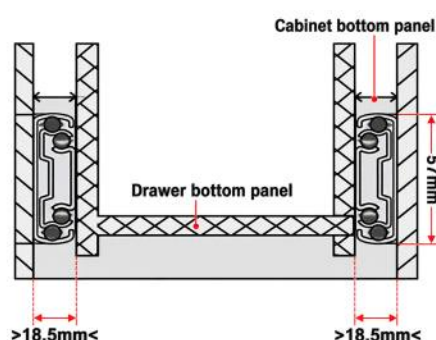

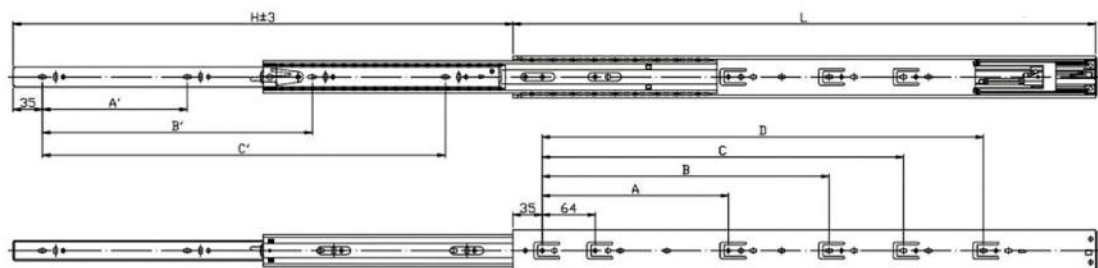


Specification

Length: 14" ~ 32" **Height:** 50mm
Slide Space: 13mm
Load: 60kgs/50000Cycles
Finishing: Clear zinc plating, Yellow zinc plating
 Black E-coating
Packing: 10 sets/carton (no screws)

Product Model	SIZE	L	A	B	C	D	A'	B'	C'	H
1050-HD	10"	250						166		200
	12"	300					96	216		300
	14"	350	192				128	256		350
	16"	400	224				128	288		400
	18"	450	224	288			160	320		450
	20"	500	224	352			192	384		500
	22"	550	224	352			224	416		550
	24"	600	224	352	448		224	480		600
	26"	650	224	352	480		256	544		650
	28"	700	224	352	480		288	576		700
	30"	750	224	352	480	576	288	640		750
	32"	800	224	352	480	608	256	512	672	800

MS600-HD1050-L

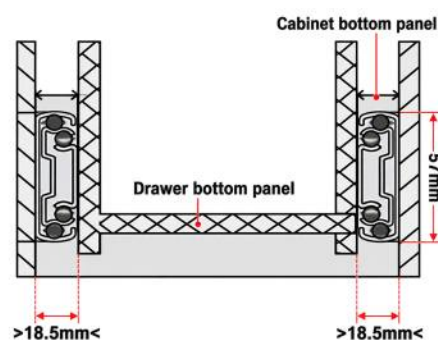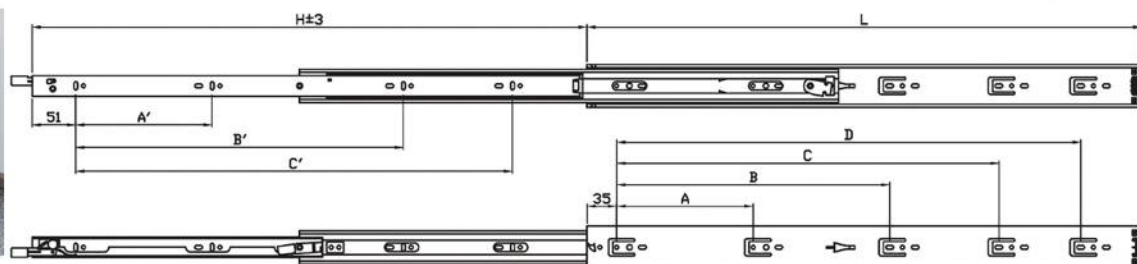

Specification

Length: 12"~40" **Height:** 50mm


Side Space: 13mm

Load: 68kg / 50000 Cycles

Finishing: Clear zinc plating, Yellow zinc plating,
Black E-coating

Packing: 10 sets/carton (no screws)






Product Model	SIZE	L	A	B	C	D	A'	B'	C'	H
1050-LILO	12"	300	192				192			300
	14"	350	224				256			350
	16"	400	256				256			400
	18"	450	64	256	352		96	320		450
	20"	500	64	256	384		96	384		500
	22"	550	128	320	416		128	384		550
	24"	600	128	352	480		160	416		600
	26"	650	160	352	512		192	384	512	650
	28"	700	160	384	544		192	416	576	700
	30"	750	160	448	608		192	448	608	750
	32"	800	128	384	544	672	192	480	672	800
	34"	850	128	416	576	736	224	512	704	850
	36"	900	160	448	640	800	224	576	768	900
	38"	950	192	480	672	832	224	608	832	950
	40"	1000	192	512	704	864	256	640	864	1000

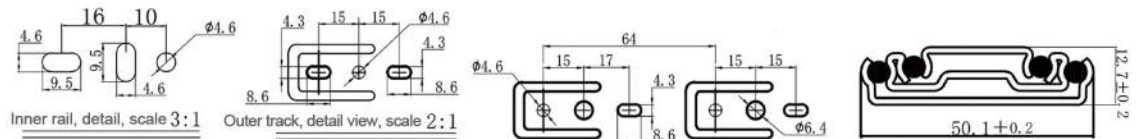

The diagram illustrates the assembly of a cabinet and a drawer. The **Cabinet bottom panel** is shown at the top, with a height dimension of **57mm**. The **Drawer bottom panel** is shown below it. The distance between the inner vertical supports is labeled as **>18.5mm<** on both the left and right sides. The diagram uses cross-hatching to represent different materials or components.

<https://www.mineon.de>

MS600-HD1551

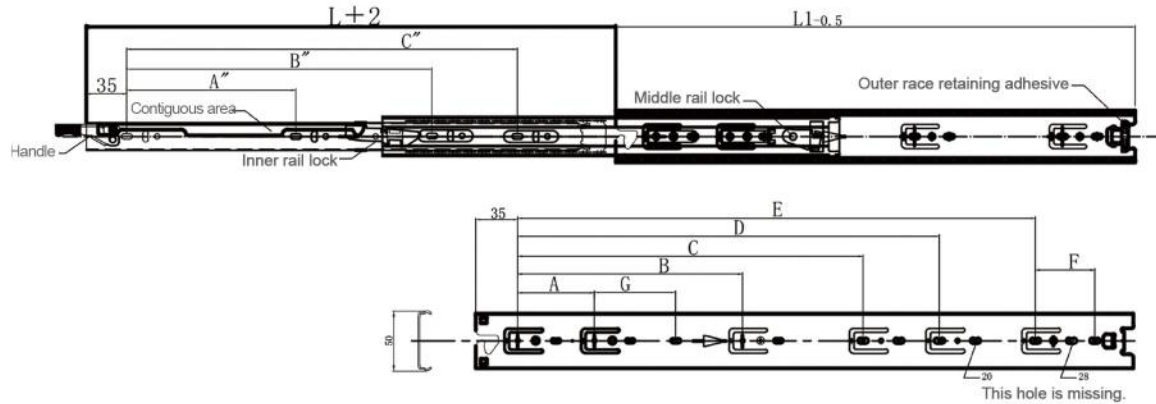


Specification

- Height: 51.5 mm
- Material Thickness: 1.5 × 1.5 × 1.5 / 1.8 × 1.5 × 1.5 mm
- Material: Q235 High-Strength Cold-Rolled Steel
- Dynamic Load Capacity: 68 kg / 18"
- Installation: Side Mounting
- Surface Treatment: Blue-White Zinc / Electrophoretic Black
- Length: 250-1000 mm (10"-40")
- Features: Full Extension / Heavy-Duty / Detachable
- Application: Household and office furniture, heavy-duty drawers, electrical tool cabinets, etc.


Two-Way Locking Function

The drawer can be opened or closed by pressing the handle. It locks automatically when fully extended or fully closed, preventing accidental sliding and ensuring drawer stability and safety.

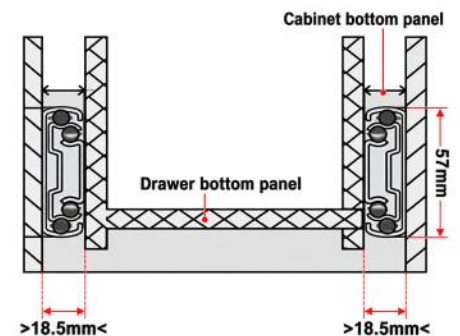

Product Model	SIZE	L	L1	A'	B'	C'	A	B	C	D	E	F	G
C1551	12"	300	310	96	208				192				
	14"	350	360	128	256		64		224				
	16"	400	410	128	288		64		224	288			
	18"	450	460	160	352		64		224	352			
	20"	500	510	192	416		64		224	352	416		
	22"	550	560	224	448		64	256	352		416	64	96
	24"	600	610	224	512		64	256	352	480			96
	26"	650	660	256	544		64	192	352	512			
	28"	700	710	288	608		64	224	352	480	608		96
	30"	750	760	288	640		64	224	352	480	640		96
	32"	800	810	256	512	704	64	224	384	544	704		96
	34"	850	850	256	512	736	64	224	384	544	736		96
	36"	900	900	256	544	800	64	224	416	576	768		96
	38"	950	950	288	576	864	64	224	448	640	832		96
	40"	1000	1000	288	608	896	64	224	480	704	896		96

MS600-HD2053-A

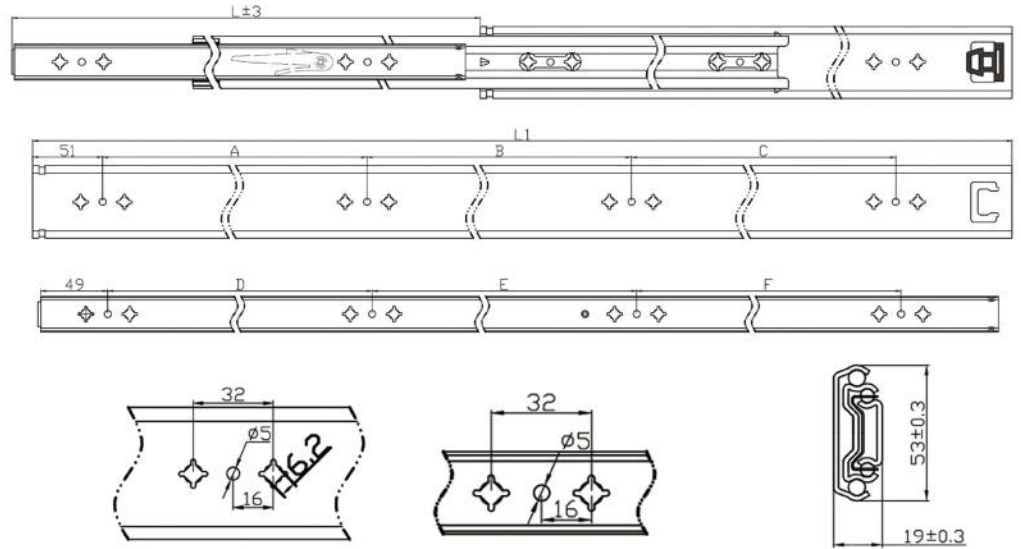

Specification

Height: 53.3 mm

Material: Q235 High-Strength Cold-Rolled Steel

Dynamic Load Capacity: 130 kg / 18"


Installation: Side Mounting

Surface Treatment: Blue-White Zinc

Length: 200–1000 mm (8"–40")

Features: Full Extension / Heavy-Duty / Detachable

Application: Home appliances, tool cabinets, and other large heavy-duty drawers.

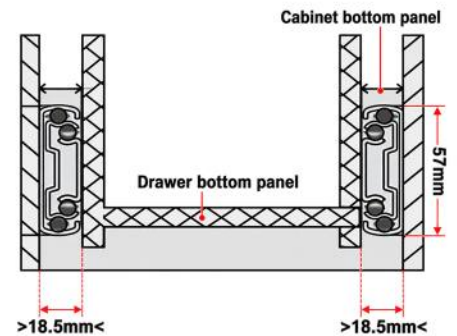


Product Model	SIZE	L	L1	A	B	C	D	E	F
A2053	8"	200	200	96			144		
	10"	250	250	128			160		
	12"	300	300	192			192		
	14"	350	350	224			224		
	16"	400	400	128	160		96	192	
	18"	450	450	160	160		128	192	
	20"	500	500	192	192		160	224	
	22"	550	550	192	224		192	224	
	24"	600	600	128	160	192	192	160	128
	26"	650	650	160	160	192	192	192	160
	28"	700	700	192	192	192	192	192	192
	30"	750	750	192	192	192	192	224	192
	32"	800	800	224	224	224	224	224	224
	34"	850	850	224	224	224	224	224	224
	36"	900	900	256	256	256	256	256	256
	38"	950	950	256	288	288	256	288	288
	40"	1000	1000	288	288	288	288	288	288



Diagram illustrating the assembly of a cabinet and drawer. The diagram shows a cross-section of the cabinet bottom panel and the drawer bottom panel. The cabinet bottom panel is labeled "Cabinet bottom panel" and the drawer bottom panel is labeled "Drawer bottom panel". The distance between the inner walls of the cabinet is indicated as $>18.5\text{mm}<$. The height of the cabinet bottom panel is indicated as 57mm . The distance between the inner walls of the drawer is also indicated as $>18.5\text{mm}<$.

Product Model	SIZE	L	A	B	C	D	F	G	H	T
A2053-01	12"	305	224				224			320
	14"	355	160	96			224			370
	16"	405	160	160			192	96		420
	18"	455	160	224			192	160		470
	20"	505	160	160	96		192	192		520
	22"	555	160	160	160		192	256		570
	24"	610	160	160	192		192	192	96	625
	26"	660	160	160	160	96	192	192	160	675
	28"	710	160	160	160	160	192	192	192	725

MS600-HD2053-S1

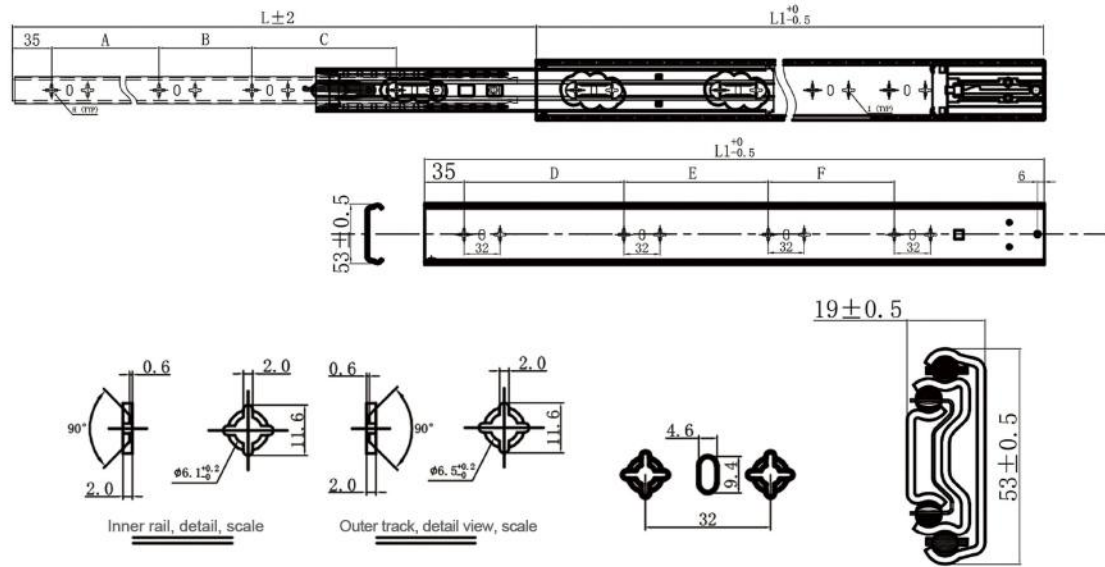

Specification

Height: 53.3 mm

Material: Q235 High-Strength Cold-Rolled Steel

Material Thickness: 2.0 × 2.0 × 2.0 × 2.0 mm

Dynamic Load Capacity: 115 kg / 18"


Installation: Side Mounting

Surface Treatment: Blue-White Zinc

Length: 300–1000 mm (12"–40")


Features: Full Extension / Heavy-Duty / Detachable

Application: Home appliances, tool cabinets, and other large heavy-duty drawers

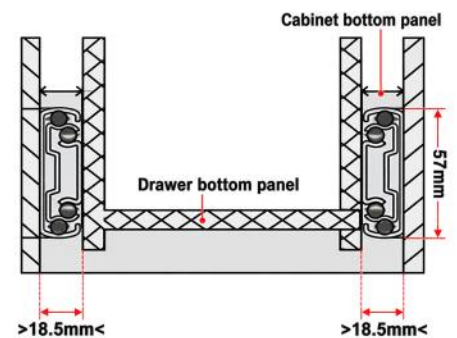

Product Model	SIZE	L1	L	A	B	C	D	E	F
B2053-S1	12"	300	315	224			128		
	14"	350	365	128	128		160		
	16"	400	415	128	160		224		
	18"	450	465	160	160		256		
	20"	500	515	192	192		160	160	
	22"	550	565	192	224		192	160	
	24"	600	615	224	256		224	192	
	26"	650	665	256	256		256	224	
	28"	700	715	228	228		288	224	
	30"	750	765	224	224	192	192	192	160
	32"	800	815	224	256	192	192	192	192

MS600-HD2053

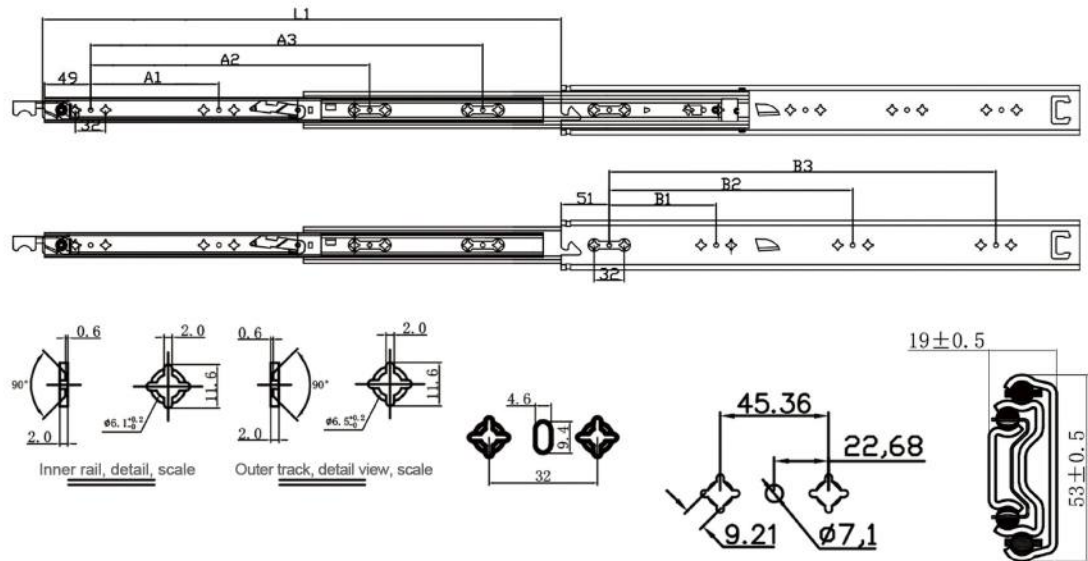

Specification

Height: 53.3 mm

Material: Q235 High-Strength Cold-Rolled Steel

Material Thickness: 2.0 × 2.0 × 2.0 × 2.0 mm

Dynamic Load Capacity: 115 kg / 18"


Installation: Side Mounting

Surface Treatment: Blue-White Zinc

Length: 250–2000 mm (10"–80")




Features: Full Extension / Heavy-Duty / Detachable

Application: Oversized and heavy-duty drawers in RVs, campers, tool cabinets, etc.

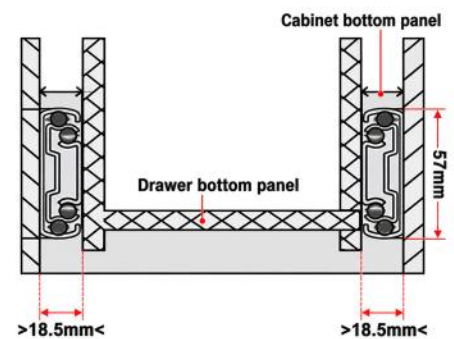

Product Model	SIZE	L1	A1	A2	A3	B1	B2	B3
C2053	14"	350	96	128		128	96	
	16"	400	128	160		160	128	
	18"	450	128	192		192	128	
	20"	500	160	224		224	160	
	22"	550	192	224		224	192	
	24"	600	192	228		256	224	
	26"	650	192	192	128	128	192	192
	28"	700	192	192	192	128	224	224
	30"	750	192	224	192	160	224	192
	32"	800	224	224	224	160	224	224
	34"	850	224	256	192	224	224	224
	36"	900	256	256	256	256	256	256
	38"	950	256	288	288	256	288	288
	40"	1000	288	288	288	288	288	288

MS600-HD1053-L

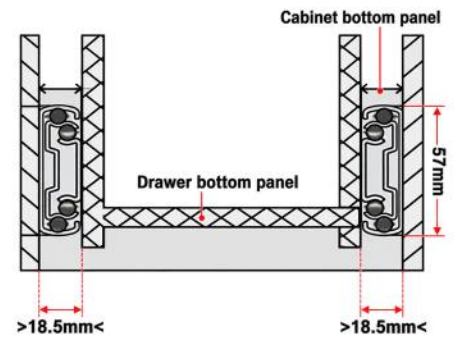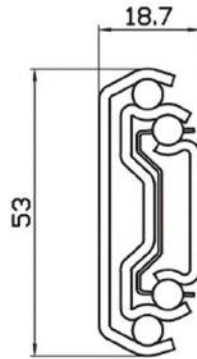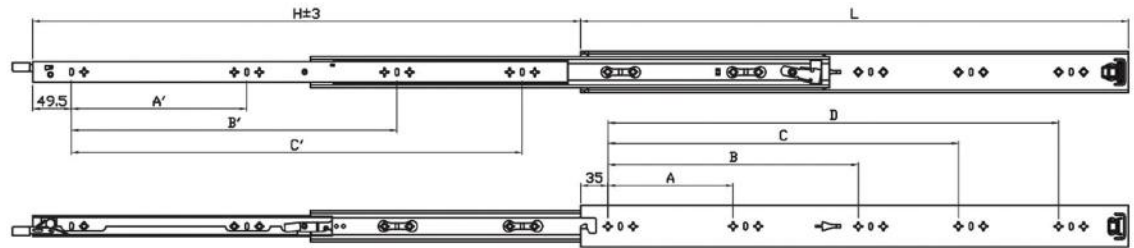

Specification




- Length: 12"-40"
- Height: 53 mm
- Side Clearance: 18.7 mm
- Load Capacity: 100 kg
- Durability: 50,000 Cycles
- Surface Treatment: Clear Zinc Plating / Yellow Zinc Plating / Black E-Coating
- Packing: 10 Sets / Carton (No Screws)

Internal Recessed Design

Through the internal recessed design and high-strength plastic coordination of the mid-rail, the slide operates smoothly during drawer extension, ensuring the stability and safety of the drawer.

Product Model	SIZE	L	A	B	C	D	A'	B'	C'	H
1053-LILO	12"	300	192				192			300
	14"	350	224				256			350
	16"	400	288				588			400
	18"	450	192	320			96	320		450
	20"	500	224	384			128	384		500
	22"	550	256	416			160	416		550
	24"	600	288	480			160	480		600
	26"	650	288	512			192	384	512	650
	28"	700	320	576			224	416	576	700
	30"	750	192	384	608		224	448	608	750
	32"	800	192	384	544	672	224	480	672	800
	34"	850	192	416	576	732	224	512	736	850
	36"	900	192	448	608	768	224	512	768	900
	38"	950	192	480	640	832	224	576	832	950
	40"	1000	192	480	672	864	224	640	864	1000

MS600-HD1050-AT

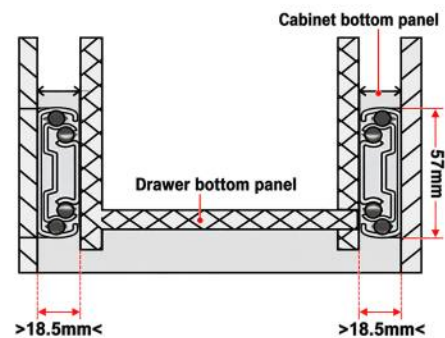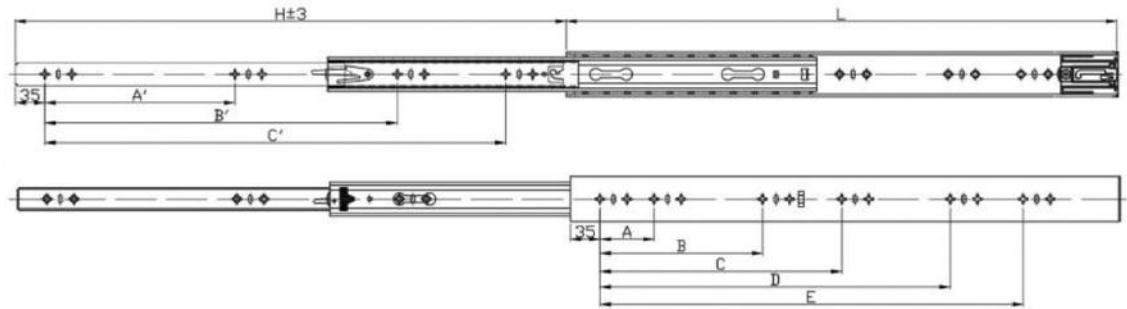

Specification

Length: 12"-40"

Height: 53 mm

Side Clearance: 18.7 mm

Load Capacity: 100 kg


Surface Treatment: Clear Zinc Plating / Yellow Zinc Plating / Black E-Coating

Packing: 10 Sets / Carton (No Screws)

Internal Recessed Design

Through the internal recessed design and high-strength plastic coordination of the mid-rail, the slide operates smoothly during drawer extension, ensuring the stability and safety of the drawer.

Product Model	SIZE	L	A	B	C	D	E	A'	B'	C'	H
1053-SN	14"	350	192					256			350
	16"	400	64	224				96	228		400
	18"	450	64	288				128	320		450
	20"	500	64	224	352			160	384		500
	22"	550	64	256	384			160	416		550
	24"	600	64	256	416			192	480		600
	26"	650	64	192	228	480		224	416	544	650

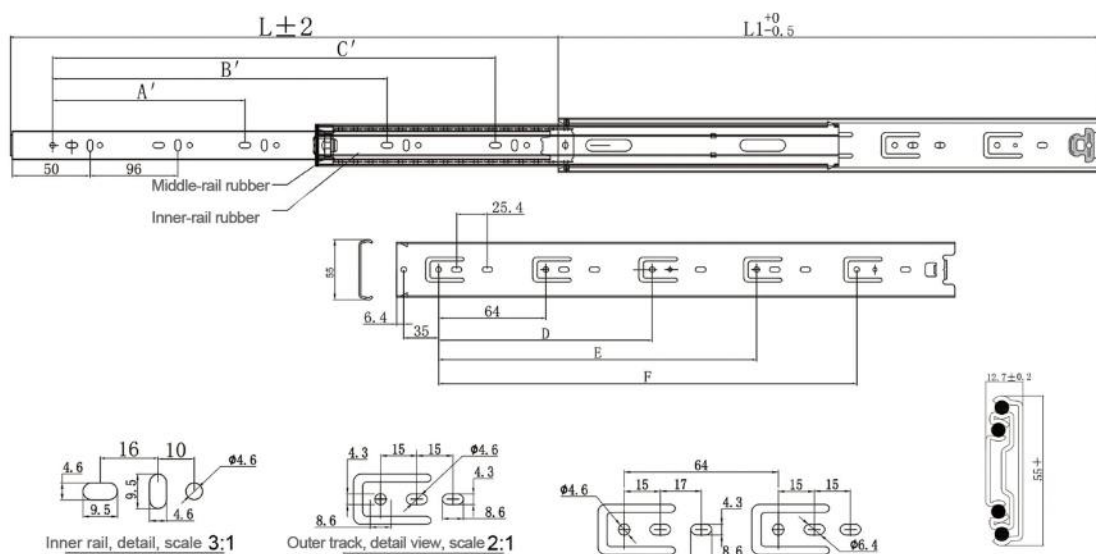

Cabinet bottom panel

Drawer bottom panel

5 mm


>18.5mm<

>18.5mm<

Features: Drawer and cabinet rails can be installed separately for easier installation and removal. The locking function prevents unintended drawer movement. Custom lengths and mounting-hole positions are available.

<https://www.mineon.de>

MS600-HD1050-AT

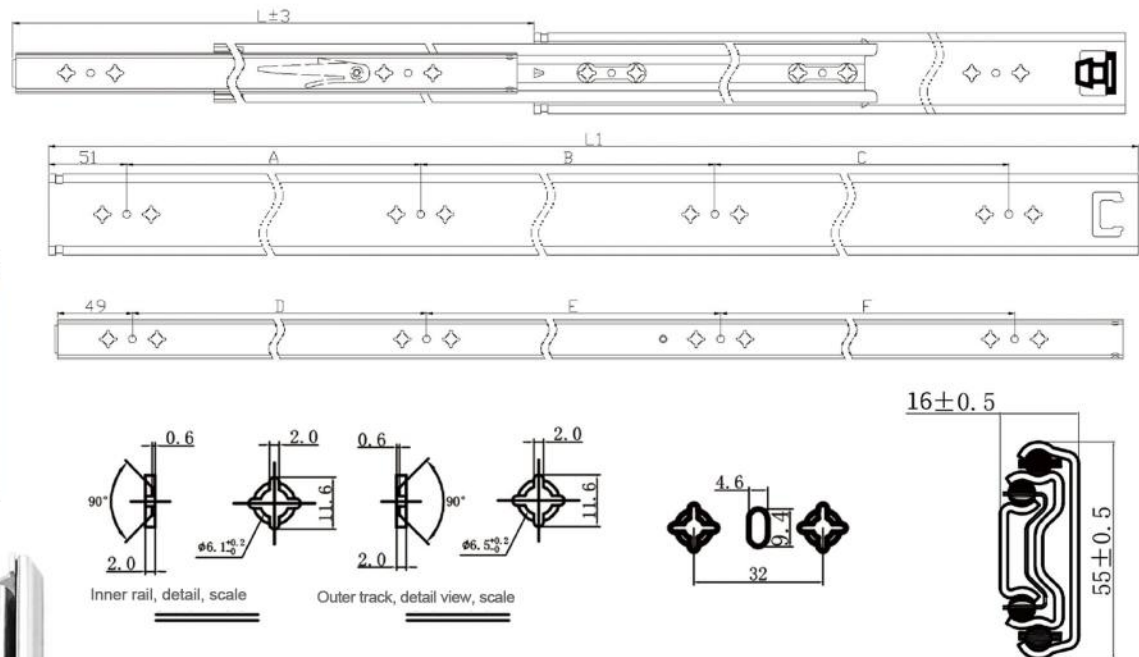


Specification


- Length: 200–1000 mm (8"–40")
- Installation Clearance: 16 mm (+0.5 mm / -0)
- Maximum Load: 130 kg
- Extension: Full Extension
- Installation: Side Mounting / Detachable
- Surface Treatment: Blue Zinc / Black Zinc / Electrophoresis
- Material: Cold-Rolled Steel
- Material Thickness: 2.0 × 1.8 × 2.0 mm

Application: File cabinets, cabinets, lockers, display cabinets, tool boxes, and other high-load wooden and steel drawers.

Features: Drawer and cabinet rails can be installed separately for easier installation and removal. The locking function prevents unintended drawer movement. Custom lengths and mounting-hole positions are available.

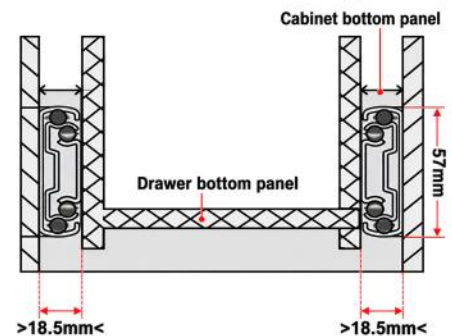

Product Model	SIZE	L	L1	A	B	C	D	E	F
A2055-16	8"	200	200	96			144		
	10"	250	200	128			160		
	12"	300	200	192			192		
	14"	350	200	224			224		
	16"	400	200	128	160		96	192	
	18"	450	200	160	160		128	192	
	20"	500	200	192	192		160	224	
	22"	550	200	192	224		192	224	
	24"	600	200	128	160	192	192	160	128
	26"	650	200	160	160	192	192	192	160
	28"	700	200	192	192	192	192	192	192
	30"	750	200	192	192	192	192	224	192
	32"	800	200	224	224	224	224	224	224
	34"	850	200	224	224	224	224	224	224
	36"	900	200	256	256	256	256	256	256
	38"	950	200	256	288	288	256	288	288
	40"	1000	200	228	288	288	288	288	288

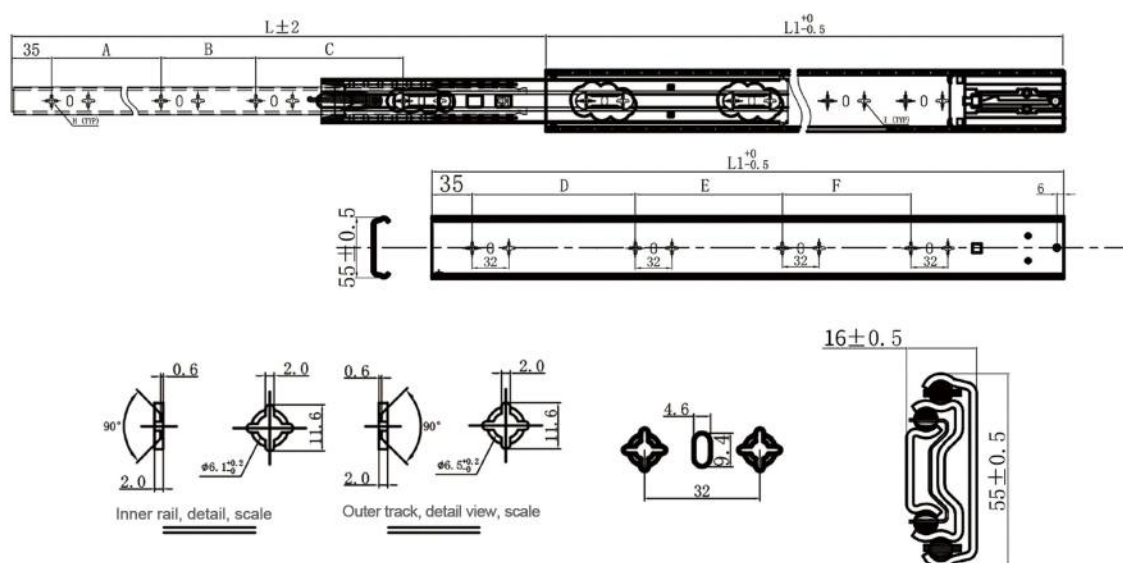


- Countersunk Mounting Holes
- Double-Row Steel Balls
- Electrolytic Steel Ball Cage
- Reinforced Damper

- Length: 300–800 mm (12"–32")
- Installation Clearance: 16 mm (+0.5 mm / -0)
- Maximum Load: 90 kg
- Extension: Full Extension
- Installation: Side Mounting / Detachable
- Surface Treatment: Blue Zinc / Black Zinc / E
- Material: Cold-Rolled Steel
- Material Thickness: 2.0 × 1.8 × 2.0 mm


-Application: File cabinets, cabinets, lockers, display cabinets, tool boxes, and other high-load wooden and steel drawers.

Features: Drawer and cabinet rails can be installed separately for easier installation and removal. The locking function prevents unintended drawer movement. Custom lengths and mounting-hole positions are available.

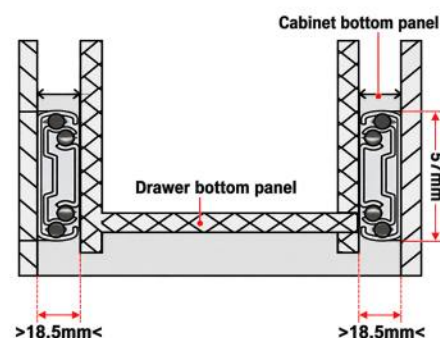

Product Model	SIZE	L	L1	A	B	C	D	E	F
B2055-16	12"	300	315	224			128		
	14"	350	365	128	128		160		
	16"	400	415	128	160		224		
	18"	450	465	160	160		156		
	20"	500	515	192	192		160	160	
	22"	550	565	192	224		192	160	
	24"	600	615	224	256		224	192	
	26"	650	665	256	256		256	224	
	28"	700	715	288	288		288	224	
	30"	750	765	224	224	192	192	192	160
32"	800	815	224	256	192	192	192	192	

MS600-HD2071-1

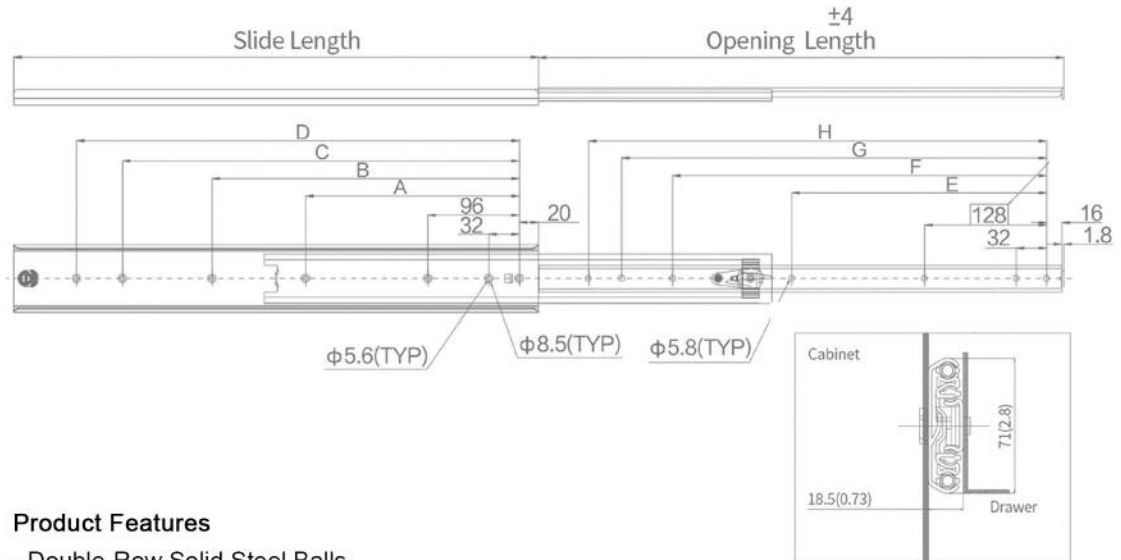

Product Features


- Double-Row Solid Steel Balls
- Detachable Snap-Fit Mechanism

Specification

- Length: 250–1200 mm (10"–48")
- Mounting Clearance: 18.5 mm (+0.5 mm / -0)
- Maximum Load: 125 kg
- Extension: Full Extension
- Mounting: Side Mounting
- Detachable: Yes
- Surface Treatment: Blue Zinc / Black Zinc / Electrophoresis
- Material: Cold-Rolled Steel
- Material Thickness: 2.0 × 2.0 × 2.0 mm


Application: File cabinets, kitchen cabinets, storage cabinets, display cabinets, tool boxes, and other high-load wooden and steel drawers.

Features: Drawer and cabinet rails can be mounted separately for easier installation and removal. The locking function prevents unintended drawer movement at full extension. Custom lengths, mounting-hole positions, and extended travel are available.

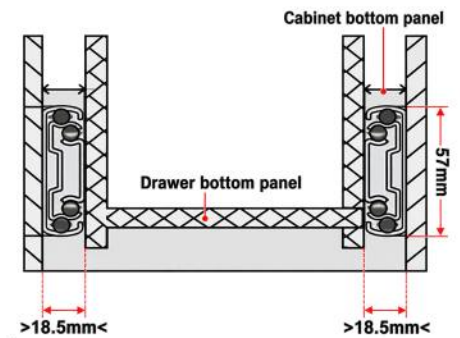

Product Model	SIZE	L	L1	荷重KG	A	B	C	D	E	F	G	H
A2071-01	10"	250	250	80	192				192			
	12"	300	250	90	160	224			192	256		
	14"	350	250	95	192	288			224	288		
	16"	400	250	100	192	320			256	352		
	18"	450	250	110	224	352			288	384		
	20"	500	250	120	224	384			192	320	448	
	22"	550	250	125	224	384	480		224	384	480	
	24"	600	250	125	224	384	512		224	384	512	
	26"	650	250	120	224	384	576		224	384	576	
	28"	700	250	115	256	416	608		256	416	608	640
	30"	750	250	110	256	448	672		288	448	672	704
	32"	800	250	105	288	480	704		288	480	704	736
	34"	850	250	100	288	512	768		320	512	768	800
	36"	900	250	95	320	576	832		320	576	768	832
	38"	950	250	90	320	576	864		320	576	864	896
	40"	1000	250	85	320	576	768	928	320	576	768	928
	42"	1050	250	80	320	576	768	960	320	608	768	992
	44"	1100	250	75	320	576	768	1024	320	608	768	1024
	46"	1150	250	70	320	576	832	1088	320	640	832	1088
	48"	1200	250	70	320	576	832	1120	320	640	896	1120

A stainless steel pot sits on a mobile cart with a built-in oven. The cart has a white body and a stainless steel top. The oven is integrated into the side of the cart, with a handle and a viewing window. The cart is on wheels and has a red emergency stop button. The background shows a kitchen setting with wooden cabinets and a tiled wall.

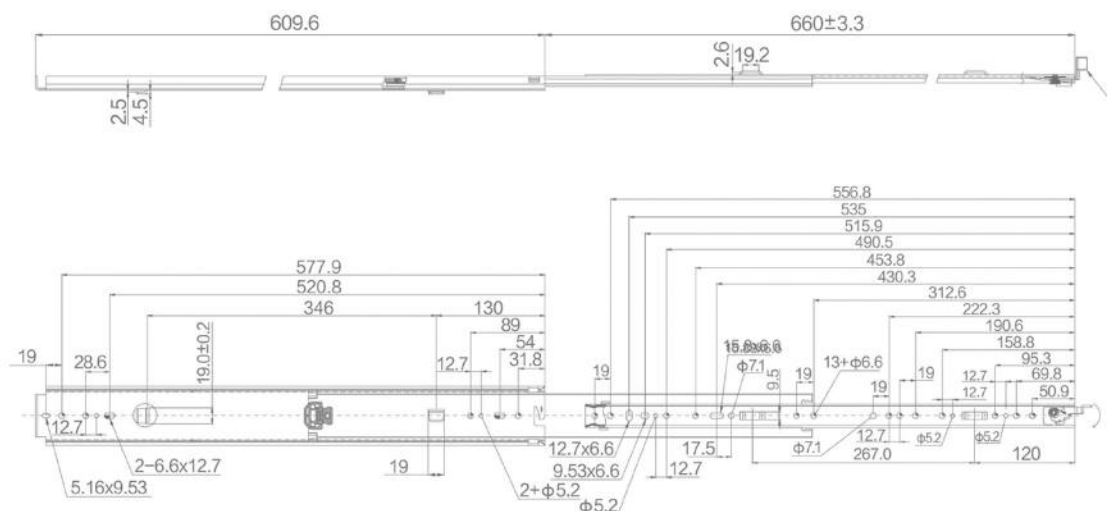


- Safety Lock
- Thickened Steel Construction
- Solid Steel Ball Bearings

- Length: 250–1200 mm (10"–48")
- Mounting Clearance: 18.5 mm (+0.5 mm)
- Maximum Load: 125 kg
- Extension: Full Extension
- Mounting: Side Mounting
- Detachable: Yes
- Surface Treatment: Blue Zinc / Black Zinc
- Material: Cold-Rolled Steel
- Material Thickness: 2.0 × 2.0 × 2.0 mm

Application: File cabinets, kitchen cabinets, storage cabinets, display cabinets, tool boxes, and other high-load wooden and steel drawers.



Features: Drawer and cabinet rails can be mounted separately for easier installation and removal. The locking function prevents unintended drawer movement at full extension.

Custom lengths, mounting-hole positions, and extended travel are available.

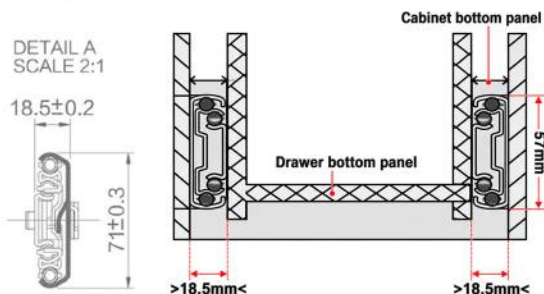

Product Model	SIZE	L	L1	荷重KG	A	B	C	D	E	F	G	H
C2071	10"	250	250	80	192				192			
	12"	300	250	90	160	224			192	256		
	14"	350	250	95	192	288			224	288		
	16"	400	250	100	192	320			256	352		
	18"	450	250	110	224	352			288	384		
	20"	500	250	120	224	384			192	320	448	
	22"	550	250	125	224	384	480		224	384	480	
	24"	600	250	125	224	384	512		224	384	512	
	26"	650	250	120	224	384	576		224	384	576	
	28"	700	250	115	256	416	608		256	416	608	640
	30"	750	250	110	256	448	672		288	448	672	704
	32"	800	250	105	288	480	704		288	480	704	736
	34"	850	250	100	288	512	768		320	512	768	800
	36"	900	250	95	320	576	832		320	576	768	832
	38"	950	250	90	320	576	864		320	576	864	896
	40"	1000	250	85	320	576	768	928	320	576	768	928
	42"	1050	250	80	320	576	768	960	320	608	768	992
	44"	1100	250	75	320	576	768	1024	320	608	768	1024
46"	1150	250	70	320	576	832	1088	320	640	832	1088	
48"	1200	250	70	320	576	832	1120	320	640	896	1120	

MS600-HD2076-A

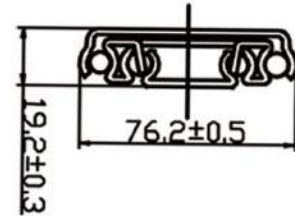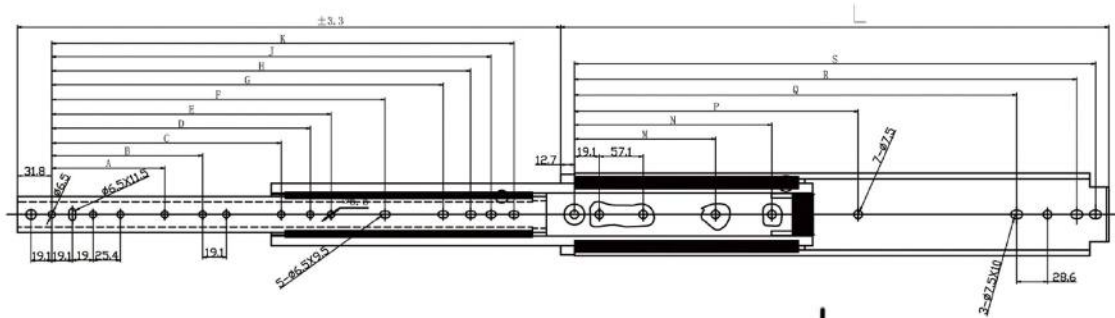


Product Features

- Silent Anti-Collision Buffer
- Double-Row Heavy-Duty Steel Ball Bearings


Specification

- Length: 254–1524 mm (10"–60")
- Installation Clearance: 19.5 mm (+2.5 mm / -0)
- Maximum Load: 228 kg
- Extension: Full Extension
- Installation: Side Mounting / Detachable
- Surface Treatment: Blue Zinc / Black Zinc / Electrophoresis
- Material: Cold-Rolled Steel
- Material Thickness: 2.5 × 2.2 × 2.5 mm
- Application: File cabinets, cabinets, lockers, display cabinets, tool boxes, and other high-load wooden and steel drawers.
- Features: Drawer and cabinet rails can be installed separately for easier installation and removal. The locking function prevents unintended drawer movement at full extension. Custom lengths and mounting-hole positions are available.

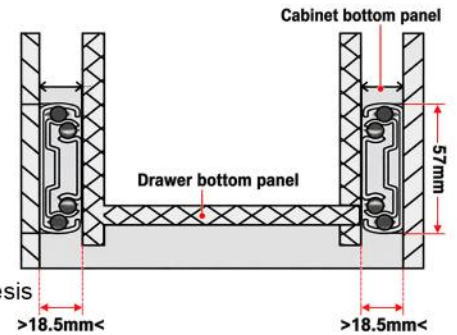

Product Model	SIZE	L	A	B	C	D	E	F	G	H	J	K	M	N	P	Q	R	S
A2576	10"	254							103.1	128.5	147.6	166.6				152.4	209.6	228.6
	12"	304.8							153.9	179.3	198.4	217.4				203.2	260.4	279.4
	14"	355.6							204.7	230.1	249.2	268.2				254	311.2	330.2
	16"	406.4	127						255.5	280.9	299.9	319				304.8	361.9	381
	18"	457.2	127					246.1	306.3	331.7	350.8	369.8				355.6	412.8	431.8
	20"	508	127	190.5				296.9	357.1	382.5	401.6	420.6				406.4	463.6	482.6
	22"	558.8	127	190.5				347.7	407.9	433.3	452.4	471.4				457.2	514.4	533.4
	24"	609.6	127	190.5				398.5	458.7	484.1	503.2	522.2				508	565.2	584.2
	26"	660.4	127	190.5				449.3	509.5	534.9	553.9	573				558.8	615.9	635
	28"	711.2	127	190.5				500.1	560.3	585.7	604.8	623.8				609.6	666.8	685.8
	30"	762	127	190.5	368.3			550.9	611.1	636.5	655.6	674.6	234.9		501.6	660.4	717.6	736.6
	32"	812.8	127	190.5	368.3			601.7	661.9	687.3	706.4	725.4	234.9	393.7	552.5	711.2	768.4	787.4
	34"	863.6	127	190.5	368.3	469.9		652.5	712.7	738.1	757.2	776.2	234.9	419.1	603.3	762	819.2	838.2
	36"	914.4	127	190.5	368.3	520.7		703.3	763.5	788.9	808	827	234.9	444.5	654.1	812.8	870	889
	38"	965.2	127	190.5	368.3	520.7		754.1	814.3	839.7	858.8	877.8	234.9	469.9	704.9	863.6	920.8	939.8
	40"	1016	127	190.5	368.3	520.7		804.9	865.1	890.5	909.6	928.6	234.9	495.3	755.7	914.4	971.6	990.6
	42"	1066.8	127	190.5	368.3	520.7	723.9	855.7	915.9	941.3	960.4	979.4	234.9	520.7	806.5	965.2	1022.4	1041.4
	44"	1117.6	127	190.5	368.3	520.7		906.5	966.7	992.1	1011.2	1030.2	234.9	546.1	857.3	1016	1073.2	1092.2
	46"	1168.4	127	190.5	368.3	520.7		957.3	1017.5	1042.9	1062	1081	234.9	571.5	908.1	1066.8	1124	1143
	48"	1219.2	127	190.5	368.3	520.7	825.5	1008.1	1068.3	1093.7	1112.8	1131.8	234.9	596.9	958.8	1117.6	1174.8	1193.8
	50"	1270	127	190.5	368.3	520.7	825.5	1058.9	1119.1	1144.5	1163.6	1182.6	234.9	596.9	958.8	1168.4	1225.6	1244.6
	52"	1320.8	127	190.5	368.3	520.7	825.5	1109.7	1169.9	1195.3	1214.4	1233.4	234.9	596.9	958.8	1219.2	1276.4	1295.4
	54"	1371.6	127	190.5	368.3	520.7	825.5	1160.5	1220.7	1246.1	1265.2	1284.2	234.9	596.9	958.8	1270	1327.2	1346.2
	56"	1422.4	127	190.5	368.3	520.7	825.5	1211.3	1271.5	1296.9	1316	1335	234.9	596.9	958.8	1320.8	1378	1397
	58"	1473.2	127	190.5	368.3	520.7	825.5	1262.1	1322.3	1347.7	1366.8	1385.8	234.9	596.9	958.8	1371.6	1428.8	1447.8
	60"	1524	127	190.5	368.3	520.7	825.5	1312.9	1373.1	1398.5	1417.6	1436.6	234.9	596.9	958.8	1422.4	1479.6	1498.6

MS600-HD2076

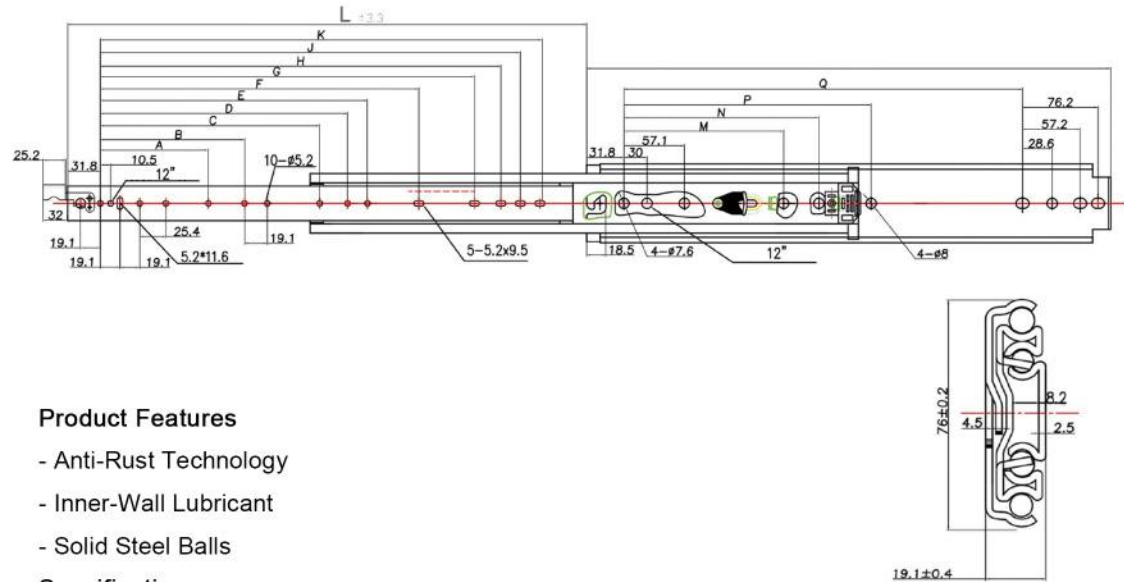


Product Features

- Anti-Rust Technology
- Inner-Wall Lubricant
- Solid Steel Balls

Specification

- Length: 304.8–1524 mm (12"–60")
- Installation Clearance: 19.2 mm (+2.5 mm / -0)
- Maximum Load: 228 kg
- Extension: Full Extension
- Installation: Side Mounting
- Detachable: No
- Surface Treatment: Blue Zinc / Black Zinc / Electrophores
- Material: Cold-Rolled Steel
- Material Thickness: 2.5 × 2.2 × 2.5 mm



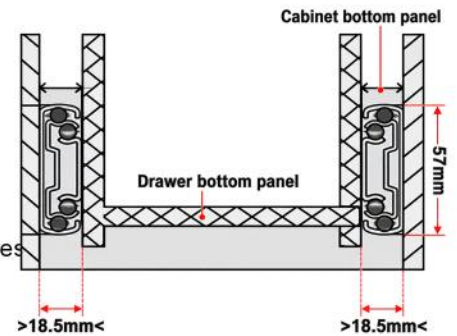


Application: Filing cabinets, cupboards, lockers, display cabinets, tool boxes, and other heavy-duty wooden and steel drawers.

Features: Non-detachable construction with an end-position locking function to prevent unintended drawer movement. Custom lengths and mounting-hole positions are available.

Product Model	SIZE	L	A	B	C	D	E	F	G	H	J	K	M	N	P	Q	R	S
C2576	12"	304.8							153.9	179.3	196.4	217.4				203.2	260.4	279.4
	14"	355.6							204.7	230.1	249.2	268.2				254	311.2	330.2
	16"	406.4	127						255.5	280.9	299.9	319				304.8	361.9	381
	18"	457.2	127					246.1	306.3	331.7	350.8	369.8				355.6	412.8	431.8
	20"	508	127	190.5				296.9	357.1	382.5	401.6	420.6				406.4	463.6	482.6
	22"	558.8	127	190.5				347.7	407.9	433.3	452.4	471.4				457.2	514.4	533.4
	24"	609.6	127	190.5				398.5	458.7	484.1	503.2	522.2				508	565.2	584.2
	26"	660.4	127	190.5				449.3	509.5	534.9	553.9	573				558.8	615.9	635
	28"	711.2	127	190.5				500.1	560.3	585.7	604.8	623.8				609.6	666.8	685.8
	30"	762	127	190.5	368.3			550.9	611.1	636.5	655.6	674.6	234.9		501.6	660.4	717.6	736.6
	32"	812.8	127	190.5	368.3			601.7	661.9	687.3	706.4	725.4	234.9	393.7	552.5	711.2	768.4	787.4
	34"	863.6	127	190.5	368.3	469.9		652.5	712.7	738.1	757.2	776.2	234.9	419.1	603.3	762	819.2	838.2
	36"	914.4	127	190.5	368.3	520.7		703.3	763.5	788.9	808	827	234.9	444.5	654.1	812.8	870	889
	38"	965.2	127	190.5	368.3	520.7		754.1	814.3	839.7	858.8	877.8	234.9	469.9	704.9	863.6	920.8	939.8
	40"	1016	127	190.5	368.3	520.7		804.9	865.1	890.5	909.6	928.6	234.9	495.3	755.7	914.4	971.6	990.6
	42"	1066.8	127	190.5	368.3	520.7	723.9	855.7	915.9	941.3	960.4	979.4	234.9	520.7	806.5	965.2	1022.4	1041.4
	44"	1117.6	127	190.5	368.3	520.7		906.5	966.7	992.1	1011.2	1030.2	234.9	546.1	857.3	1016	1073.2	1092.2
	46"	1168.4	127	190.5	368.3	520.7		957.3	1017.5	1042.9	1062	1081	234.9	571.5	908.1	1066.8	1124	1143
	48"	1219.2	127	190.5	368.3	520.7	825.5	1008.1	1068.3	1093.7	1112.8	1131.8	234.9	596.9	958.8	1117.6	1174.8	1193.8
	50"	1270	127	190.5	368.3	520.7	825.5	1058.9	1119.1	1144.5	1163.6	1182.6	234.9	596.9	958.8	1168.4	1225.6	1244.6
	52"	1320.8	127	190.5	368.3	520.7	825.5	1109.7	1169.9	1195.3	1214.4	1233.4	234.9	596.9	958.8	1219.2	1276.4	1295.4
	54"	1371.6	127	190.5	368.3	520.7	825.5	1160.5	1220.7	1246.1	1265.2	1284.2	234.9	596.9	958.8	1270	1327.2	1346.2
	56"	1422.4	127	190.5	368.3	520.7	825.5	1211.3	1271.5	1296.9	1316	1335	234.9	596.9	958.8	1320.8	1378	1397
	58"	1473.2	127	190.5	368.3	520.7	825.5	1262.1	1322.3	1347.7	1366.8	1385.8	234.9	596.9	958.8	1371.6	1428.8	1447.8
	60"	1524	127	190.5	368.3	520.7	825.5	1312.9	1373.1	1398.5	1417.6	1436.6	234.9	596.9	958.8	1422.4	1479.6	1498.6

MS600-HD1076-2

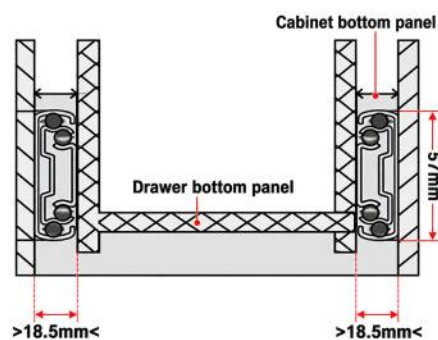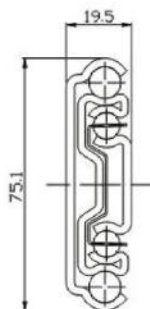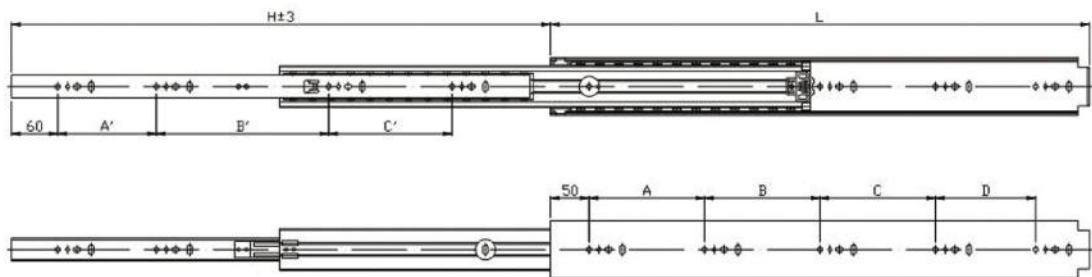

Product Features


- Anti-Rust Technology
- Inner-Wall Lubricant
- Solid Steel Balls

Specification

- Length: 10"-60"
- Height: 75.1 mm
- Side Clearance: 19.5 mm
- Load Capacity: 227 kg
- Surface Treatment: Clear Zinc Plating / Yellow Zinc Plating / Black E-Coating
- Packing: 4 Sets / Carton (No Screws)

Product Model	SIZE	L	A	B	C	D	A'	B'	C'	H
1076-02	14"	350	192				192			350
	16"	400	224				224			400
	18"	450	192	128			256			450
	20"	500	224	160			288			500
	22"	550	256	160			352			550
	24"	600	256	192			288	128		600
	26"	650	128	192	192		320	160		650
	28"	700	160	192	192		128	224	160	700
	30"	750	160	224	224		160	256	160	750
	32"	800	192	224	224		160	256	192	800
	34"	850	192	256	224		160	320	192	850
	36"	900	192	288	224		160	352	192	900
	38"	950	192	288	256		160	352	256	950
	40"	1000	192	256	224	160	192	352	256	1000

MS600-HD1076


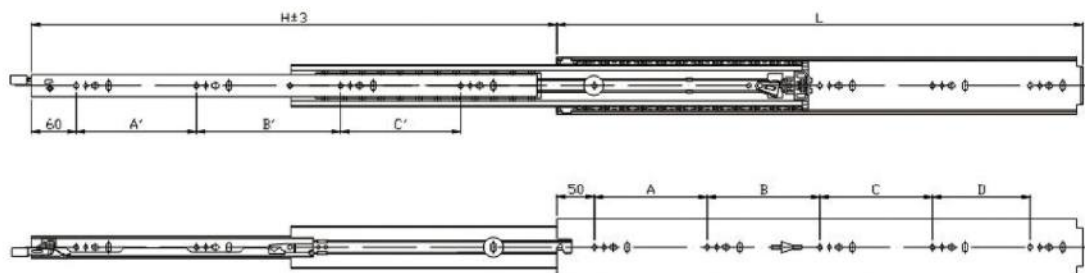


Product Features


- Anti-Rust Technology
- Inner-Wall Lubricant
- Solid Steel Balls

Specification

- Length: 10"-60"
- Height: 75.1 mm
- Side Clearance: 19.5 mm
- Load Capacity: 227 kg
- Surface Treatment: Clear Zinc Plating / Yellow Zinc Plating / Black E-Coating
- Packing: 4 Sets / Carton (No Screws)

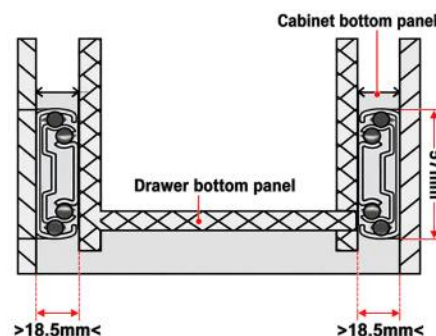

Product Model	SIZE	L	A	B	C	D	A'	B'	C'	H
1076-023S	14"	350	224				192			350
	16"	400	224				224			400
	18"	450	192	128			256			450
	20"	500	224	160			288			500
	22"	550	256	160			352			550
	24"	600	256	192			288	128		600
	26"	650	128	192	192		320	160		650
	28"	700	160	192	192		128	224	160	700
	30"	750	160	224	224		160	256	160	750
	32"	800	192	224	224		160	256	192	800
	34"	850	192	256	224		160	320	192	850
	36"	900	192	288	224		160	352	192	900
	38"	950	192	288	256		160	352	256	950
	40"	1000	192	256	224	160	192	352	256	1000

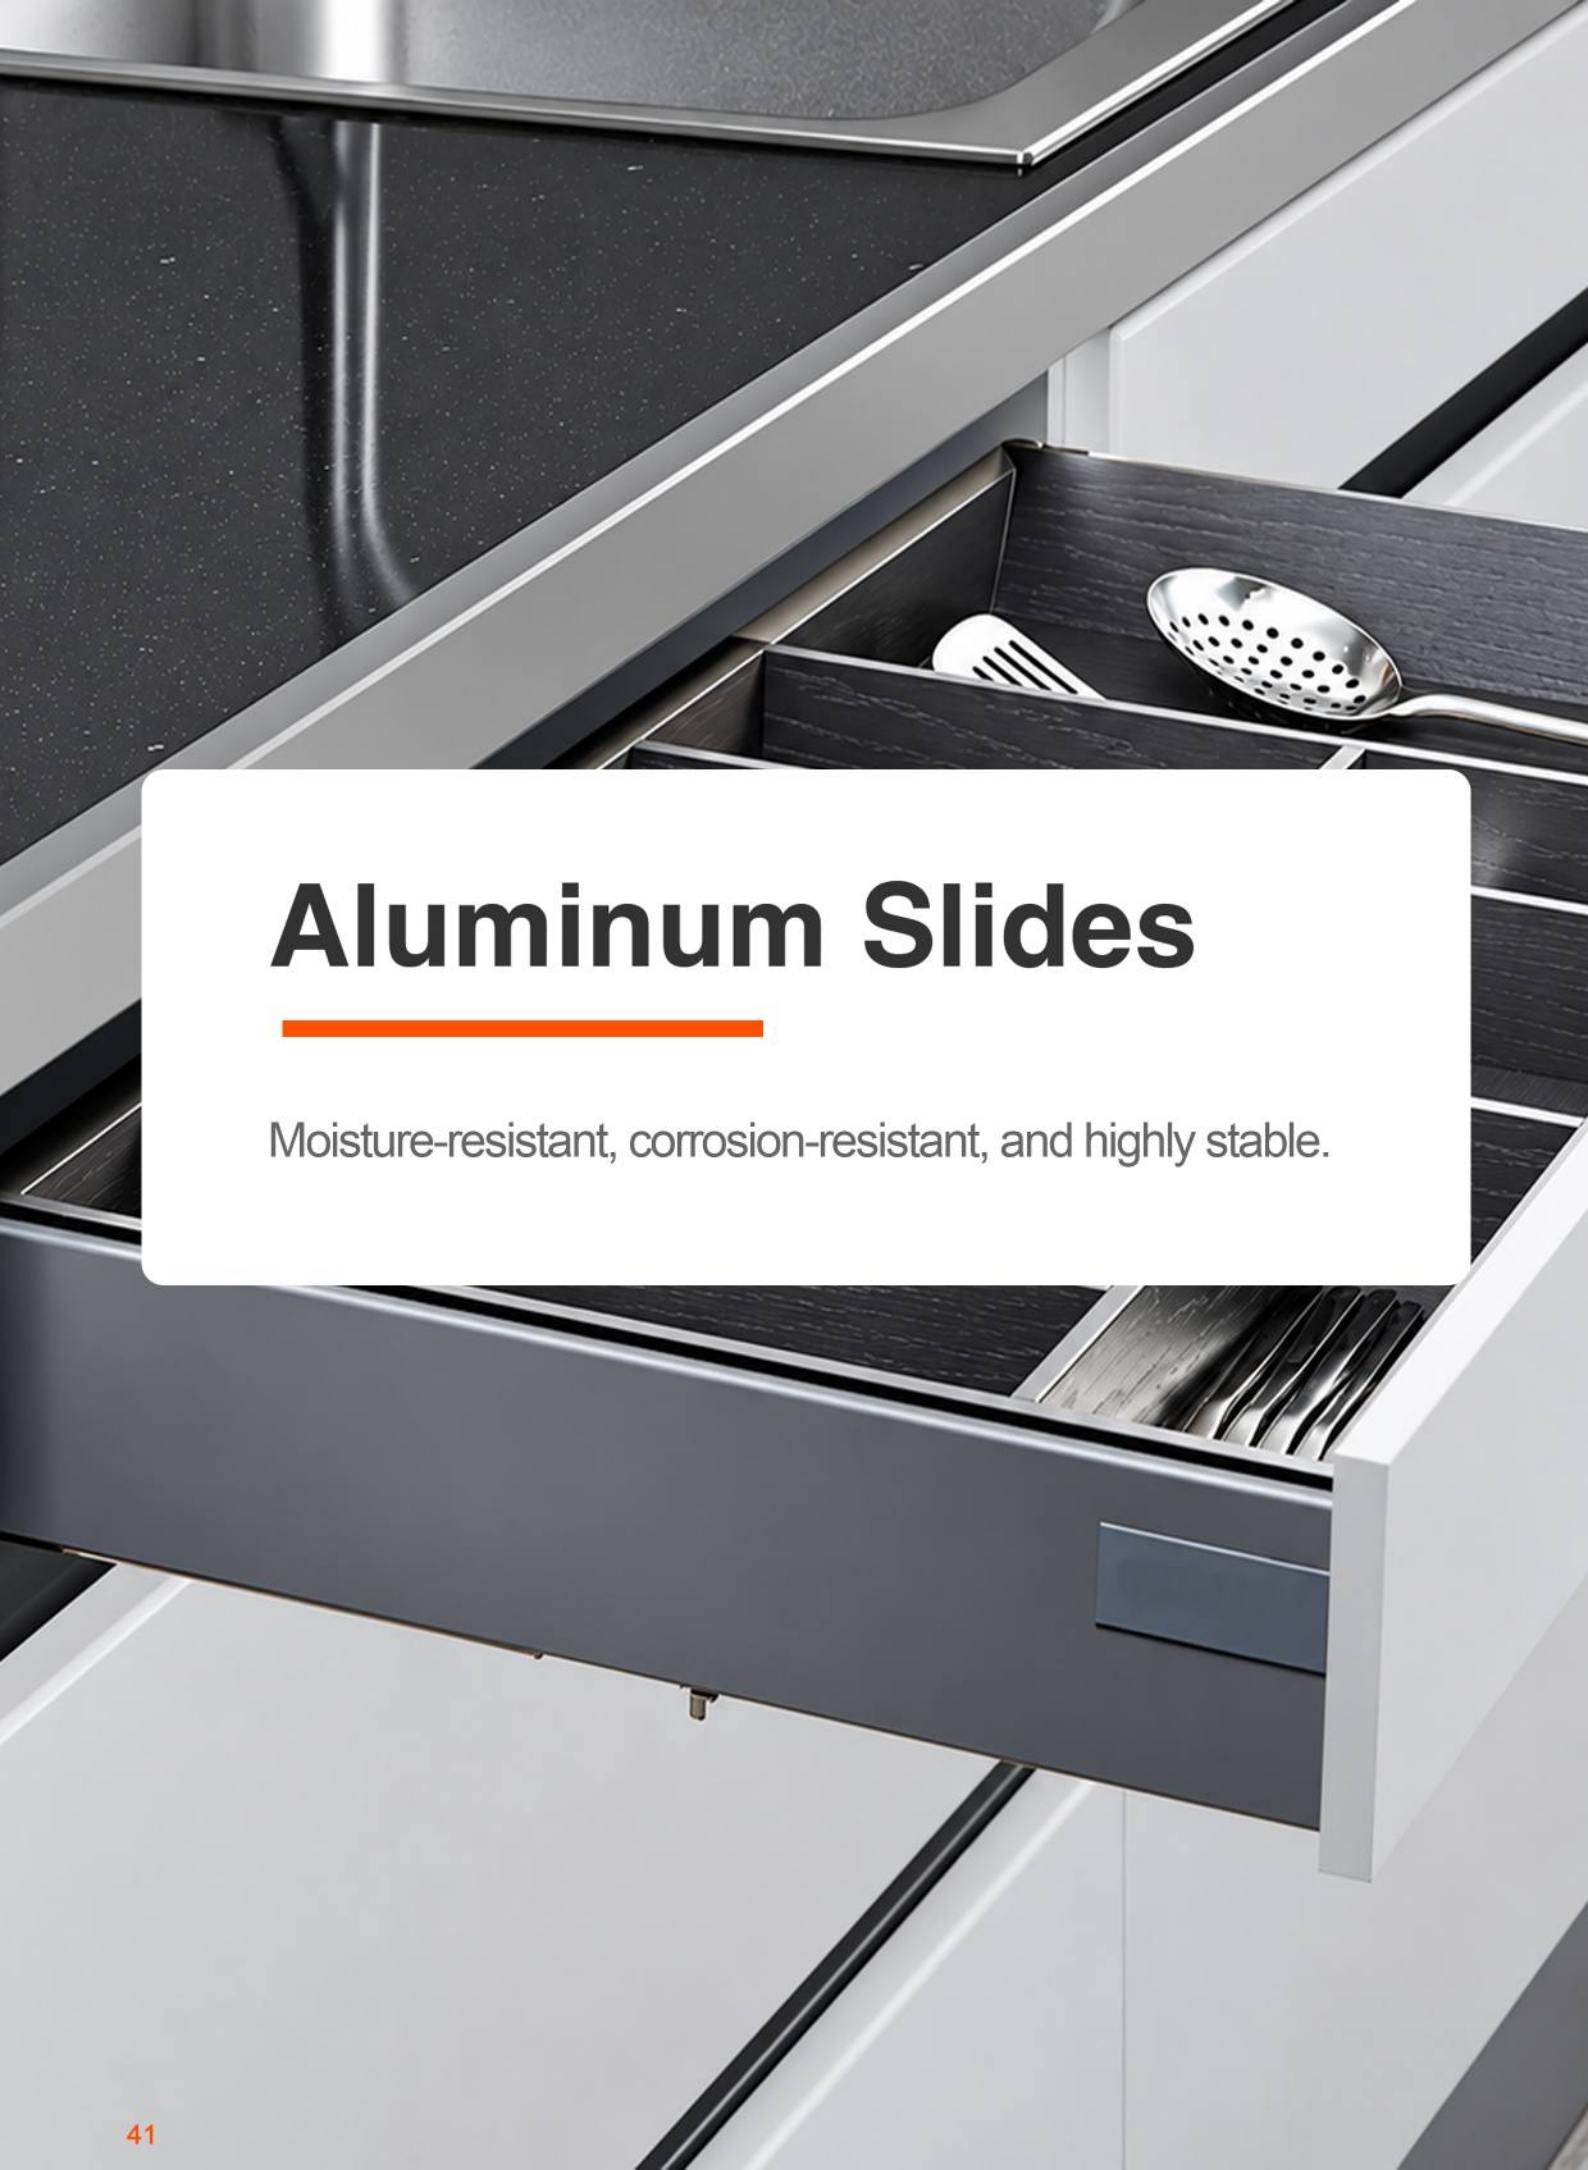

Aluminum Slides


Moisture-resistant, corrosion-resistant, and highly stable.

MS600-AL2801




Specification

- Length: 2"-22" (200 mm-550 mm)
- Mounting clearance: 8 mm (+0.5 mm / -0)
- Type of mounting: Side mounting
- Max. Load: 20 kg
- Surface treatment: Anodized
- Material: AL6063

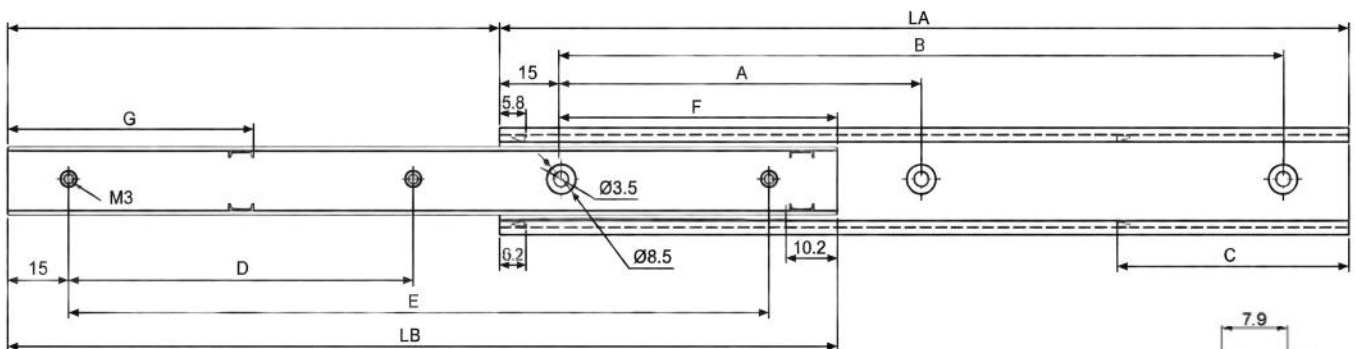

Through The Internal Recessed Design And The High-intensity Plastic Coordination Of The Mid-rail, The Order Is Pulled Out During The Drawer Development Process

To Ensure The Stability And Safety Of The Drawer.




Product Model	Slide Length	Opening Length	Hole spacing(mm)			
			A	B	D	E
HZP-AL200801	100(4")	60	70		70	
	150 (6")	90	120		120	
	200(8")	120	85	170	85	170
	250(10")	150	110	220	110	220
	300(12")	180	135	270	135	270
	350(14")	210	160	320	160	320
	400(16")	240	185	370	185	370
	450(18")	270	210	420	210	420
	500(20")	300	235	470	235	470
	550(22")	330	260	520	260	520
	600(24")	360	285	570	285	570

MS600-AL2802



Specification


- Length: 2"-22" (200 mm-550 mm)
- Mounting clearance: 16 mm (+0.5 mm / -0)
- Type of mounting: Side mounting
- Max. Load: 20 kg
- Surface treatment: Anodized
- Material: AL6063

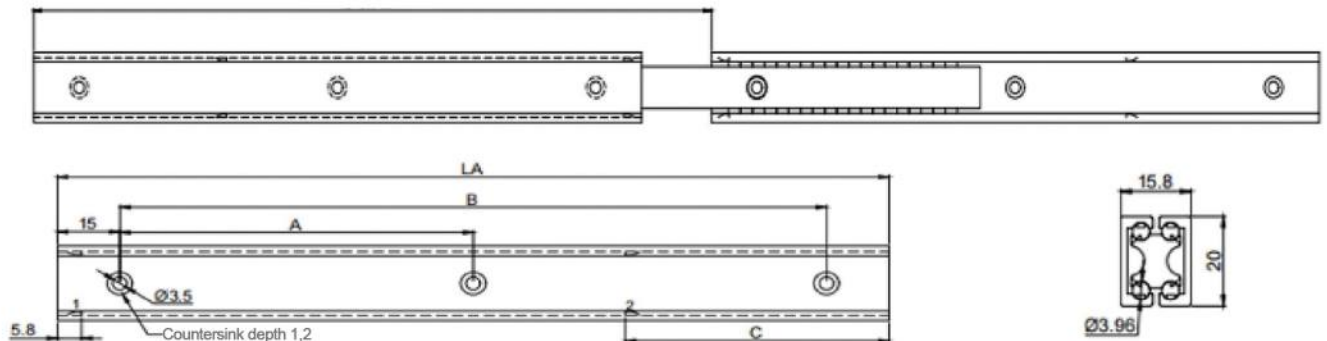

Through The Internal Recessed Design And The High-intensity Plastic Coordination Of The Mid-rail, The Order Is Pulled Out During The Drawer Development Process

To Ensure The Stability And Safety Of The Drawer.

Installation Diagram




Product Model	Slide Length	Opening Length	Hole spacing(mm)	
			A	B
HZF-AL200802	100(4")	100	70	
	150 (6")	157	120	
	200(8")	223	85	170
	250(10")	273	110	220
	300(12")	345	135	270
	350(14")	404	160	320
	400(16")	425	185	370
	450(18")	525	210	420
	500(20")	535	235	470

MS600-AL1606




Specification

- Length: 2"-6" (200 mm-550 mm)
- Mounting clearance: 6 mm (+0.5 mm / -0)
- Type of mounting: Side mounting
- Max. Load: 5 kg
- Surface treatment: Anodized
- Material: AL6082

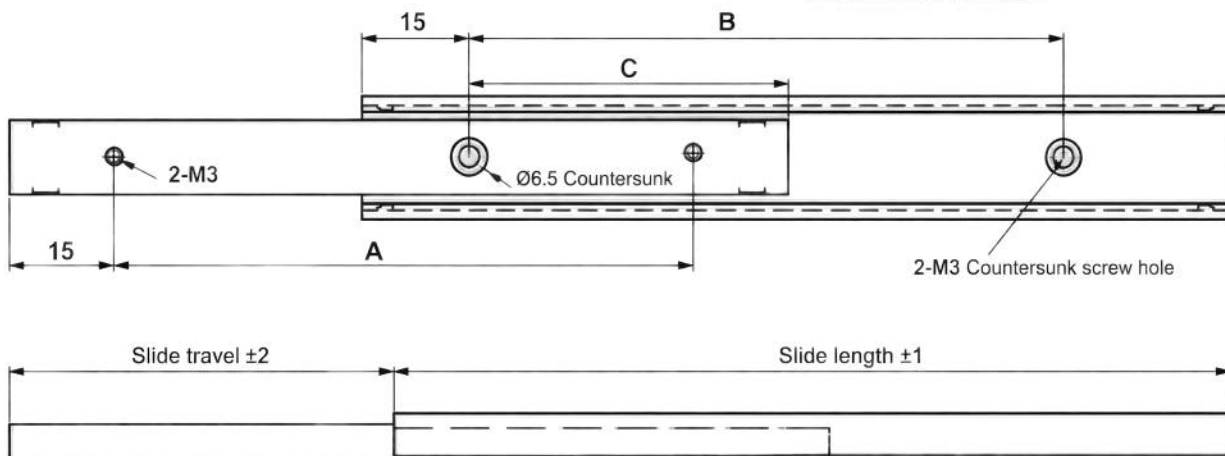


Through The Internal Recessed Design And The High-intensity Plastic Coordination Of The Mid-rail, The Order Is Pulled Out During The Drawer Development Process To Ensure The Stability And Safety Of The Drawer.

Installation Diagram





Product Model		Slide Travel	A (mm)	B (mm)	C (mm)	Load Capacity/pari	Weight (kg/Pcs)
No.	Slide Length						
HZF-AL1606	60	30	30	30	25	5.1kgf	0.02
	70	40	40	40			0.03
	90	50	60	60			0.04
	100	60	70	70			0.05

MS600-AL3517

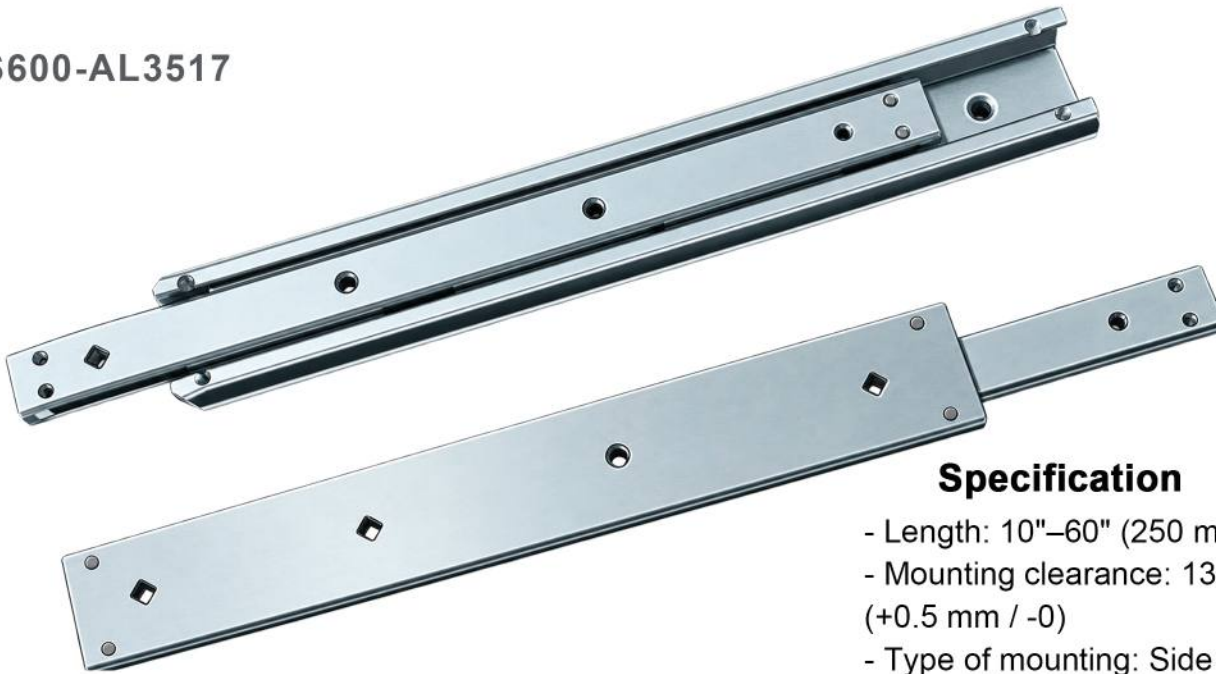

Specification

- Length: 10"-60" (250 mm-1500 mm)
- Mounting clearance: 13/17/22 mm (+0.5 mm / -0)
- Type of mounting: Side mounting
- Max. Load: 20 kg
- Surface treatment: Anodized
- Material: Steel/AL7055

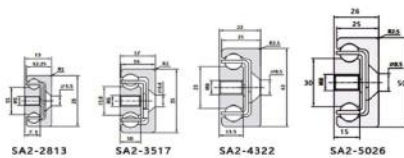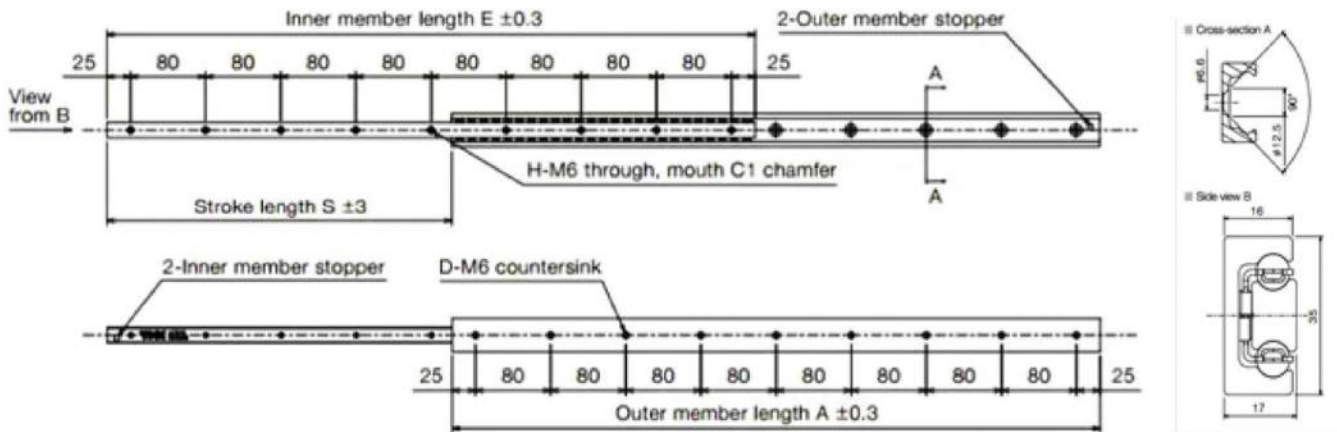

Installation Diagram


Model	Stroke Length S	Length A	Inner rail length	Mounting hole		Permissible Load N/set	Weight kg/set
				D	H		
A3517-210L	128.7	210	210	3	3	5,150	1.33
A3517-290L	157.9	290	290	4	4	7,990	1.87
A3517-370L	199.8	370	370	5	5	8,610	2.40
A3517-450L	254.4	450	450	6	6	7,970	2.90
A3517-530L	283.6	530	530	7	7	9,320	3.44
A3517-610L	325.5	610	610	8	8	9,540	3.97
A3517-690L	367.4	690	690	9	9	9,740	4.50

MS600-AL7046/9046




Specification

- Length: 10"-60" (250 mm-1500 mm)
- Mounting clearance: 27 mm (+0.5 mm / -0)
- Type of mounting: Side mounting
- Max. Load: 20 kg
- Surface treatment: Anodized
- Material: AL + steel7055+sus430

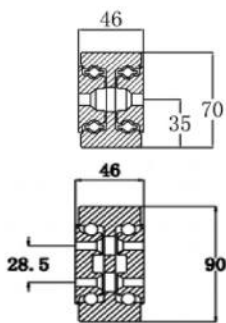

Installation Diagram

±4 Opening Length

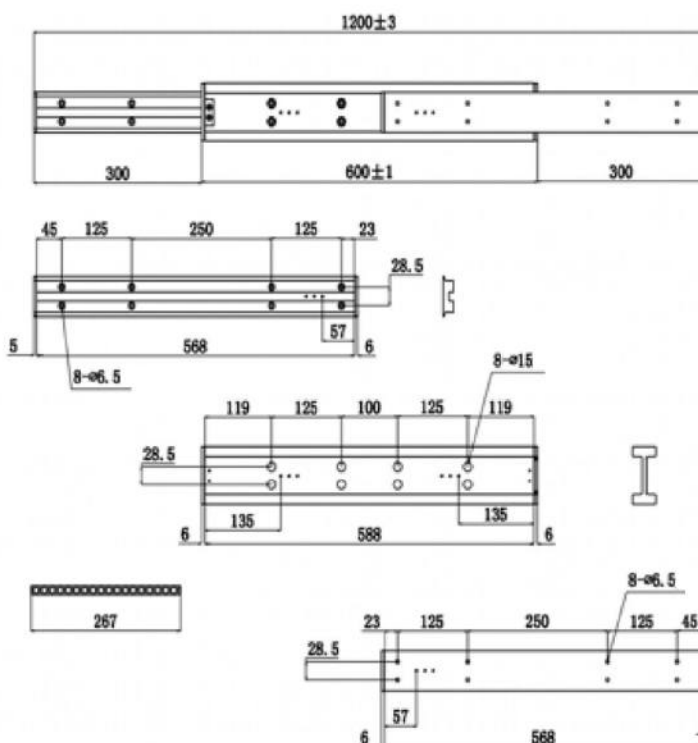


Slide Length (mm)	Slide Travel (mm)	Load Capacity /pair(kg)	Weight kg/set
500	500	1000	9.0
550	550	975	9.9
600	600	950	10.8
650	650	925	11.7
700	700	900	12.6
750	750	875	13.5
800	800	850	14.4
900	900	800	16.2
1000	1000	750	18
1100	1100	700	19.8
1200	1200	650	21.6
1300	1300	600	23.4
1400	1400	550	25.2
1500	1500	500	27.0
1600	1600	450	28.8
1700	1700	400	30.6
1800	1800	350	32.4
2000	2000	250	36.0

MS600-AL8027




Specification

- Length: 10"-60" (250 mm–1500 mm)
- Mounting clearance: 27 mm (+0.5 mm / -0)
- Type of mounting: Side mounting
- Max. Load: 20 kg
- Surface treatment: Anodized
- Material: AL 7075



Installation Diagram

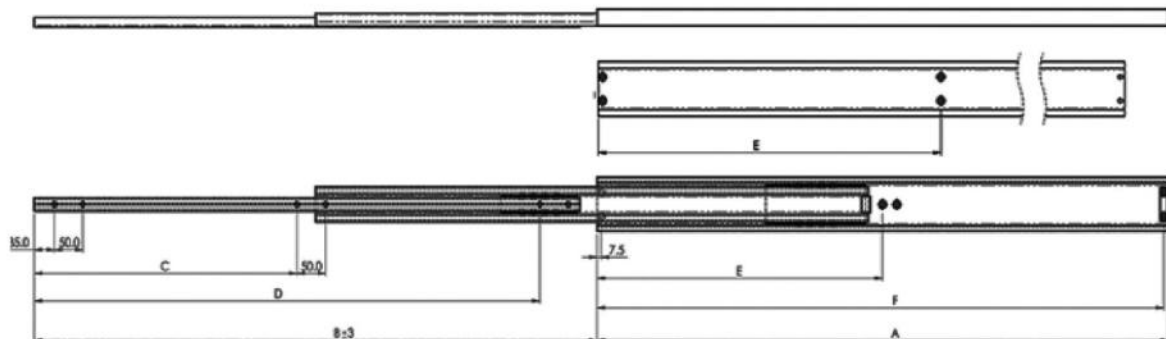



Part Number	Installation Length "A"	Extension Length "B"	Load Per Pair (kg)	Drill Table			
				"C"	"D"	"E"	"F"
HZF8027. 0300	300	285	250		185	150	292.5
HZF8027. 0350	350	335	260		235	175	342.5
HZF8027. 0400	400	385	270		285	200	392.5
HZF8027. 0450	450	435	280		335	225	442.5
HZF8027. 0500	500	485	300		385	250	492.5
HZF8027. 0550	550	535	320	235	435	275	542.5
HZF8027. 0600	600	585	330	260	485	300	592.5
HZF8027. 0650	650	635	315	285	535	325	642.5
HZF8027. 0700	700	685	300	310	585	350	692.5
HZF8027. 0750	750	735	290	335	635	375	742.5
HZF8027. 0800	800	785	280	360	685	400	792.5
HZF8027. 0850	850	835	270	385	735	425	842.5
HZF8027. 0900	900	885	260	410	785	450	892.5
HZF8027. 0950	950	935	250	435	835	475	942.5
HZF8027. 1000	1000	985	240	460	885	500	992.5
HZF8027. 1200	1200	1185	200	560	1085	600	1192.5
HZF8027. 1500	1500	1485	130	710	1385	750	1492.5



Stainless Steel Slides

Suitable for humid, high-temperature, and corrosive environments.

MS600-S4510

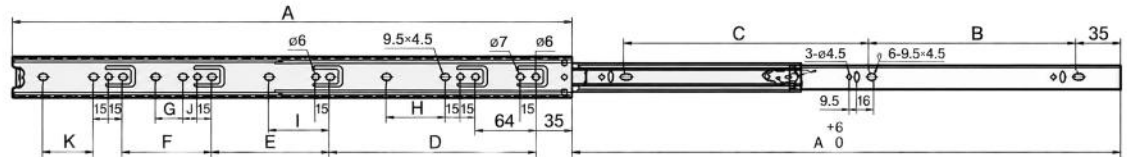

Thickness Range

NO.	Wood thickness
①	1.0mm
②	1.0mm
③	1.0mm

Product Features: Adjustable installation clearance; quick-release mechanism; shock-absorbing ball-bearing strips; locking mechanism to prevent the drawer from sliding open automatically.

Surface Finish: Brushed, polished.



Material: SUS201, SUS304 stainless steel.

Width: 45 mm

Applications: Medium-duty dish sterilizers, dish cabinets, etc.; suitable for humid, high-temperature, and corrosive environments (rust-resistant and durable); also suitable for various applications requiring full extension and a load capacity of up to 25 kg.

LS4510-250	250	-	-	247	64	96
LS4510-300	300	-	-	297	96	128
LS4510-350	350	64	-	347	96	160
LS4510-400	400	96	-	397	128	192
LS4510-450	450	96	64	447	128	224
LS4510-500	500	128	64	497	160	256
LS4510-550	550	192	64	547	224	224
LS4510-600	600	224	64	597	224	288
SIZE	A	B	C	D	E	F

MS600-S4510F

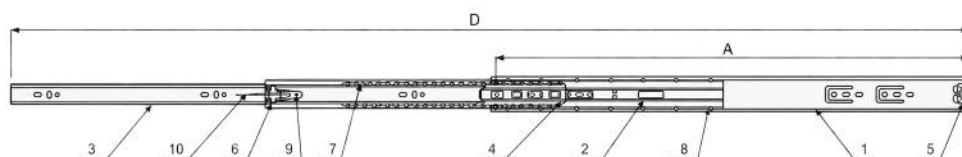

Thickness Range	
NO.	Wood thickness
①	1.0mm
②	1.0mm
③	1.0mm

Recommended applications: mid-duty dishware disinfector, cupboard, etc., suitable for damp, hot and corrosive environment, never get rusty; or for any applications requiring 40kg load or less and requiring full extension.

Product features: fine adjustment of gap is possible when installing, quick separation mechanism, vibration prevention ball strip for absorbing impulsive force, and mechanism to prevent drawer from springing out.

Installation method: side installation. 12.8 +0.2/-0 mm



Finishing: sanded, polished.

Material: SUS201, SUS304 stainless steel.

No.	Name	Size	Material	Qty	Remark
1	Outer rail		SUS201/304 stainless steel	1	According to order requirements
2	Middle rail		SUS201/304 stainless steel	1	According to order requirements
3	Inner rail		SUS201/304 stainless steel	1	According to order requirements
4	Ball	0.5	SUS201/304 stainless steel	1	According to order requirements
5	Molding piece (M type)	32.7x22.8x9.2	POM/PA	1	
6	Steel ball	Φ4.76	Steel		According to standard
7	Ball retainer strip		PP	2	According to standard
8	Rivet	3.2x5	Aluminum	1	
9	Small fish piece	63.2x19.4x3.1	POM/PA	1	
10	Stopper				

SIZE	A	D	Add-on length (mm)	Number of balls
250	250		110	3 sections
300	300		150	4 sections
350	350	670	175	5 sections
400	400	770	200	6 sections
450	450	870	225	7 sections
500	500	970	250	8 sections
550	550	1070	275	9 sections
600	600	1170	150x2	10 sections

MS600-S4510H

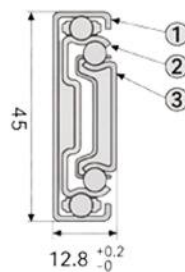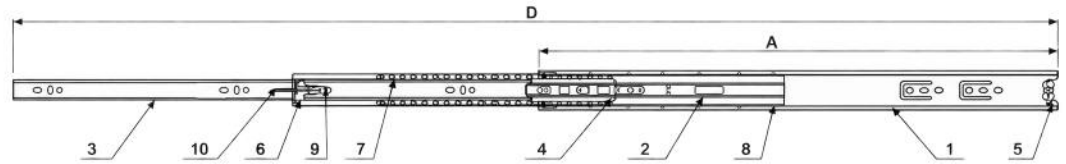

Thickness Range	
NO.	Wood thickness
①	1.0mm
②	1.0mm
③	1.0mm



Recommended applications: mid-duty dishware disinfector, cupboard, etc., suitable for damp, hot and corrosive environment, never get rusty; or for any applications requiring 40kg load or less and requiring full extension.

Product features: fine adjustment of gap is possible when installing, quick separation mechanism, vibration prevention ball strip for absorbing impulsive force, and mechanism to prevent drawer from springing out.

Installation method: side installation. 12.8 +0.2/-0 mm



Finishing: sanded, polished.

Material: SUS201, SUS304 stainless steel.

No.	Name	Size	Material	Qty	Remark
1	Outer rail		SUS201/304 stainless steel	1	According to order requirements
2	Middle rail		SUS201/304 stainless steel	1	According to order requirements
3	Inner rail		SUS201/304 stainless steel	1	According to order requirements
4	Ball	0.5	SUS201/304 stainless steel	1	According to order requirements
5	Molding piece (M type)	32.7x22.8x9.2	POM/PA	1	
6	Steel ball	Φ4.76	Steel		According to standard
7	Ball retainer strip		PP	2	According to standard
8	Rivet	3.2x5	Aluminum	1	
9	Small fish piece	63.2x19.4x3.1	POM/PA	1	
10	Stopper				

SIZE	A	D	Add-on length (mm)	Number of balls (sections)
250	250		110	3
300	300		150	4
350	350	675	175	5
400	400	775	200	6
450	450	875	225	7
500	500	975	250	8
550	550	1075	275	9
600	600	1175	150x2	10

MS600-S4512

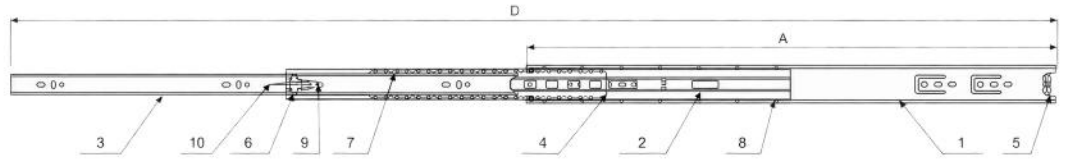

Thickness Range

Wood thickness

NO.	4512	4512A
①	1.2mm	1.0mm
②	1.2mm	1.0mm
③	1.2mm	1.2mm

Recommended applications: mid-duty dishware disinfector, cupboard, etc., suitable for damp, hot and corrosive environment, never get rusty; or for any applications requiring 45kg load or less and requiring full extension.

Product features: fine adjustment of gap is possible when installing, quick separation mechanism, vibration prevention ball strip for absorbing impulsive force, and mechanism to prevent drawer from springing out.



Installation method: side installation. 12.8 +0.2/-0 mm

Finishing: sanded, polished.

Material: SUS201, SUS304 stainless steel.

No.	Name	Size	Material	Qty	Remark	SIZE	A	D	Add-on length (mm)	Number of balls (sections)
1	Outer rail		SUS201/304 stainless steel	1	According to order requirements	250	250	502	110	3
2	Middle rail		SUS201/304 stainless steel	1	According to order requirements	300	300	602	150	4
3	Inner rail		SUS201/304 stainless steel	1	According to order requirements	350	550	702	175	5
4	Ball	0.5	SUS201/304 stainless steel	1	According to order requirements	400	400	802	200	6
5	Molding piece (M type)	32.7x22.8x9.2	POM/PA	1		450	450	902	225	7
6	Steel ball	φ 4.76	STEEL		According to standard	500	500	1002	250	8
7	Ball retainer strip		PP	2	According to standard	550	550	1102	275	9
8	Rivet	3.2x5	ALUMINA	1		600	600	1202	150x2	10
9	Small fish piece	63.2x19.4x3.1	POM/PA	1						

MS600-S3810

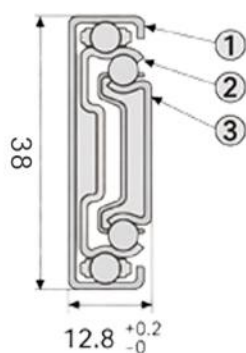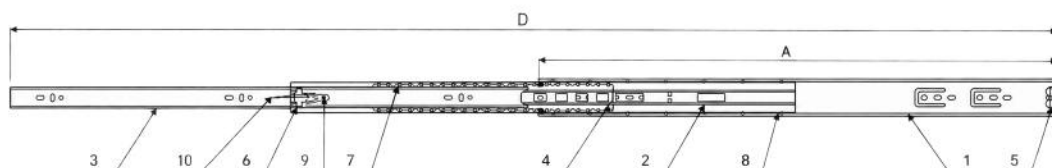

Thickness Range

NO.	Wood thickness
①	1.0mm
②	1.0mm
③	1.0mm

Recommended applications: mid-duty dishware disinfector, cupboard, etc., suitable for damp, hot and corrosive environment, never get rusty; or for any applications requiring 35kg load or less and requiring full extension.

Product features: fine adjustment of gap is possible when installing, quick separation mechanism, vibration prevention ball strip for absorbing impulsive force, and mechanism to prevent drawer from springing out.

Installation method: side installation. 12.8 +0.2/-0 mm

Finishing: sanded, polished.



Material: SUS201, SUS304 stainless steel.



No.	Name	Size	Material	Qty	Remark
1	Outer rail		SUS201/304 stainless steel	1	According to order requirements
2	Middle rail		SUS201/304 stainless steel	1	According to order requirements
3	Inner rail		SUS201/304 stainless steel	1	According to order requirements
4	Ball	0.5	SUS201/304 stainless steel	1	According to order requirements
5	Molding piece (M type)	32.7x22.8x9.2	POM/PA	1	
6	Steel ball	φ 4.76	STEEL		According to standard
7	Ball retainer strip		PP	2	According to standard
8	Rivet	3.2x5	ALUMINA	1	
9	Small fish piece	63.2x19.4x3.1	POM/PA	1	

SIZE	A	D	Add-on length (mm)	Number of balls (sections)
250	250	502	110	3
300	300	602	150	4
350	350	702	175	5
400	400	802	200	6
450	450	902	225	7
500	500	1002	250	8
550	550	1102	275	9
600	600	1202	150x2	10

MS600-S3810G

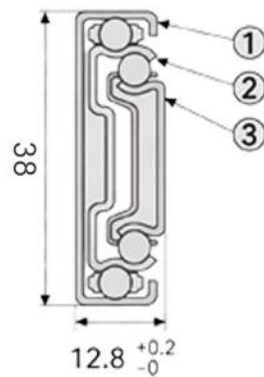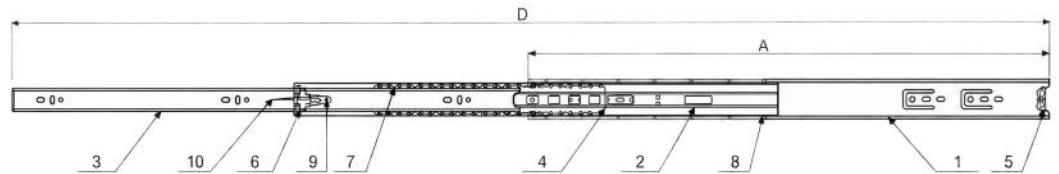

Thickness Range

NO.	Wood thickness
①	1.0mm
②	1.0mm
③	1.0mm

Recommended applications: mid-duty dishware disinfector, cupboard, etc., suitable for damp, hot and corrosive environment, never get rusty; or for any applications requiring 35kg load or less and requiring full extension.

Product features: fine adjustment of gap is possible when installing, quick separation mechanism, vibration prevention ball strip for absorbing impulsive force, and mechanism to prevent drawer from springing out.

Installation method: side installation. 12.8 +0.2/-0 mm



Finishing: sanded, polished.

Material: SUS201, SUS304 stainless steel.



No.	Name	Size	Material	Qty	Remark	SIZE	A	D	Add-on length (mm)	Number of balls (sections)
1	Outer rail		SUS201/304 stainless steel	1	According to order requirements	250	250	502	110	3
2	Middle rail		SUS201/304 stainless steel	1	According to order requirements	300	300	602	150	4
3	Inner rail		SUS201/304 stainless steel	1	According to order requirements	350	350	702	175	5
4	Ball	0.5	SUS201/304 stainless steel	1	According to order requirements	400	400	802	200	6
5	Molding piece (M type)	32.7x22.8x9.2	POM/PA	1		450	450	902	225	7
6	Steel ball	φ 4.76	STEEL		According to standard	500	500	1002	250	8
7	Ball retainer strip		PP	2	According to standard	550	550	1102	275	9
8	Rivet	3.2x5	ALUMINA	1		600	600	1202	150x2	10
9	Small fish piece	63.2x19.4x3.1	POM/PA	1						

MS600-S3510

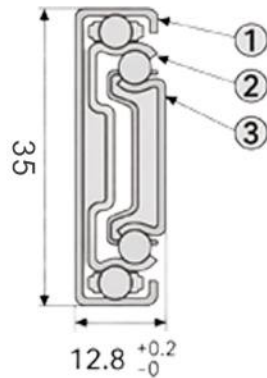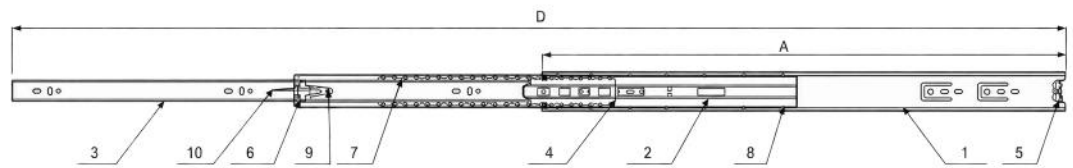

Thickness Range

Wood thickness

NO.	3510	3508
①	1.0mm	0.8mm
②	1.0mm	0.8mm
③	1.0mm	0.8mm

Recommended applications: mid-duty dishware disinfector, cupboard, etc., suitable for damp, hot and corrosive environment, never get rusty; or for any applications requiring 30kg load or less and requiring full extension.

Product features: fine adjustment of gap is possible when installing, quick separation mechanism, vibration prevention ball strip for absorbing impulsive force, and mechanism to prevent drawer from springing out.


Installation method: side installation. 12.8 +0.2/-0 mm

Finishing: sanded, polished.

Material: SUS201, SUS304 stainless steel.

No.	Name	Size	Material	Qty	Remark
1	Outer rail		SUS201/304 stainless steel	1	According to order requirements
2	Middle rail		SUS201/304 stainless steel	1	According to order requirements
3	Inner rail		SUS201/304 stainless steel	1	According to order requirements
4	Ball	0.5	SUS201/304 stainless steel	1	According to order requirements
5	Molding piece (M type)	32.7x22.8x9.2	POM/PA	1	
6	Steel ball	Φ 4.76	STEEL		According to standard
7	Ball retainer strip		PP	2	According to standard
8	Rivet	3.2x5	ALUMINA	1	
9	Small fish piece	63.2x19.4x3.1	POM/PA	1	

SIZE	A	D	Add-on length (mm)	Number of balls (sections)
250	250	502	110	3
300	300	602	150	4
350	350	702	175	5
400	400	802	200	6
450	450	902	225	7
500	500	1002	250	8
550	550	1102	275	9
600	600	1202	150x2	10

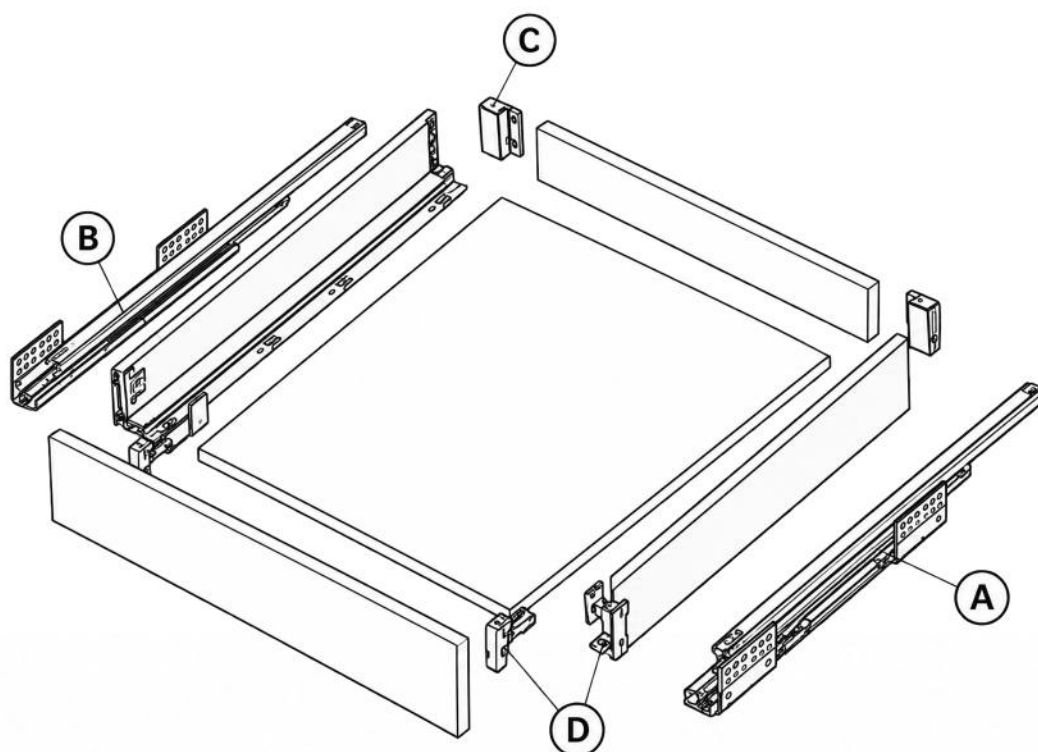

A N-707

Full Extension Slide Rail (Left/Right)

Load Capacity: 40KG

Lengths: 270/ 300/ 350/ 400/ 450/ 500/ 550MM




B N-707

Side Panel (Left/Right)

Available in four colors


Lengths: 270/ 300/ 350/ 400/ 450/ 500/ 550MM



C N-707

Rear Panel Connector (Left/Right)

Available in four colors




D N-707


Front Connector




Installation indication

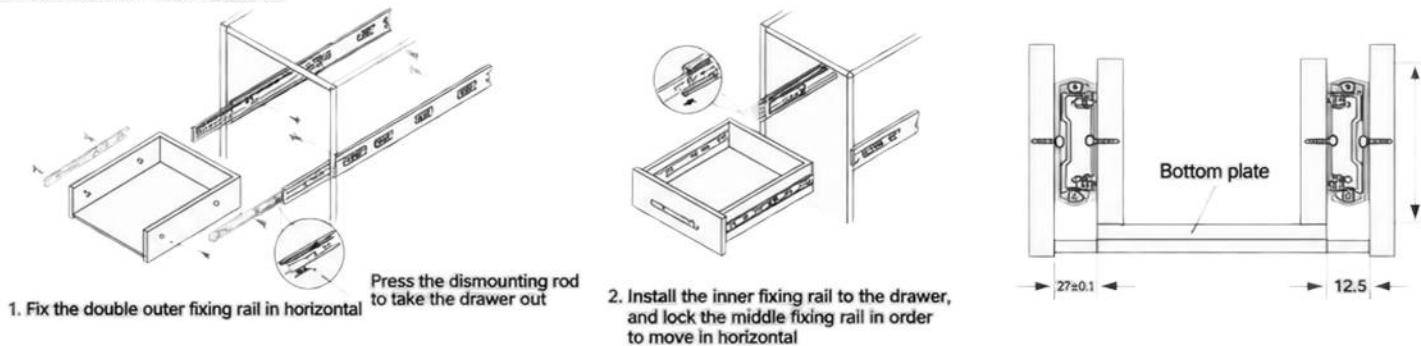

Installation method

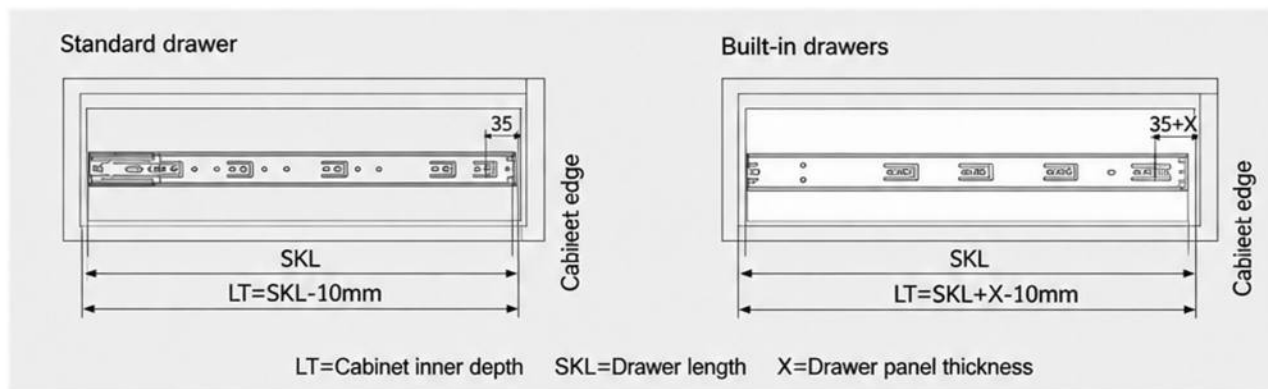

Installation instructions

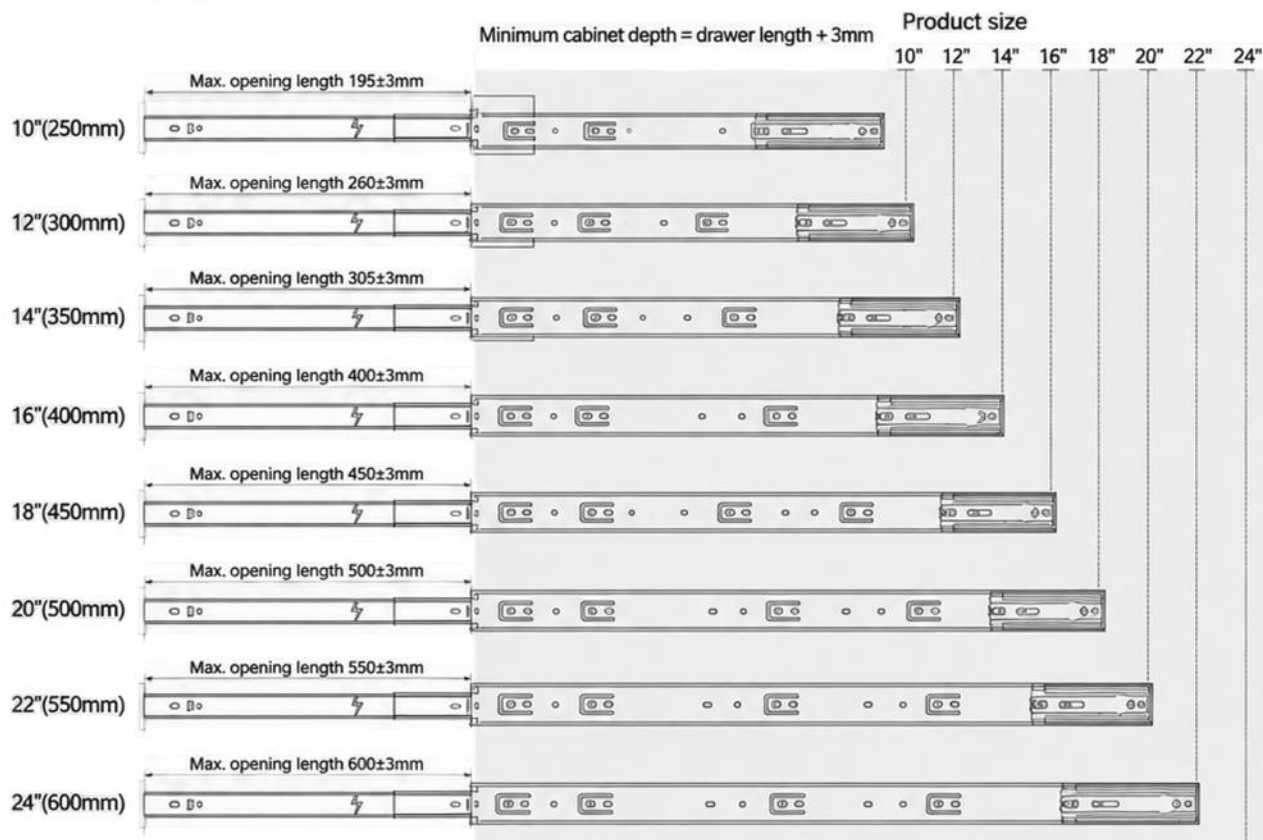

MINEON Product Features

- 1 The slide is installed in the middle of the drawer side panel
- 2 The slide slides into the end and locks quietly in place
- 3 Easy installation and the drawer can be removed by lifting the release lever
- 4 Equipped with a special anti-drop hook, stops at the position to prevent the drawer from sliding out
- 5 The drawer can be fully pulled out, convenient for taking large items

MINEON Slide Product Technology



Surface Brightness



Shanghai materials



Dotted



Fastening Ball Rack



Rear Support



Right Angle

Mineon offers a wide variety of high-quality cold-rolled steel materials and exquisite production technology. The drawers slide smoothly back and forth with light and quiet operation, without any jamming. With a people-oriented design concept, built-in double springs for soft closing, it can effectively absorb external impact force and eliminate noise and vibration. The drawers can be fully pulled out, easy to remove or install without tools, convenient for daily cleaning. In addition, the ball bearing slides are equipped with a high-quality soft-closing device. The internal structure adopts the top technology of the furniture hardware industry, making the drawers open and close more smoothly.

Mineon Ball bearing slides with a wide variety of product designs, using high-quality cold-rolled steel material, exquisite and professional manufacturing. The drawers slide smoothly and silently without any stuck. People-oriented design concept, with double springs soft-closing equipment, can effectively absorb kinetic energy from external force and eliminate the noise and vibration. With detachable function, the drawers can be easily dismantled or installed without tools, convenient for routine cleaning.